

LED ALABASTER

Ceiling mounted • Damp location listed



Description:

One-light LED Flush Mount series featuring an etched Alabaster glass bowl. Fixtures are dimmable to 10% with Triac, phase forward or ELV dimmers.

Specifications:

- Antique Bronze (-020) (Painted)
- Steel construction
- Etched Alabaster glass bowl
- Dimmable to 10% brightness (See Dimming Notes)
- Unit covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 6" of wire supplied
- ENERGY STAR® qualified
- Meets California Title 24 JA8-2016

Performance:

| | |
|---------------------|--|
| Number of Modules | 1 |
| Input Power | 21w |
| Input Voltage | 120 V |
| Input Frequency | 50/60 Hz |
| Lumens/LPW | 1601/81 (LM-82) |
| CCT | 3000 K |
| CRI | 90+ |
| Life (hours) | 54,000 (L70/TM-21) |
| EMI/RFI | FCC Title 47, Part 15, Class B |
| Min. Start Temp | -25 °C |
| Max. Operating Temp | 25 °C |
| Warranty | 5 year warranty |
| Labels | ETL Damp location listed ENERGY STAR® qualified Meets California Title 24 JA8-2016 |

P350001-020-30


Images:



Dimensions:

Diameter: 11"

Height: 5-1/2"

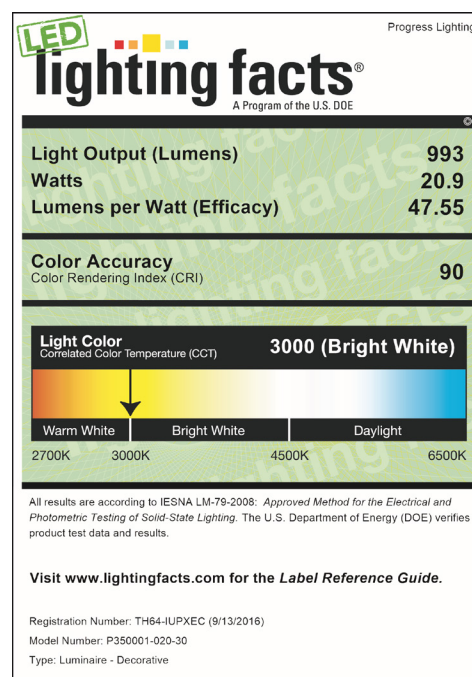

LED ALABASTER

Ceiling mounted • Damp location listed



P350001-020-30

Dimming Notes:

P350001-020-30 is designed to be compatible with many Tria/Forward Phase or ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

Lutron NTELV-300

Leviton 6672

Leviton 6674

Lutron AYL-600P

Lutron NTLV-600

Lutron MAELV-600

Lutron N-600

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.