

One-Light LED Pendant Kit

Ceiling stem hung mounted • Dry location listed



Description:

The Markor Series is a modular pendant system. The versatile series allow the choice of shades and stem kits. This one-light LED stem mounted pendant for use with Markor Shades. Shades sold separately. This stem may be used with all Markor shades 9"-22" sizes. Includes one 6", four 12" and one swivel.

Specifications:

- Antique Bronze (-20) (painted)
- Steel Construction
- LED Module is replaceable (part # 93053641)
- The Markor Series is a modular pendant system.
- One-light LED stem mounted pendant for use with Markor Shades.
- Shades sold separately.
- Includes one 6", four 12" and one swivel.
- 1,211 lumens 71.2 lumens/watt per module (source)
- 3000K color temperature, 90+ CRI.
- Dimmable to 10% brightness (See Dimming Notes)
- Canopy covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 10 feet of wire supplied
- One 6", four 12" lengths of stem included
- 9 gauge chain supplied
- ENERGY STAR® qualified

Performance:

Number of Modules	1
Input Power	17w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	1211/71.2 (LM-82)
Lumens/LPW (Delivered)	1039/62.6 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	60,000 (L70/TM-21)
FCC	Meets FCC Title 47, Part 15 Class B
Min. Start Temp	-30 °C
Max. Operating Temp	30 °C
Warranty	5 year warranty
Labels	cCSAus Dry location listed
	ENERGY STAR® qualified

P5198-2030K9

Images:



Dimensions:

Diameter: 5-3/4"
 Height: 5-3/8"
 Overall Ht. W/Stem: 62"

One-Light LED Pendant Kit

Ceiling stem hung mounted • Dry location listed



Photometrics:

P5198-2030K9

ELECTRICAL DATA	P5198-2030K9
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.142 A
Input Power	17
Power Factor	Greater than 0.90
THD	<20%
FCC	Meets FCC Title 47, Part 15 Class B
Operating Temperature	-30 °C to 30 °C
Dimming	Yes*

*See Dimming Notes for more information

P5198-2030K9


LED Light Engine: 3000 K 90 CRI

System Wattage: 17

Fixture delivered lumens: 1039

Fixture Efficacy: 62.6

Spacing Criteria: 1.3

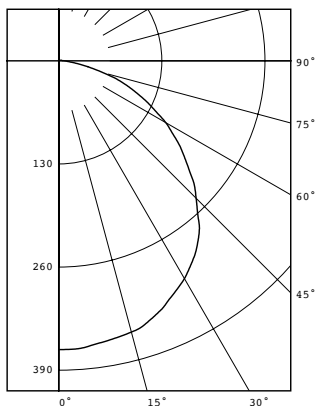

CANDELA DISTRIBUTION

DEG	CANDELA	LUMENS
0	364	
5	363	34
15	354	100
25	331	153
35	299	187
45	245	189
55	186	166
65	123	122
75	58	63
85	13	17
90	7	
95	4	5
105	3	3
115	0	1
125	0	0
135	0	0
145	0	0
155	0	0
165	0	0
175	0	0
180	0	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	287	27.7
0-40	474	45.6
0-60	829	79.8
0-90	1031	99.2
90-120	8	0.8
90-130	8	0.8
90-150	8	0.8
90-180	8	0.8
0-180	1039	100.0

Test 15.01408 Test Date 08/06/15

P5198-2030K9

Dimming Notes:

P5198 is designed to be compatible with many ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

Lutron Nova T NTELV-300

Lutron Vienti VTELV-600

Lutron Maestro MAELV-600

Lutron spacer/system SPSELV-600

Leviton Renoir II AWRMG-EAW

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.