

# STAINLESS STEEL THREADED IMC


## Features:

- Manufactured in Type 304 and 316 stainless steel to meet any stringent sanitary condition
- Polished with standard “brite” finish to increase corrosion resistance and aesthetic appearance
- No special tools or processes required for installation
- Standard NPT threads allow for trouble-free installations
- Lighter weight provides cost savings with labor and shipping
- Any custom size available up to 20’ in length



## Certifications and Compliances:

- UL 1242 Listed
- UL file number \_ E363502
- Inclusive for installation in accordance with Article 344 of ANSI/NFPA 70
- “National Electrical Code” (NEC)
- NSF / ANSI 169 Certified

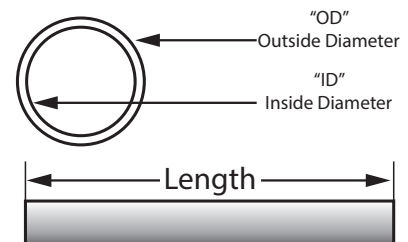

## Applications:

Stainless steel IMC is often specified in corrosive environments where it is subjected to harsh chemical treatments or wash-downs due to its lighter weight, precise tolerances, and ease of installation. Calbrite’s IMC is manufactured with or without threads. The threaded conduit can be used with compression or standard threaded couplings, allowing for lowered costs and simplified installations.

Type 304 Part Number	Type 316 Part Number	Trade Size (in)	Outside Diameter (OD) (in)	Inside Diameter (ID) (in)	Weight per Feet (lb)
S50510CTWT	S70510CTWT	½	0.840	0.660	0.620
S50710CTWT	S70710CTWT	¾	1.050	0.864	0.840
S51010CTWT	S71010CTWT	1	1.315	1.120	1.190
S51210CTWT	S71210CTWT	1¼	1.660	1.442	1.810
S51510CTWT	S71510CTWT	1½	1.900	1.703	1.940
S52010CTWT	S72010CTWT	2	2.375	2.170	2.390

All dimensions are for informational purposes only \*Tolerances +/- 5%



For more info visit [atkore.com/calbrite](http://atkore.com/calbrite)

