

AFC Metallic Whips Type UL

Conduit

Galvanized Type RW Steel Flexible Metal Conduit

Conductors

Solid or Stranded Copper
THHN 14AWG and Larger
18 & 16AWG TFN/TFFN

Maximum Temperature Rating

90°C (Dry)

Grounding

NEC® 250.118(5) Many Styles with Green Grounding Conductor

Maximum Voltage Rating


600V

References & Ratings

- UL 66, 83 and 348, File No. E96572



Description		Part Number	Units per Package	Description		Part Number	Units per Package
Solid Conductors				Stranded Conductors			
3/8 F x 6	18-2	4521-21	30	3/8 F x 6	18-2	4621-21	30
	18-2	4521-30	100		18-2	4621-30	100
	16-2	4511-21	30		16-2	4611-21	30
	16-2	4511-30	100		16-2	4611-30	100
	14-2	4501-21	30		14-2	4601-21	30
	14-2	4501-30	100		14-2	4601-30	100
	12-2	4578-21	30		12-2	4678-21	30
	12-2	4578-30	100		12-2	4678-30	100
3/8 F x 6	18-3	4522-21	30	3/8 F x 6	18-3	4622-21	30
	18-3	4522-30	100		18-3	4622-30	100
	16-3	4512-21	30		16-3	4612-21	30
	16-3	4512-30	100		16-3	4612-30	100
	14-3	4502-21	30		14-3	4602-21	30
	14-3	4502-30	100		14-3	4602-30	100
	12-3	4579-21	30		12-3	4679-21	30
	12-3	4579-30	100		12-3	4679-30	100
3/8 F x 6	18-4	4523-21	30	3/8 F x 6	18-4	4623-21	30
	18-4	4523-30	100		18-4	4623-30	100
	16-4	4513-21	30		16-4	4613-21	30
	16-4	4513-30	100		16-4	4613-30	100
	14-4	4503-21	30		14-4	4603-21	30
	14-4	4503-30	100		14-4	4603-30	100
	12-4	4580-21	30		12-4	4680-21	30
	12-4	4580-30	100		12-4	4680-30	100
1/2 F x 6	14-2	4701-15	15	1/2 F x 6	14-2	4801-15	15
	14-2	4701-24	50		14-2	4801-24	50
	12-2	4704-15	15		12-2	4804-15	15
	12-2	4704-24	50		12-2	4804-24	50
1/2 F x 6	14-3	4702-15	15	1/2 F x 6	14-3	4802-15	15
	14-3	4702-24	50		14-3	4802-24	50
	12-3	4705-15	15		12-3	4805-15	15
	12-3	4705-24	50		12-3	4805-24	50
1/2 F x 6	14-4	4703-15	15	1/2 F x 6	14-4	4803-15	15
	14-4	4703-24	50		14-4	4803-24	50
	12-4	4706-15	15		12-4	4806-15	15
	12-4	4706-24	50		12-4	4806-24	50

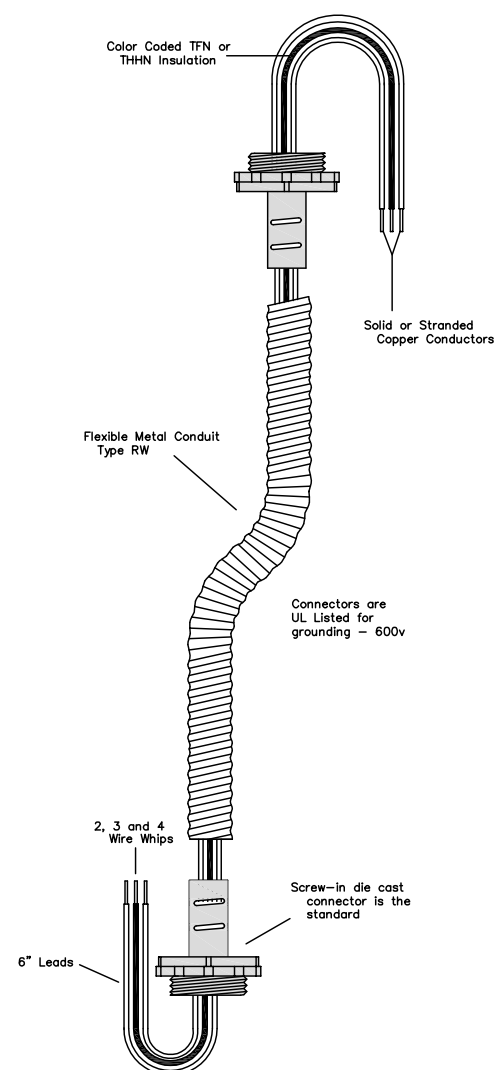

Whips come with standard 120/208V color THHN conductors but are also available with 277/480V colors if specified on order.

3/8" whips have screw in die cast connectors on the 18AWG, 16AWG & 14AWG and set screw die cast for the 12AWG.

1/2" whips have screw in die cast connectors.

Available with customer specified connectors by special order.

2 conductor is Black, White.

3 conductor is Black, White, Green.

4 conductor is Black, White, Red, Green.

All whips are available in barrels and cartons.