

Calconduit™

Rigid Conduit, Rigid & EMT Fittings

Galvanized Rigid Conduit Elbows - 45°

Application:

Galvanized Rigid Conduit (GRC) Elbows are to be installed on conduit raceways for underground stub-ups, and interconnection of conduit runs and other fittings.

Features:


Fabricated from UL listed hot-dipped galvanized rigid conduit
Threaded ends (NPT)

Certifications and Compliances:

- UL & CUL Listed - UL6
- UL File Number E226472
- UL6 with statements of conformance
- ANSI C80.1
- CalTrans Specification 86-2.05
- A.R.R.A. Available
- ASTM A239

Options:

Available in any degree of bend from 5° to 90°, and special radius

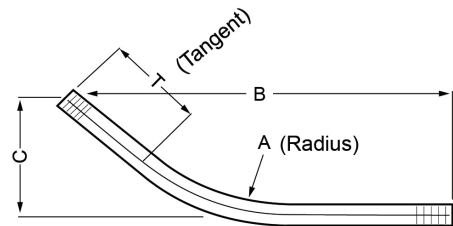

*All dimensions are for informational purposes only
Tolerances +/-5%

Size	Description	Weight (lbs)	Box Qty	A	B	C	T	Cut Length
ST0545EL00	1/2" X 45°	0.70	50	4.0	7.0	2.9	1.9	8.0
ST0745EL00	3/4" X 45°	0.90	50	4.5	7.4	3.0	2.0	9.0
ST1045EL00	1" X 45°	1.60	25	5.8	9.5	4.0	2.7	10.0
ST1245EL00	1-1/4" X 45°	2.90	20	7.3	13.1	5.4	4.3	15.5
ST1545EL00	1-1/2" X 45°	3.80	15	8.3	14.0	5.8	4.3	16.5
ST2045EL00	2" X 45°	5.40	10	9.5	16.1	6.6	5.4	18.5
ST2545EL00	2-1/2" X 45°	10.80	50	10.5	19.0	7.9	6.8	22.5
ST3045EL00	3" X 45°	14.70	35	13.0	20.5	8.5	6.7	23.5
ST3545EL00	3-1/2" X 45°	19.50	35	15.0	22.8	9.5	7.1	26.0
ST4045EL00	4" X 45°	29.30	35	16.0	29.2	12.1	10.5	33.5
ST5045EL00	5" X 45°	50.20	bulk	24.0	36.1	15.0	11.2	43.0
ST6045EL00	6" X 45°	77.60	bulk	30.0	42.9	17.8	12.8	48.0

Calconduit

12021 Woodruff Ave., Downey, CA 90241

Ph: (562) 803.4388 Ph: (800) 225.7473 Fax: (562) 803.4488 | calconduit.com

