



WORLDWIDE ELECTRIC MOTOR DATA SHEET

PEWWE15-18-254TC



HORSEPOWER	15		
RPM / POLES	1800 / 4		
VOLTAGE / PHASE	230 / 460 V / 3		
FRAME	254TC		
ENCLOSURE / DEGREE OF PROTECTION	TEFC / IP55		
FREQUENCY	60 HZ Suitable For 50 HZ Operation With 1.0 SF		
FULL LOAD SPEED	1765 RPM		
SERVICE FACTOR	1.25		
INSULATION CLASS	F		
FULL LOAD AMPS; 230 / 460	36.2 / 18.1 (Usable On 208V At 40 A)		
LOCKED ROTOR AMPS (STARTING); 230 / 460	232 / 116 A		
NO LOAD CURRENT	15 / 7.5 A		
NEMA CODE LETTER	G		
EFFICIENCY / POWER FACTOR	<u>LOAD</u>	<u>EFF.</u>	<u>P.F.</u>
	100 %	92.4%	0.84
	75 %	92.7%	0.79
	50 %	92.0%	0.69
DUTY CYCLE	S1 / Continuous		
TORQUE	<u>FULL LOAD</u>	<u>LRT</u>	<u>BDT</u>
	44.6 lb.ft.	190%	270%
SLIP	1.94 %		
NEMA DESIGN	B		
MOMENT OF INERTIA	1.89 lb.ft. ²		
MAX. TIME LOCKED ROTOR (Hot)	13 Seconds		
SOUND PRESSURE LEVEL	67 dB (A)		
MAX. AMBIENT TEMPERATURE	40° C		
MAX. ELEVATION	3300 Ft.		
TEMPERATURE RISE (At Full Load)	80° C		
DE BEARING	6309 C3		
ODE BEARING	6209 C3		
REGREASING INT. - DE BEARING	5000 Hours		
REGREASING INT. - ODE BEARING	5000 Hours		
GREASE TYPE	SKF LGHP 2		
MOUNTING	F1 (F2 Suitable)		
ROTATION	Bi-Directional		
SHAFT MATERIAL	1045 Carbon Steel		
INVERTER RATING	10:1 CT / 20:1 VT PWM Type		
CONNECTION DIAGRAM	230 / 460 V - 9 Lead Δ		
AREA CLASSIFICATION	Class I, Division 2, Groups A, B, C, D		
APPROXIMATE WEIGHT	265 lbs.		




CC006A





WORLDWIDE ELECTRIC MOTOR DRAWING

PEWWE-254TC

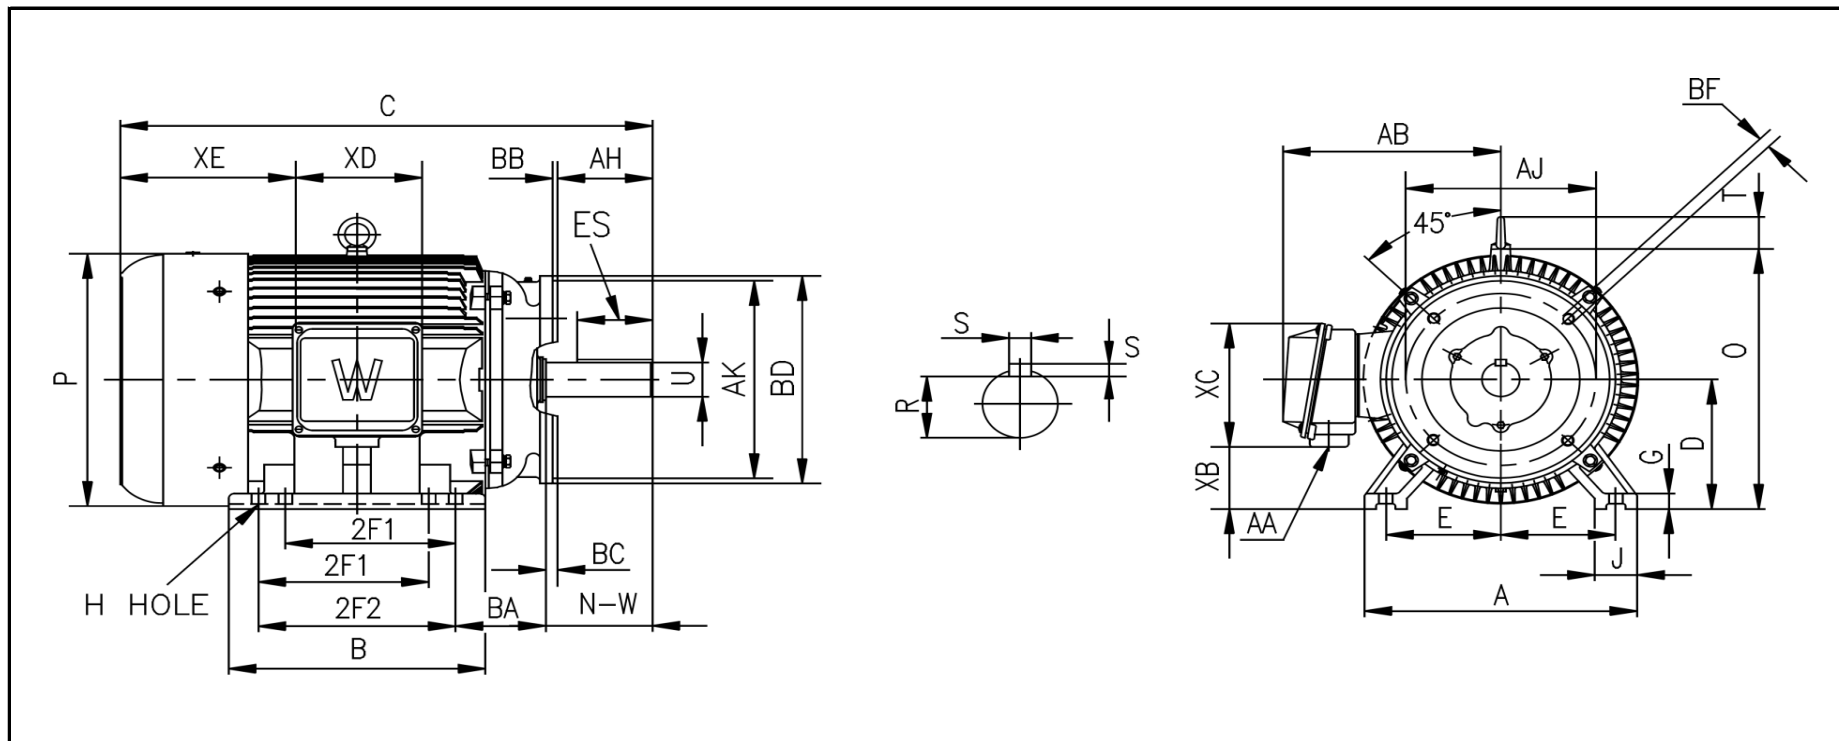

DIMENSIONS - INCHES

MOUNTING					A	B	C	D	G	J	P	O	T	AB
E	2F1	2F2	H	BA										
5	-	8.25	0.53	4.25	12.5	10.3	23.5	6.25	0.79	2.4	12.6	12.9	2.05	10.5

KEY		KEYSET	FLANGE					SHAFT		TERMINAL BOX				
S	ES	R	AK	AJ	BF	BB	BD	N-W	U	AA	XB	XC	XD	XE
0.375	2.91	1.416	8.5	7.25	1/2 - 13	0.25	10	4	1.625	1.5	3	7.4	6.3	7.97

REVISED - 08/11/17