


Security Lights




TDD



TDD65



TDD

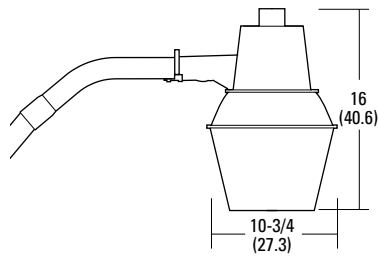

TDD65

Catalog Number
Notes
Type

Hit the Tab key or mouse over the page to see all interactive elements.

Ordering Information

Catalog Number	UPC	Description	Wattage	Lamp Source	Voltage	Mounting Arm Length	Lamp Included	Approx. Weight (lbs)	Pallet Qty	Standard Carton Qty
TDD100ML 120 M2	745974100140	12" security light	100	MH	120	24"	Y	12	24	2
TDD150SL 120 M2	745973506172	12" security light	150	HPS	120	24"	Y	12	24	2
TDD65L 120 M2	745974487494	10" security light	65	Fluorescent	120	18"	Y	4	32	2

Accessories: Order as separate catalog number.	
CF65QT41 M6	Replacement for 65W fluorescent lamp.
RK1 TDDLENS M6	Reflector/lens assembly for HID only.
OMA	Mounting arm

FEATURES & SPECIFICATIONS

INTENDED USE

Arm-mounted security light for yards and lots, service roads and building perimeters.

Certain airborne contaminants can diminish the integrity of acrylic and/or polycarbonate. [Click here for Acrylic-Polycarbonate Compatibility table for suitable uses.](#)

CONSTRUCTION

Rugged, die-cast aluminum head.

Formed aluminum reflector and open-bottom refractor for ease of maintenance and lamp replacement. Prismatic refractor provides uniform symmetrical Type V distribution. Mounting arm and all mounting hardware included in carton. Photocell and lamp are included. 120V.

LISTINGS

Listed and labeled to UL standards for wet locations.

Listed and labeled to CSA standards.

WARRANTY

2-year limited warranty. Complete warranty terms located at:

www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.

