



KTEB-454HO-UV-PS

T5HO ELECTRONIC BALLAST

Version D3

DESCRIPTION

4 x F54T5HO | 120-277 Multi-Voltage | High Power Factor | Program Start | 90°C Rated



STARTING METHOD: Program Start
LAMP CONNECTION: Series
INPUT VOLTAGE: 120-277Vac ±10%
INPUT FREQUENCY: 50/60 Hz
POWER FACTOR: High
WARRANTY: 5 Years



PRODUCT FEATURES

- 2014 DOE Compliant
- Sound Rated: A
- Minimum Starting Temperature: -20°F, -29°C
- Maximum Case Temperature: 194°F, 90°C
- Meets FCC Part 18 (Class A) Non-Consumer Limits
- Meets ANSI Standard C82.11 and C62.41
- Output Voltage: 400V
- Voltage to Ground: 360V
- UL, cUL Listed Class P, Type 1 Outdoor
- Lamp End-of-Life Protected
- Type HL, Type CC

ELECTRICAL SPECIFICATIONS

CONTINUED ON PAGE 2

LAMP TYPE	NO. OF LAMPS	INPUT VOLTS	INPUT WATTS	NOMINAL LINE AMPS	POWER FACTOR	BALLAST FACTOR	BALLAST EFFICACY FACTOR	MAX THD	CREST FACTOR	WIRING DIAGRAM
F54T5HO	4	120V	240	1.93	>0.90	1.00	0.42	<10%	<1.70	F4-10
		277V	235	0.83	>0.90	1.00	0.43	<10%	<1.70	F4-10
	3	120V	184	1.42	>0.90	1.02	0.55	<10%	<1.70	F3-12, F3-13
		277V	182	0.61	>0.90	1.02	0.56	<10%	<1.70	F3-12, F3-13
	2	120V	122	1.02	>0.90	1.00	0.82	<10%	<1.70	F2-28
		277V	120	0.45	>0.90	1.00	0.83	<10%	<1.70	F2-28
	1	120V	64	0.58	>0.90	1.02	1.59	<10%	<1.70	F2-28
		277V	64	0.28	>0.90	1.02	1.59	<12%	<1.70	F2-28
F54T5HO/ES (49W)	4	120V	215	1.83	>0.90	1.00	0.46	<10%	<1.70	F4-10
		277V	210	0.77	>0.90	1.00	0.47	<10%	<1.70	F4-10
	3	120V	162	0.37	>0.90	1.02	0.63	<10%	<1.70	F3-12, F3-13
		277V	160	0.59	>0.90	1.02	0.64	<10%	<1.70	F3-12, F3-13
	2	120V	107	0.90	>0.90	1.00	0.94	<10%	<1.70	F2-28
		277V	107	0.40	>0.90	1.00	0.94	<10%	<1.70	F2-28
	1	120V	56	0.47	>0.90	1.02	1.82	<10%	<1.70	F2-28
		277V	56	0.23	>0.90	1.02	1.82	<20%	<1.70	F2-28
FT55W/2G11	4	120V	223	1.90	>0.90	0.85	0.38	<10%	<1.70	F4-10
		277V	217	0.80	>0.90	0.85	0.39	<10%	<1.70	F4-10
	3	120V	170	1.43	>0.90	0.87	0.51	<10%	<1.70	F3-12, F3-13
		277V	168	0.62	>0.90	0.87	0.52	<10%	<1.70	F3-12, F3-13
	2	120V	113	0.95	>0.90	0.85	0.75	<10%	<1.70	F2-28
		277V	113	0.42	>0.90	0.85	0.75	<10%	<1.70	F2-28
	1	120V	60	0.50	>0.90	0.87	1.45	<10%	<1.70	F2-28
		277V	60	0.24	>0.90	0.87	1.45	<15%	<1.70	F2-28



KTEB-454HO-UV-PS

T5HO ELECTRONIC BALLAST

Version D3


ELECTRICAL SPECIFICATIONS

CONTINUED FROM PAGE 1

LAMP TYPE	NO. OF LAMPS	INPUT VOLTS	INPUT WATTS	NOMINAL LINE AMPS	POWER FACTOR	BALLAST FACTOR	BALLAST EFFICACY FACTOR	MAX THD	CREST FACTOR	WIRING DIAGRAM
FT50W/2G11	4	120V	240	2.00	>0.90	1.08	0.45	<10%	<1.70	F4-10
		277V	235	0.85	>0.90	1.08	0.46	<10%	<1.70	F4-10
	3	120V	182	1.52	>0.90	1.10	0.60	<10%	<1.70	F3-12, F3-13
		277V	179	0.66	>0.90	1.10	0.61	<10%	<1.70	F3-12, F3-13
	2	120V	120	1.00	>0.90	1.08	0.90	<10%	<1.70	F2-28
		277V	119	0.44	>0.90	1.08	0.91	<10%	<1.70	F2-28
	1	120V	63	0.53	>0.90	1.10	1.75	<10%	<1.70	F2-28
		277V	63	0.25	>0.90	1.10	1.75	<15%	<1.70	F2-28
FT36W/2G11	4	120V	165	1.39	>0.90	1.08	0.66	<10%	<1.70	F4-10
		277V	165	0.61	>0.90	1.08	0.66	<10%	<1.70	F4-10
	3	120V	126	1.06	>0.90	1.10	0.87	<10%	<1.70	F3-12, F3-13
		277V	126	0.47	>0.90	1.10	0.87	<10%	<1.70	F3-12, F3-13
	2	120V	86	0.72	>0.90	1.08	1.26	<10%	<1.70	F2-28
		277V	86	0.33	>0.90	1.08	1.26	<12%	<1.70	F2-28
F58T8	4	120V	221	1.89	>0.90	1.03	0.47	<10%	<1.70	F4-10
		277V	217	0.80	>0.90	1.03	0.48	<10%	<1.70	F4-10
	3	120V	167	1.40	>0.90	1.05	0.63	<10%	<1.70	F3-12, F3-13
		277V	164	0.60	>0.90	1.05	0.64	<10%	<1.70	F3-12, F3-13
	2	120V	110	0.93	>0.90	1.03	0.94	<10%	<1.70	F2-28
		277V	110	0.41	>0.90	1.03	0.94	<10%	<1.70	F2-28
	1	120V	57	0.48	>0.90	1.05	1.84	<10%	<1.70	F2-28
		277V	57	0.23	>0.90	1.05	1.84	<20%	<1.70	F2-28

PHYSICAL SPECIFICATIONS

CASE DIMENSIONS

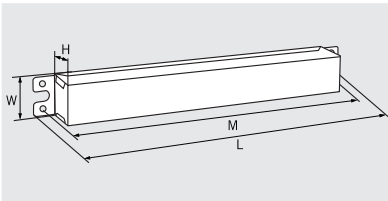

LENGTH	16.70"
WIDTH	1.70"
HEIGHT	1.18"
MOUNTING	16.09"
CASE STYLE	L10

STANDARD LEAD LENGTHS*

BLACK	25"
WHITE	25"
GRAY	25"
BLUE	25"
BLUE/WHITE	25"
RED	25"
RED/WHITE	25"
YELLOW	50"
ORANGE	50"

Lead wires are 18 AWG 105 C/600V, solid copper.

CASE MATERIAL: Steel

*Consult Keystone for special lead length requirements.




KTEB-454HO-UV-PS

T5HO ELECTRONIC BALLAST


Version D3

WIRING DIAGRAMS


F4-10

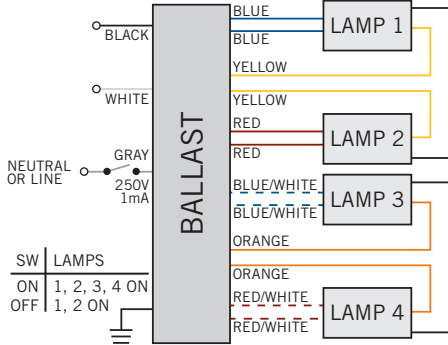


F3-12

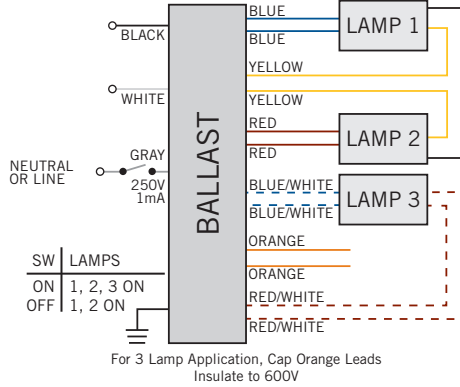

F3-13

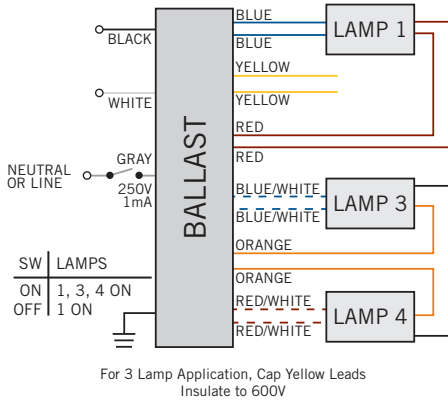

F2-28

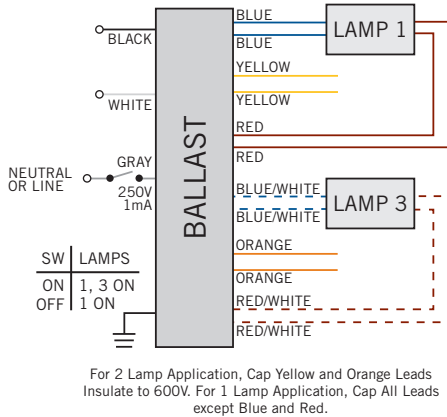

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTEB-454HO-UV-PS-CP	Carton Pack	8	Quick Ship
KTEB-454HO-UV-PS-DP	Distributor Pack	8	Quick Ship

NOTE: Version D3 (Manufacturing Revision). Prior versions of this ballast exist. Spec sheets for prior versions available upon request. Contact Keystone for details.

CATALOG NUMBER BREAKDOWN

KTEB-454HO-UV-PS-CP

Keystone Technologies Electronic Ballast | 4 Lamp | Wattage | High Output | Universal Voltage | Program Start | Packaging Style