




KT-LED45HID-E26-840-D /G2

HID REPLACEMENT LED LAMP

DESCRIPTION

45W HID Replacement LED Lamp | 4000K | >80 CRI | IP64 Rated

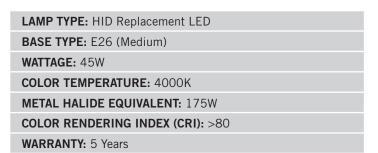



C(UL)US LISTED

RoHS Compliant

PRODUCT FEATURES

- Replacement for Conventional Metal Halide Lamp
- Non-Dimmable; Do Not Dim
- 50,000+ Hour Lifetime
- Environmentally Friendly: No Mercury Used
- Instant Startup
- UL Listed

- Operating Temperature: -40°C/-40°F to 60°C/140°F
- Integral Driver, Eliminates the Need for External Driver or Ballast; Includes 4kV Surge Protection
- IP64 Rated; Integrated Heat Sink Quickly Dissipates Heat and Guides Water Intrusion Out of the Lamp
- Suitable for Use in Fully Enclosed Fixture

OPERATING SPECIFICATIONS

ELECTRICAL CHARACTERISTICS

Input	Voltage	Power Consumption	Power Factor	Input Current
120-2	277Vac	45W	>0.9	0.38A @ 120V 0.16A @ 277V


RATED LIFE

L70 (Hours)	50,000


PHOTOMETRIC CHARACTERISTICS

Color Temperature (CCT)	4000K	
Luminous Flux	6570 lm	
Color Rendering Index (CRI)	>80	
Efficacy	146 lm/W	
Visible Light Area	360°	

SPECTRAL DISTRIBUTION

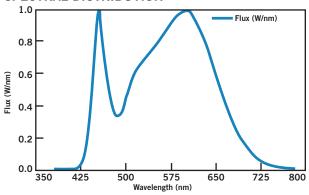

LUX DISTANCE CURVE

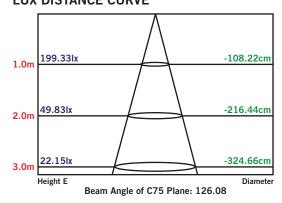





KT-LED45HID-E26-840-D /G2

HID REPLACEMENT LED LAMP

WIRING DIAGRAM

STEP 1


Disconnect power. Disconnect and remove existing ballast, capacitor, and/or ignitor (where applicable) from fixture.


STFP 2


Rewire for line voltage to the lamp socket.


STEP 3

Install new LED replacement lamp. Ensure lamp is operating properly when power is turned on.











PHYSICAL CHARACTERISTICS

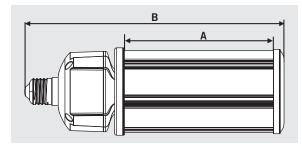



LAMP DIMENSIONS

A (Illuminated Length)	5.07"
B (Body Length)	9.13"
C (Diameter)	3.34"

BASE TYPE: E26 (Medium)

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KT-LED45HID-E26-840-D /G2-DP	Distributor Pack (Individual Cartons)	16	Quick Ship

CATALOG NUMBER BREAKDOWN

