

Renew Select Collection

50" Renew Select Ceiling Fan MWH

330110MWH (Matte White)

Project Name: _____

Location: _____

Type: _____

Qty: _____

Comments: _____

Product Information

Product ID	330110MWH
Finish	Matte White
Blade Finish	Matte White/Matte White
Collection	Renew Select Collection

Airflow, Power and Efficiency

Speed	RPM	CFM	CFM/ Watt	Amps	Watts
High	202	4898	72	.59	68
Med	152	3795	101	.45	38
Low	72	1745	178	.23	10

Specifications

Number of Blades	5
Blades Included	Yes
Blade Pitch	12 Degrees
Blade Sweep	50"
Blades Reversible	No
Blade Material	WOOD
Optional Blades Available	No
Downrod 1	1.00 OD X 4.00
Downrod 2	FLUSH MOUNT

Pull Chain - In project applications using multiple ceiling fans, alternative remote controls may be required. Please contact Kichler Advanced Product Solutions at 844-542-4537 to confirm your project requirements.


Primary Control System	
Remote Included	No
Wall Control Included	No
Low Ceiling Adaptable	Yes, Dual Mount Included
Lead Wire Length	78.00"
Motor Size	153MM X 15MM
Motor Type	AC

Downlight

Downlight Included	Yes
Light Source	Incandescent



Dimensions

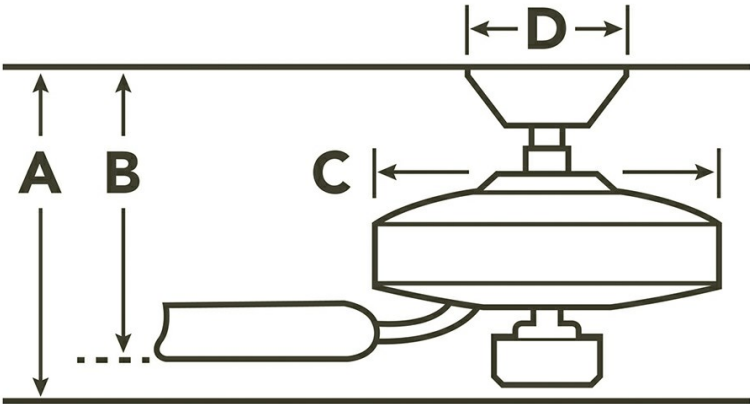

Downrod	A	B	C	D
1.00 OD X 4.00	18.40	10.50	11.75	5.90
FLUSH MOUNT	14.90	7.00	11.75	5.90

Renew Select Collection

50" Renew Select Ceiling Fan MWH

330110MWH (Matte White)

Project Name: _____

Location: _____

Type: _____

Qty: _____

Comments: _____

Available Finishes

Finish	Fixture	Glass	Blade 1	Blade 2
Brushed Stainless Steel	330110BSS	WHITE ETCHED	MEDIUM OAK	DARK OAK
Brushed Nickel	330110NI	WHITE ETCHED	CHERRY	WALNUT
Oil Brushed Bronze	330110OBB	WHITE ETCHED	CHERRY	WALNUT
Oil Brushed Bronze	330110OBBU	UMBER ETCHED	CHERRY	WALNUT
Tannery Bronze	330110TZ	UMBER ETCHED	DARK CHERRY	TEAK
White	330110WH	WHITE ETCHED	WHITE	WHITE
Matte White	330110MWH	WHITE ETCHED	MATTE WHITE	WEATHR WHT WLNT
Sterling Gold	330110SGD	UMBER ETCHED	WALNUT	STERLING GOLD

Downlight Bulb Included	Included
Downlight Bulb Type	B8
# of Bulbs/LED Modules	3
Watts	68/38/10
Max or Nominal Watt	60W
Glass Description	White Etched
Optional Light Kit Available	No

Safety Listings & Certifications

Safety Rated	Dry
Warranty	www.kichler.com/warranty

Installation

Installation requirements	The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked ""For Fan Support""
Electrical Requirements	120V 60Hz AC
Hanging Weight	27.5 LBS
Minimum Distance Between Bottom Of Fan Blade To Floor	7.5 feet

Control Options

Product ID	Descr
337001WH	Universal Remote Control
337010ALM	Fan 4 Speed-Light Dimmer
337010IV	Fan 4 Speed-Light Dimmer
337010WH	Fan 4 Speed-Light Dimmer
337011ALM	Fan Light Dimmer Control
337011IV	Fan Light Dimmer Control
337011WH	Fan Light Dimmer Control
337012ALM	4 Speed Fan Slide Control
337012IV	4 Speed Fan Slide Control
337012WH	4 Speed Fan Slide Control
337214	Limited Function Cooltouch
370039MUL	Wall Control System L-Function
371042MUL	56K Wall Control System Basic