
Renew Select Collection 50 Inch Renew Select Ceiling Fan TZ

330110TZ (Tannery Bronze)



Dimensions

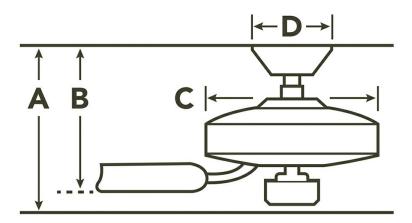

Downrod	Α	В	С	D
1.00 OD X 4.00	18.40	10.50	11.75	5.90
FLUSH MOUNT	14.90	7.00	11.75	5.90

Project Name:
Location:
Туре:
Qty:
Comments:

Product Information

Product ID	330110TZ
Finish	Tannery Bronze
Blade Finish	Dark Cherry/Teak
Collection	Renew Select Collection

Airflow, Power and Efficiency

Speed	RPM	CFM	CFM/ Watt	Amps	Watts
High	202	4898	72	.59	68
Med	152	3795	101	.45	38
Low	72	1745	178	.23	10

Specifications

opodinoationo	
Number of Blades	5
Blades Included	Yes
Blade Pitch	12 Degrees
Blade Sweep	50"
Blades Reversible	No
Blade Material	WOOD
Optional Blades Available	No
Downrod 1	1.00 OD X 4.00
Downrod 2	FLUSH MOUNT
Primary Control System	Pull Chain - In project applications using multiple ceiling fans, alternative remote controls may be required. Please contact Kichler Advanced Product Solutions at 844-542-4537 to confirm your project requirements.
Remote Included	No
Wall Control Included	No
Low Ceiling Adaptable	Yes, Dual Mount Included
Lead Wire Length	78.00"
Motor Size	153MM X 15MM
Motor Type	AC
Downlight	
Downlight Included	Yes

Downingrit		
Downlight Included	Yes	
Light Source	Incandescent	

Kichle



Renew Select Collection 50 Inch Renew Select Ceiling Fan TZ

330110TZ (Tannery Bronze)

Available Finishes

Finish	Fixture	Glass	Blade 1	Blade 2
Brushed Stainless Steel	330110BSS	WHITE ETCHED	MEDIUM OAK	DARK OAK
Brushed Nickel	330110NI	WHITE ETCHED	CHERRY	WALNUT
Oil Brushed Bronze	330110OBB	WHITE ETCHED	CHERRY	WALNUT
Oil Brushed Bronze	330110OBBU	UMBER ETCHED	CHERRY	WALNUT
Tannery Bronze	330110TZ	UMBER ETCHED	DARK CHERRY	TEAK
White	330110WH	WHITE ETCHED	WHITE	WHITE
Matte White	330110MWH	WHITE ETCHED	MATTE WHITE	WEATHR WHT WLNT
Sterling Gold	330110SGD	UMBER ETCHED	WALNUT	STERLING GOLD

Control Options

Product ID	Descr
337001WH	Universal Remote Control
337010ALM	Fan 4 Speed-Light Dimmer
337010IV	Fan 4 Speed-Light Dimmer
337010WH	Fan 4 Speed-Light Dimmer
337011ALM	Fan Light Dimmer Control
337011IV	Fan Light Dimmer Control
337011WH	Fan Light Dimmer Control
337012ALM	4 Speed Fan Slide Control
337012IV	4 Speed Fan Slide Control
337012WH	4 Speed Fan Slide Control
337214	Limited Function Cooltouch
370039MUL	Wall Control System L-Function
371042MUL	56K Wall Control System Basic

Project Name: Location:	
Туре:	
Qty:	
Comments:	
Downlight Bulb Included	Included
Downlight Bulb Type	B8
# of Bulbs/LED Modules	3
Watts	68/38/10
Max or Nominal Watt	60W
Glass Description	Umber Etched
Optional Light Kit Available	No
Safety Listings & Ce Safety Rated	prtifications Dry
Warranty	
,	www.kichler.com/warranty
Installation	www.kichler.com/warranty
Installation Installation requirements	The electrical junction box and support structure must be securely mounted and
	The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes
Installation requirements	The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked ""For Fan Support""

7.5 feet

Minimum Distance Between Bottom Of Fan Blade To

Floor

Project Name:

