


GNDCL GROUNDING LUG

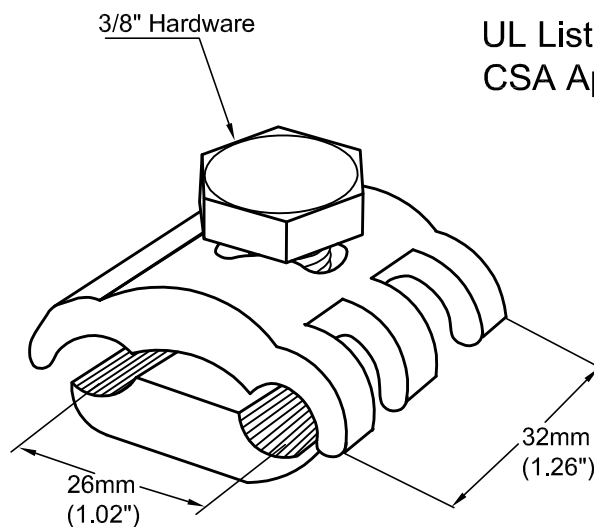

NOTE:
USE ONE ON EACH 60' OF TRAY RUN AND
AT TRAY ENDS OR IF TRAY IS AN
EQUIPMENT GROUNDING CONDUCTOR,
ONE FOR EACH TRAY SECTION.
ACCOMMODATES GAUGES 1/0 - #6 AWG.
IMAGE OF LUG PROVIDED MAY VARY.
RECOMMENDED TORQUE: 12 +/- 2 ft-lbs

lb
0.23

CU

GNDCL

0.23