


IG5262, IG5362

Isolated ground receptacle with durable, solid construction.

Featuring an impact-resistant nylon face, plated steel strap, and triple-wipe brass power contacts, these receptacles are built tough. They also feature our patented screw-pressure plate back wire clamp on ground for fast installation.

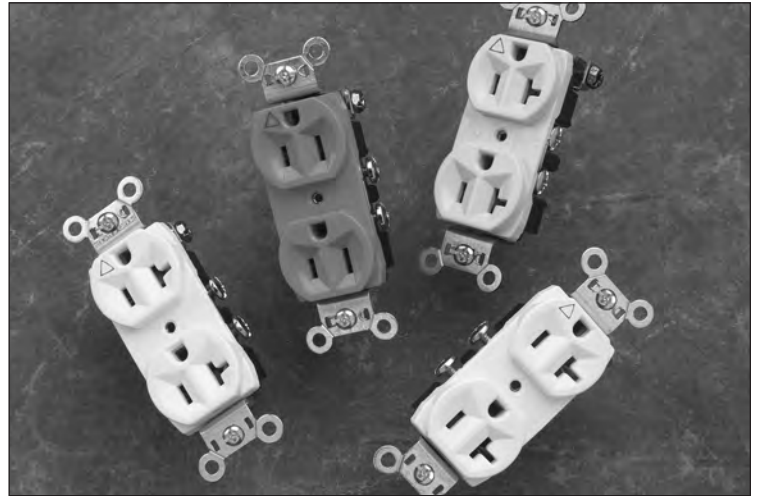

Features & Benefits

IG symbol and "Isolated Ground" markings for easy I.D. and circuit delineation.

Triple-wipe brass contacts ensure lasting, positive contact with plug blades.

High-impact resistant nylon face resists impacts and scrapes.

Corrosion-resistant plated steel strap.

Patented feature, external screw-pressure-plate back wire clamp on ground terminal for faster, easier installation.

Plastic barrier isolates grounding terminal from mounting strap and metal boxes.

Side and internal screw-pressure-plate back wire capability with #14 – #10 AWG copper or copper-clad, solid or stranded wire.

Auto-ground clip assures positive ground.

IG5262

Field Uses/Vertical Markets

- Education
- Office
- Institutional
- Hospitality/Lodging
- Retail



Pass & Seymour

TVSS & Isolated Ground Devices Specification Grade IG 15 & 20A, 125V

Ordering Information

Catalog Number	Rating A. V.	NEMA Config. No.	Color
Duplex Receptacles Back & Side Wire			
IG5262	15 125	5-15R	Orange
IG5262-I	15 125	5-15R	Ivory
IG5262-GRY	15 125	5-15R	Gray
IG5262-RED	15 125	5-15R	Red
IG5262-LA	15 125	5-15R	Light Almond
IG5362	20 125	5-20R	Orange
IG5362-I	20 125	5-20R	Ivory
IG5362-W	20 125	5-20R	White
IG5362-GRY	20 125	5-20R	Gray
IG5362-RED	20 125	5-20R	Red
IG5362-LA	20 125	5-20R	Light Almond



NEMA
5-15R



NEMA
5-20R

For more information on these and other P&S products refer to our Catalog or visit our web site.

SF1306R1 — Updated June 2006 — For latest specs visit www.legrand.us/passandseymour


TVSS & Isolated Ground Devices Specification Grade IG 15 & 20A, 125V



Pass & Seymour

Technical Specifications

3rd Party Compliance	
UL Listed, File Number E140596, Standard UL498.	
Federal Specification WC596.	
CSA Certified.	



Dimensions for
15 & 20 Amp

Performance	
Electrical	
Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Max 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current
Mechanical	
Terminal Identification	Terminal Identification in accordance with UL498 (Brass, White, Green)
Terminal Accommodation	#14 AWG – #10 AWG copper conductor only
Product Identification	Ratings are a permanent part of the device
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40° (without impact)

Materials			
Face	Nylon	Ground Screw	#8 Hex Tri-Drive Steel
Back Body	PVC	Assembly Drive Screw	Plated Steel
Line Contacts	.032 688 Brass	Auto-Ground Clip	Steel
Mounting Strap	.042 Plated Steel	Mounting Screws	Tri-Drive Steel
Ground Contacts	.040 260 Brass	Ground Wire Pressure Plate	Brass
Pressure Plate	.080 Steel		
Terminal Screws	#8 Tri-Drive Steel		

Warranty


1 Year

Complementary Devices & Accessories



TVSS & ISOLATED GROUND

- Heavy-Duty Isolated Ground
- Heavy-Duty Turnlok® Isolated Ground
- Heavy-Duty Isolated Ground TVSS
- Heavy-Duty TVSS
- Construction Grade TVSS

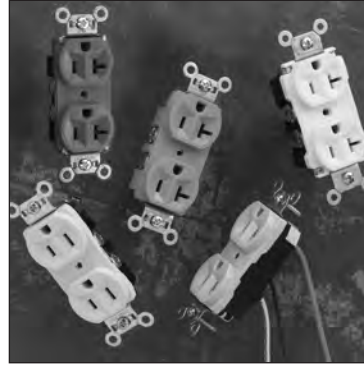


STRAIGHT BLADE RECEPTACLES

- Extra Heavy-Duty
- Heavy-Duty
- Construction Grade
- Construction Grade Leaded
- Commercial Grade




DECORATOR DEVICES

- Construction Grade Switches
- Specification Grade Combo Switches
- Construction Grade Receptacles
- Commercial Grade Receptacles
- Specification Grade Hallway Lights

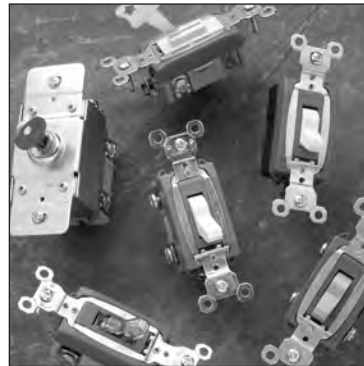

SWITCHES

- Extra Heavy-Duty
- Extra Heavy-Duty Lighted
- Extra Heavy-Duty Security
- Extra Heavy-Duty Locking
- Hard Use
- Commercial Grade

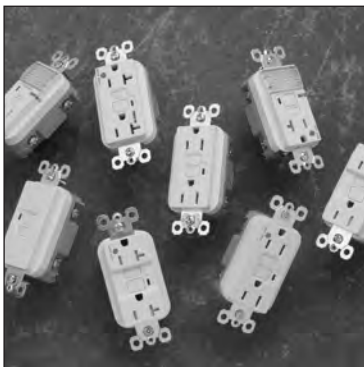

GFCIs

- Specification Grade
- Dead Front



WALL PLATES

- TradeMaster® Thermoplastic Nylon
- Screwless Polycarbonate
- Stainless Steel
- Brass
- Aluminum
- Dustproof Stainless Steel Covers

Also available...

- Light Almond Devices
- Hospital Grade Devices
- PlugTail™ Devices
- Ground Continuity Monitoring (GCM)
- Straight Blade Plugs & Connectors
- Turnlok® Locking Devices
- Weatherproof Boxes & Covers
- IEC 309 Industrial Products
- Flexcor® Wire Mesh Grips



Legrand/Pass & Seymour
P.O. Box 4822
Syracuse, NY 13221-4822
800-223-4185

North America Headquarters
60 Woodlawn Street
West Hartford, CT 06110
Phone: 1.877.BY.LEGRAND (295.3472)
Fax: 1.860.232.2062
www.legrand.us

Legrand Canada
570 Applewood Crescent
Vaughan, ON, L4K 4B4
Phone: 905.738.9195
Fax: 905.738.9721
www.legrand.ca