



PlugTail®. The fastest, most consistent and reliable wiring devices – ever.

PT5262A, PT5362A

Factory-terminated wiring devices are what you get with PlugTail wiring devices. Wiring devices are terminated the same no matter what the skill level. The UL-Listed connectors are keyed to ensure proper wiring installation into each extra heavy-duty receptacle. Just snap the connector into the back of the device — no fussing with wires, stripping, or tightening screws. PlugTail devices are finger safe with no exposed terminals, so taping is not required.

Features & Benefits

Auto-ground clip assures positive ground.

Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.


Large brass contacts snugly terminate on device blade terminals. Audible snapping latch assures connection, allows release.

Exclusive patented feature, circuit label on face allows permanent circuit identification.


.036 inch thick, brass, triple-wipe power contacts for lasting retention.

Two drive screws anchor strap to back body and face.

Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body.

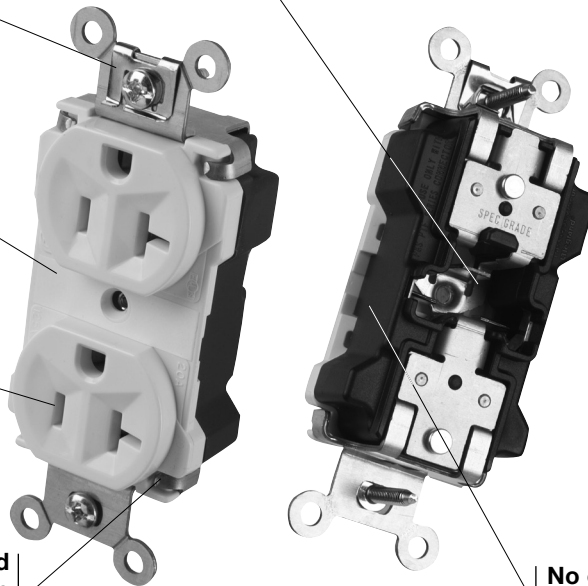

PT5362AW

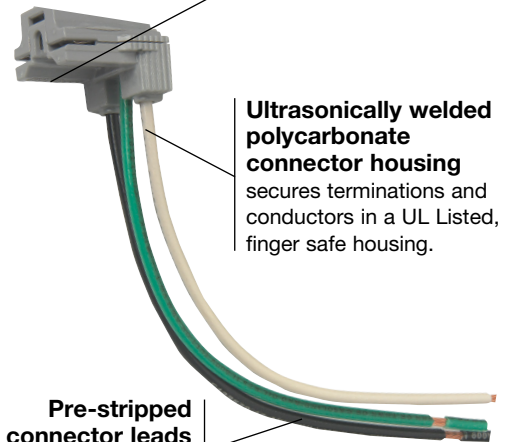


Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.

Pre-stripped connector leads fasten to conductors, easier than standard pigtails.

No exposed terminals before, during, or after installation increases safety at all phases of product life.

3rd Party Compliance

 cULus Listed, File Number E140596, Standard UL498. Federal Specification WC596.

Technical Information

Performance

Electrical

Dielectric Voltage	Withstands 2000V Minimum
Maximum Working Voltage	125V
Current Interrupting	Certified for current interrupting at full-rated current (receptacle only)
Temperature Rise	Maximum 30°C temperature at full-rated current after 50 cycles of overload at 150% of rated current with direct current

Mechanical

PlugTail Connector Identification	#12 AWG, THHN, copper conductor, 6" leads, stripped, solid or stranded, for use with PlugTail Receptacles only
Production Identification	Ratings are a permanent part of the device

Environmental

Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C without impact

PlugTail® Receptacle Materials

Face	Nylon
Back Body	Nylon
Line Contacts	.036 688 Brass
Mounting Strap	.050 260 Brass
Integral Ground System	.036 260 Brass
Assembly Drive Screw	Zinc-Plated Steel
Auto-Ground Clip	Brass
Mounting Screw	Tri-Drive Steel

PlugTail® Connector Materials

Housing	Polycarbonate
Contacts	.036 688 Brass

Warranty


1 Year




NEMA
5-15R



NEMA
5-20R

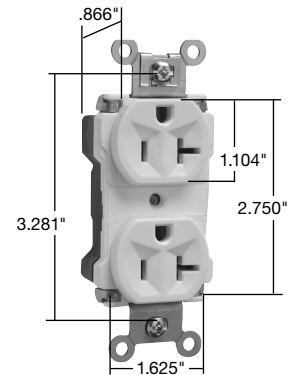

**Dimensions for
15 & 20 Amp**

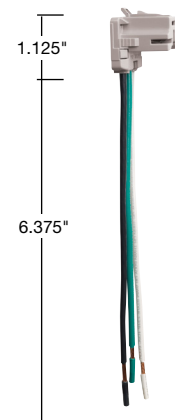

PTR6STR

Ordering Information

Duplex Receptacles

Catalog Number	Rating		Color	NEMA Config. No.
	A	VAC		
PT5262AI	15	125	Ivory	5-15R
PT5262AW	15	125	White	5-15R
PT5262A	15	125	Brown	5-15R
PT5262AGRY	15	125	Gray	5-15R
PT5262ABK	15	125	Black	5-15R
PT5262ABL	15	125	Blue	5-15R
PT5262ARED	15	125	Red	5-15R
PT5262ALA	15	125	Light Almond	5-15R
PT5362AI	20	125	Ivory	5-20R
PT5362AW	20	125	White	5-20R
PT5362A	20	125	Brown	5-20R
PT5362AGRY	20	125	Gray	5-20R
PT5362ABK	20	125	Black	5-20R
PT5362ABL	20	125	Blue	5-20R
PT5362ARED	20	125	Red	5-20R
PT5362ALA	20	125	Light Almond	5-20R

PlugTail Connectors — Right Angle


Catalog Number	Wire Type	Wire Length
PTRA6STR	Stranded	6"
PTRA6SOL	Solid	6"

Vertical Markets

- Education
- Institutional
- Retail
- Office
- Hospitality/Lodging
- Multiple Dwelling

Also available

- Hospital Grade Devices
- Surge Protected & Isolated Ground Devices
- Ground Continuity Monitoring (GCM)
- Straight Blade Plugs & Connectors
- Turnlok® Locking Devices
- Plug Load Devices
- Weatherproof Boxes & Covers
- IEC 309 Industrial Products
- Flexcor® Wire Mesh Grips
- USB Charging Devices

 The paper used to print this document is an environmentally responsible paper with 10% post consumer waste, with FSC and SFI Chain of Custody certifications, Lacey Act compliant. 100% of the electricity used to manufacture Flo sheets is generated with Green-e certified renewable energy.

All brand and product names referenced in this document are registered trademarks or trademarks of their respective holders.



Legrand, North America
60 Woodlawn Street
West Hartford, CT 06110
1.877.BY.LEGRAND (295.3472)
www.legrand.us
9024 Keele Street
Concord, ON L4K 2N2
905.738.9195
www.legrand.ca

FOLLOW US

