
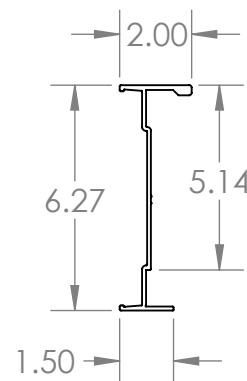


PW Ladder Cable Tray Straight Section

6A20C

6"(H) Side Rail Tray

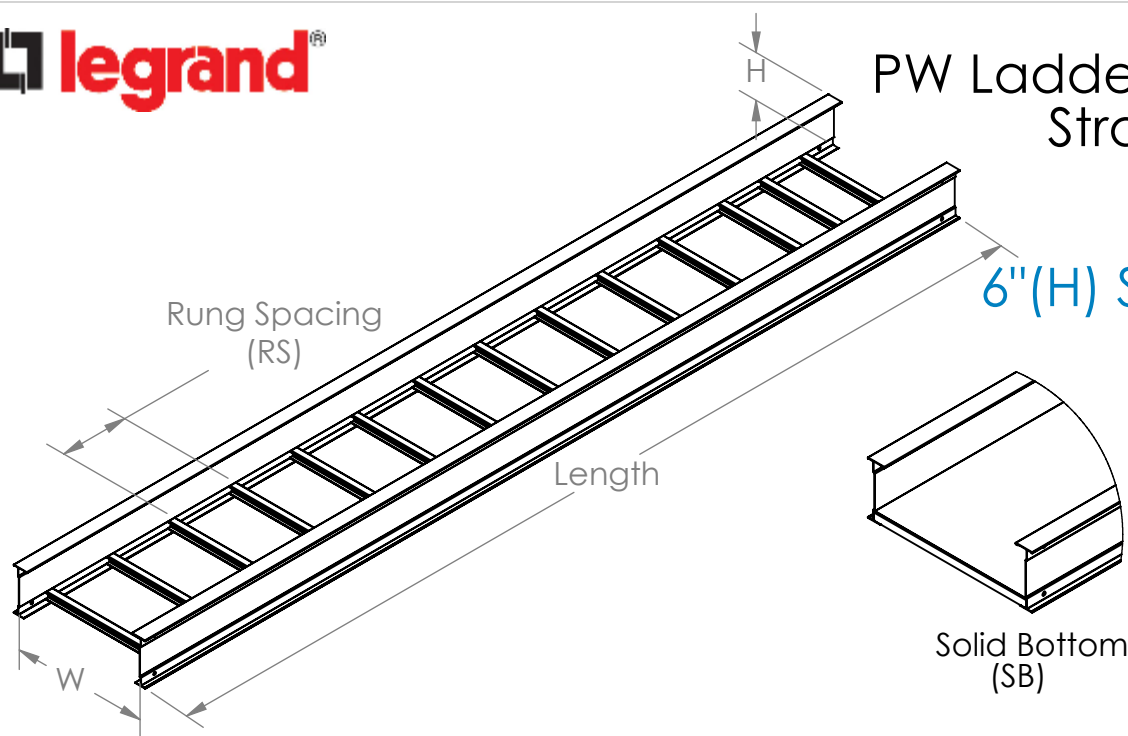

Overall Width: $W + 1.5''$

Tray Width (W)	Tray Weight * (LBS./FT.)
6	2.61
9	2.68
12	2.76
18	2.91
24	3.22
30	3.41
36	3.60

- **Material:** Aluminum Alloy 6063-T6
- **Finish:** Plain
- **Bottom:** Ldr: 1" wide I rung
SB: Flat Sheet over 12" Rung Spacing.
- **Construction:** Welded
- **Tray Design:** Tray construction and markings are per the latest edition of NEMA Standards Publication VE1, CSA C22.2 No. 126.
- **Tray Grounding Capability:** Classified as an equipment grounding conductor per NEC 392.60 with a maximum 2000 ampere rating. UL Cross Sectional area: 2.00 in²
- **Connectors:** Supplied in pairs with hardware. Splice resistance is less than 0.00033 ohms.
- **Mechanical Properties:**
One rail: $I_x - x = 6.380 \text{ in}^4$, $S_x - x = 1.836 \text{ in}^3$

* Based on 9" Rung Spacing

SUPPORT SPAN (FT.)																									
6	8	10	12	14	16	18	20	22	24	26	28	30													
SAFE LOAD DATA (LBS./FT.)/ DEFLECTION (IN.) / SAFETY FACTOR 1.5																									
				410	0.73	308	1.13	227	1.54	173	2.02	137	2.55	111	3.15	90	3.81	74	4.54						

ITRAY STRAIGHT SECTION CATALOG NUMBERING EXAMPLE:

BOTTOM TYPE	←	09-6A	20C-S	240-06	→	WIDTH
VENTED						06-6"
06 - 6" Rung Spacing						09 - 9"
09 - 9" Rung Spacing						12 - 12"
12 - 12" Rung Spacing						18 - 18"
		RAIL HEIGHT		NEMA CLASS		24 - 24"
		6 - 6"				30 - 30"
			MATERIAL			36 - 36"
			A	S144 - 144"		
				S240 - 240"		
				S288 - 288"		
NON-VENTED						
SB - Solid Bottom						



Legrand
8319 State Route 4
Mascoutah, IL 62258 USA
800-658-4641
618-566-3230
Fax 618-566-3250
www.legrand.us/cablofil