






PW Ladder Cable Tray Straight Section

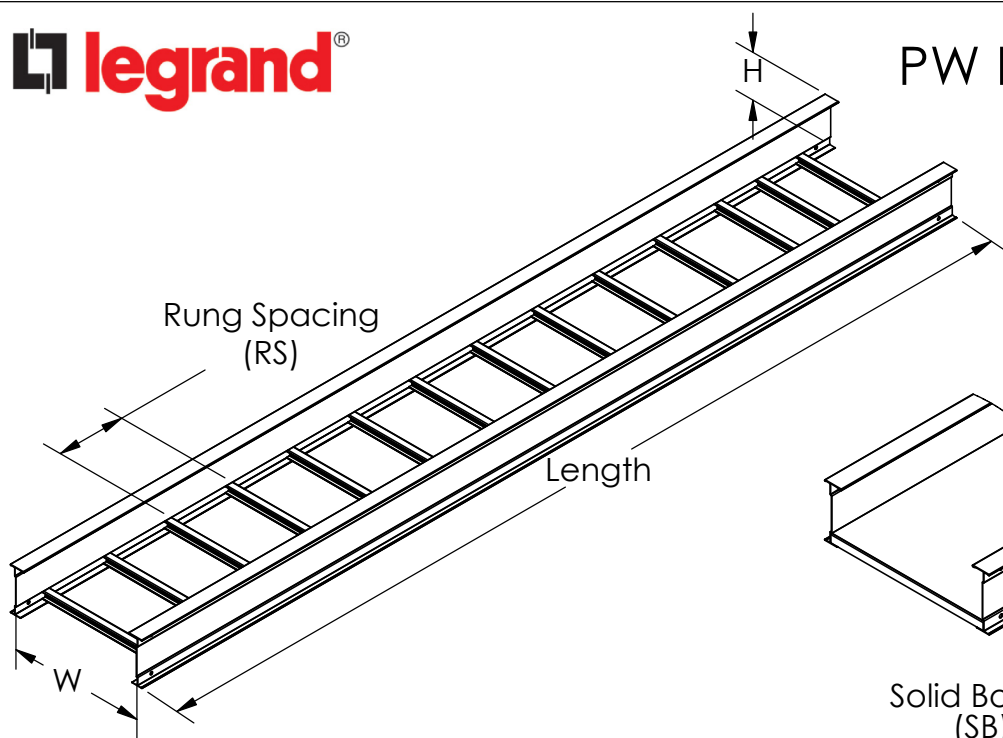

6A12C
6"(H) Side Rail Tray

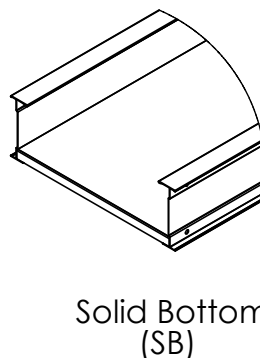

Solid Bottom
(SB)

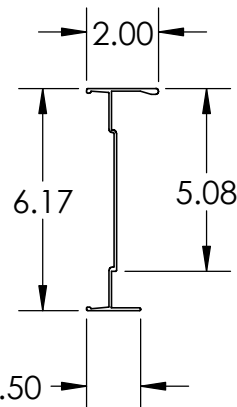

Overall Width: $W + 1.5"$

Tray Width (W)	Tray Weight * (LBS./FT.)
6	1.97
9	2.04
12	2.12
18	2.27
24	2.58
30	2.77
36	2.96

* Based on 9" Rung Spacing

- **Material:** Aluminum Alloy 6063-T6
- **Finish:** Plain
- **Bottom:** Ldr: 1" wide I rung
SB: Flat Sheet over 12" Rung Spacing.
- **Construction:** Welded
- **Tray Design:** Tray construction and markings are per the latest edition of NEMA Standards Publication VE1, CSA C22.2 No. 126.
- **Tray Grounding Capability:** Classified as an equipment grounding conductor per NEC 392.60 with a maximum 1200 ampere rating. UL Cross Sectional area: 1.00 in²
- **Connectors:** Supplied in pairs with hardware. Splice resistance is less than 0.00033 ohms.
- **Mechanical Properties:**
One rail: $I_x-x = 3.993 \text{ in}^4$, $S_x-x = 1.182 \text{ in}^3$

SUPPORT SPAN (FT.)

6	8	10	12	14	16	18	20	22	24	26	28	30
SAFE LOAD DATA (LBS./FT.) / DEFLECTION (IN.) / SAFETY FACTOR 1.5												
410	0.16	394	0.48	252	0.76	175	1.09	124	1.48	92	1.94	

ITRAY STRAIGHT SECTION CATALOG NUMBERING EXAMPLE:

BOTTOM TYPE	09-6	A	12C	S	144	06	WIDTH
VENTED							06-6"
06-6" Rung Spacing							09-9"
09-9" Rung Spacing							12-12"
12-12" Rung Spacing							18-18"
							24-24"
							30-30"
							36-36"
NON-VENTED							
SB - Solid Bottom							
	RAIL HEIGHT		NEMA CLASS		LENGTH*		
	6-6"		A		S120-120"		
					S144-144"		
					S240-240"		



Legrand
8319 State Route 4
Mascoutah, IL 62258 USA
800-658-4641
618-566-3230
Fax 618-566-3250
www.legrand.us/cablofil