
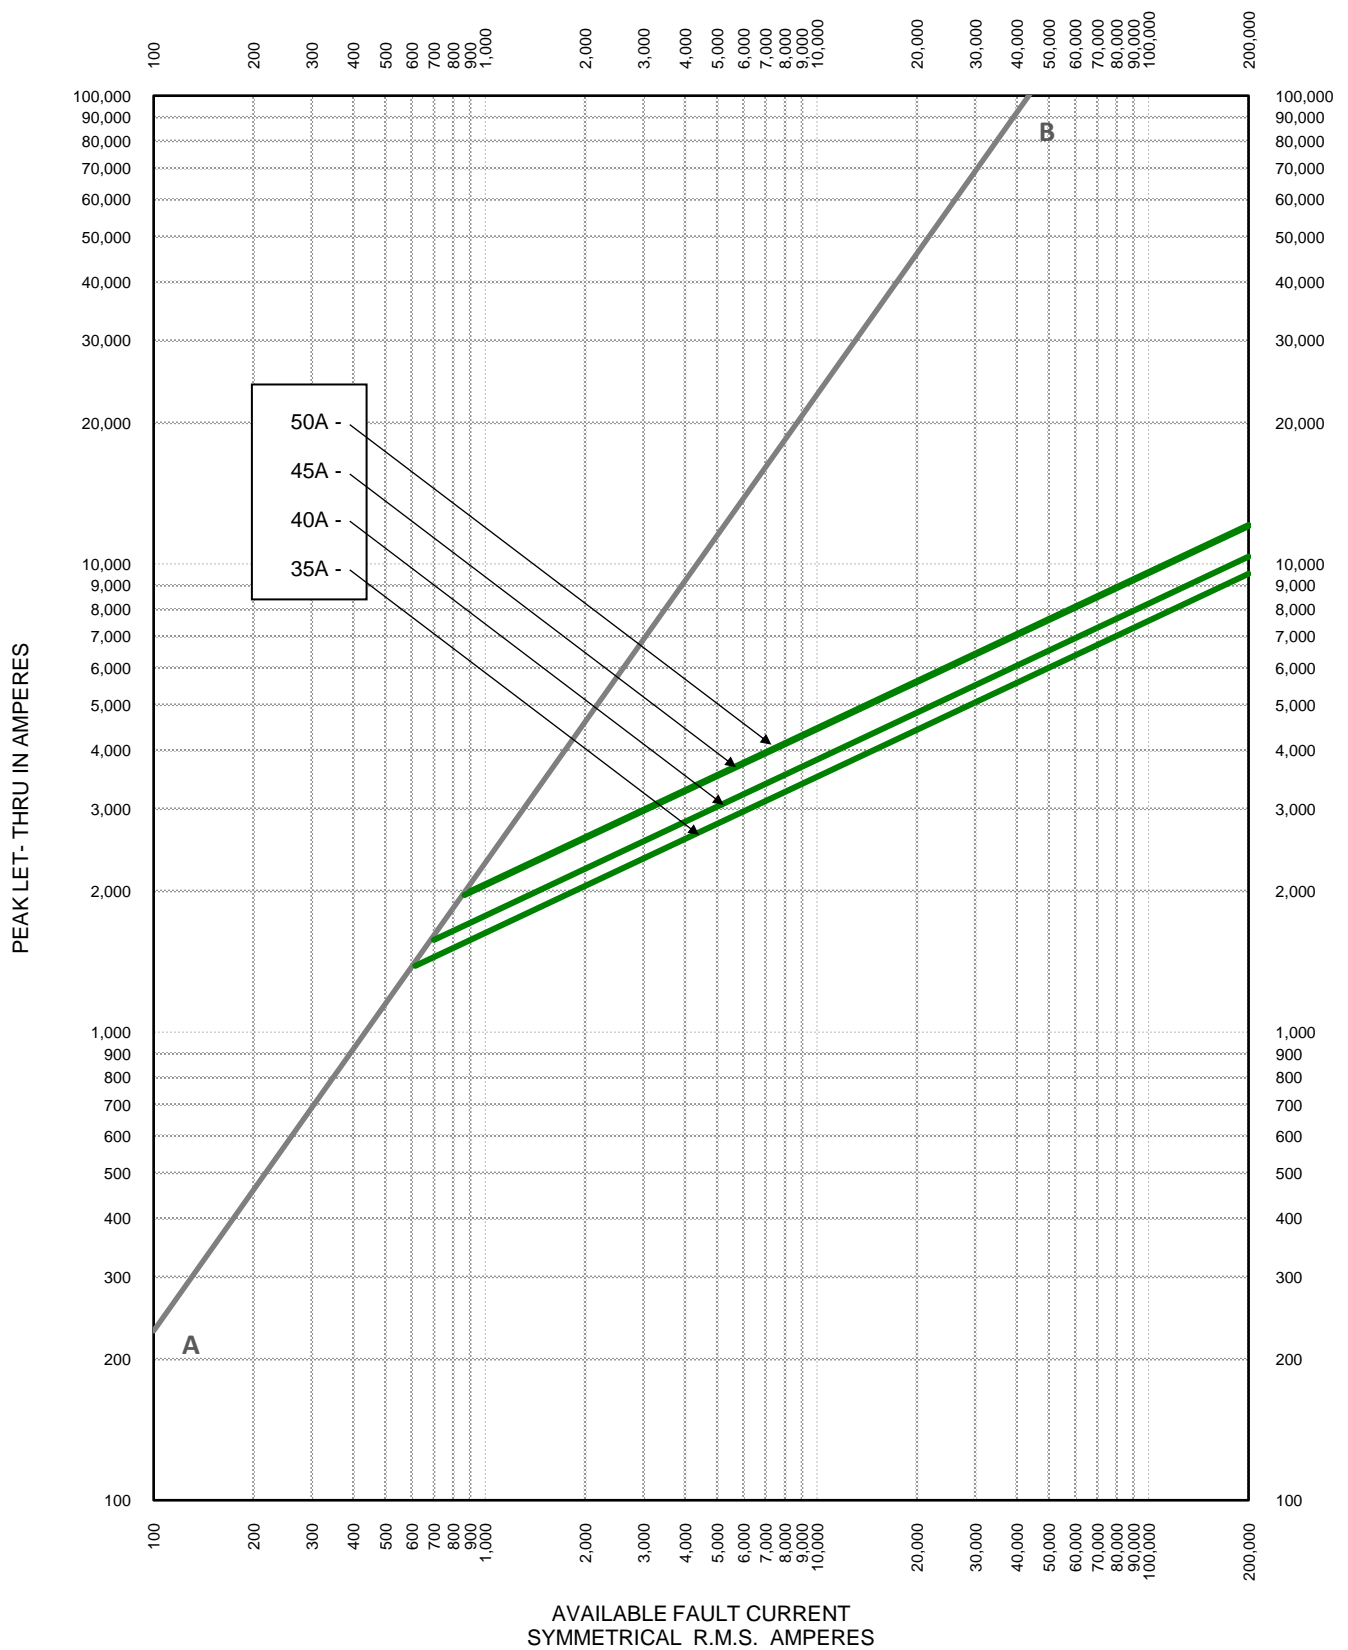

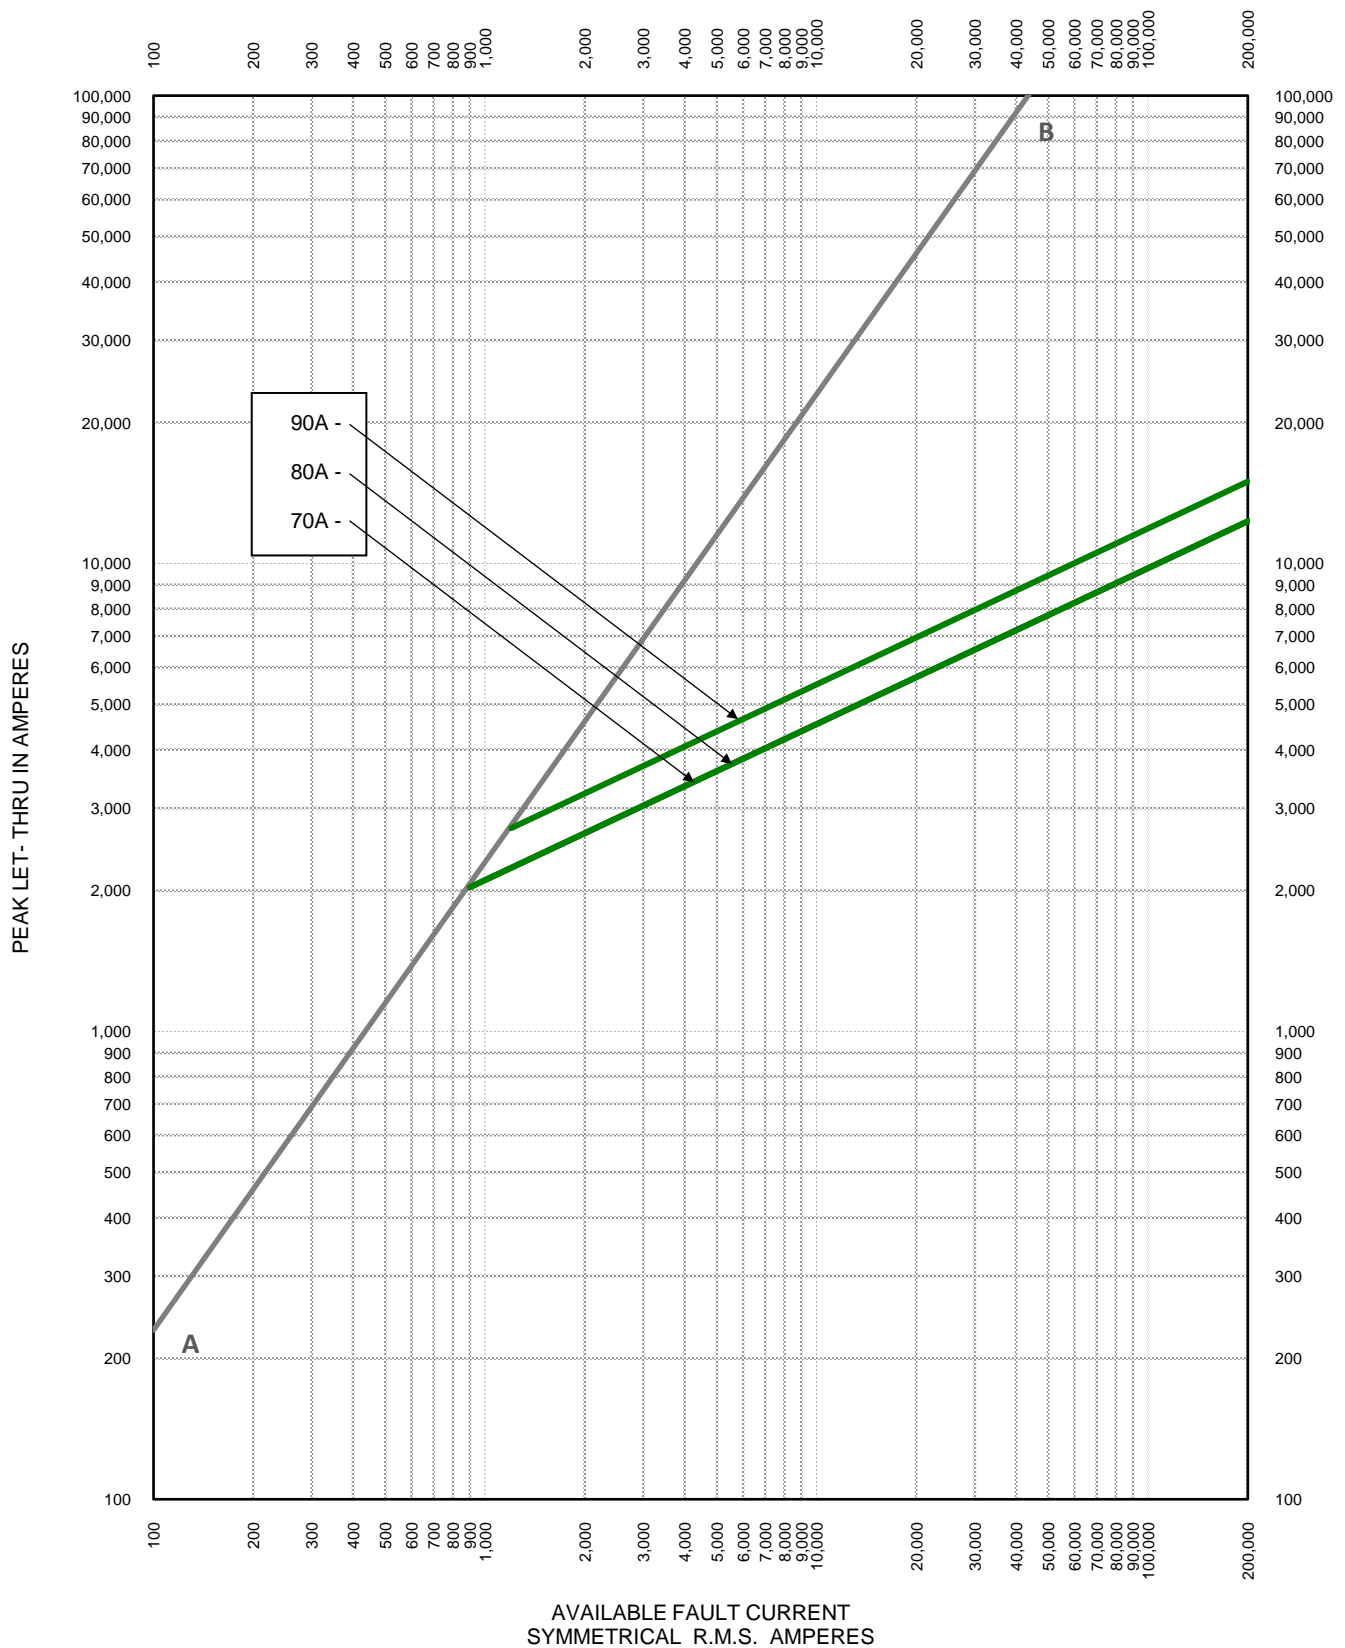



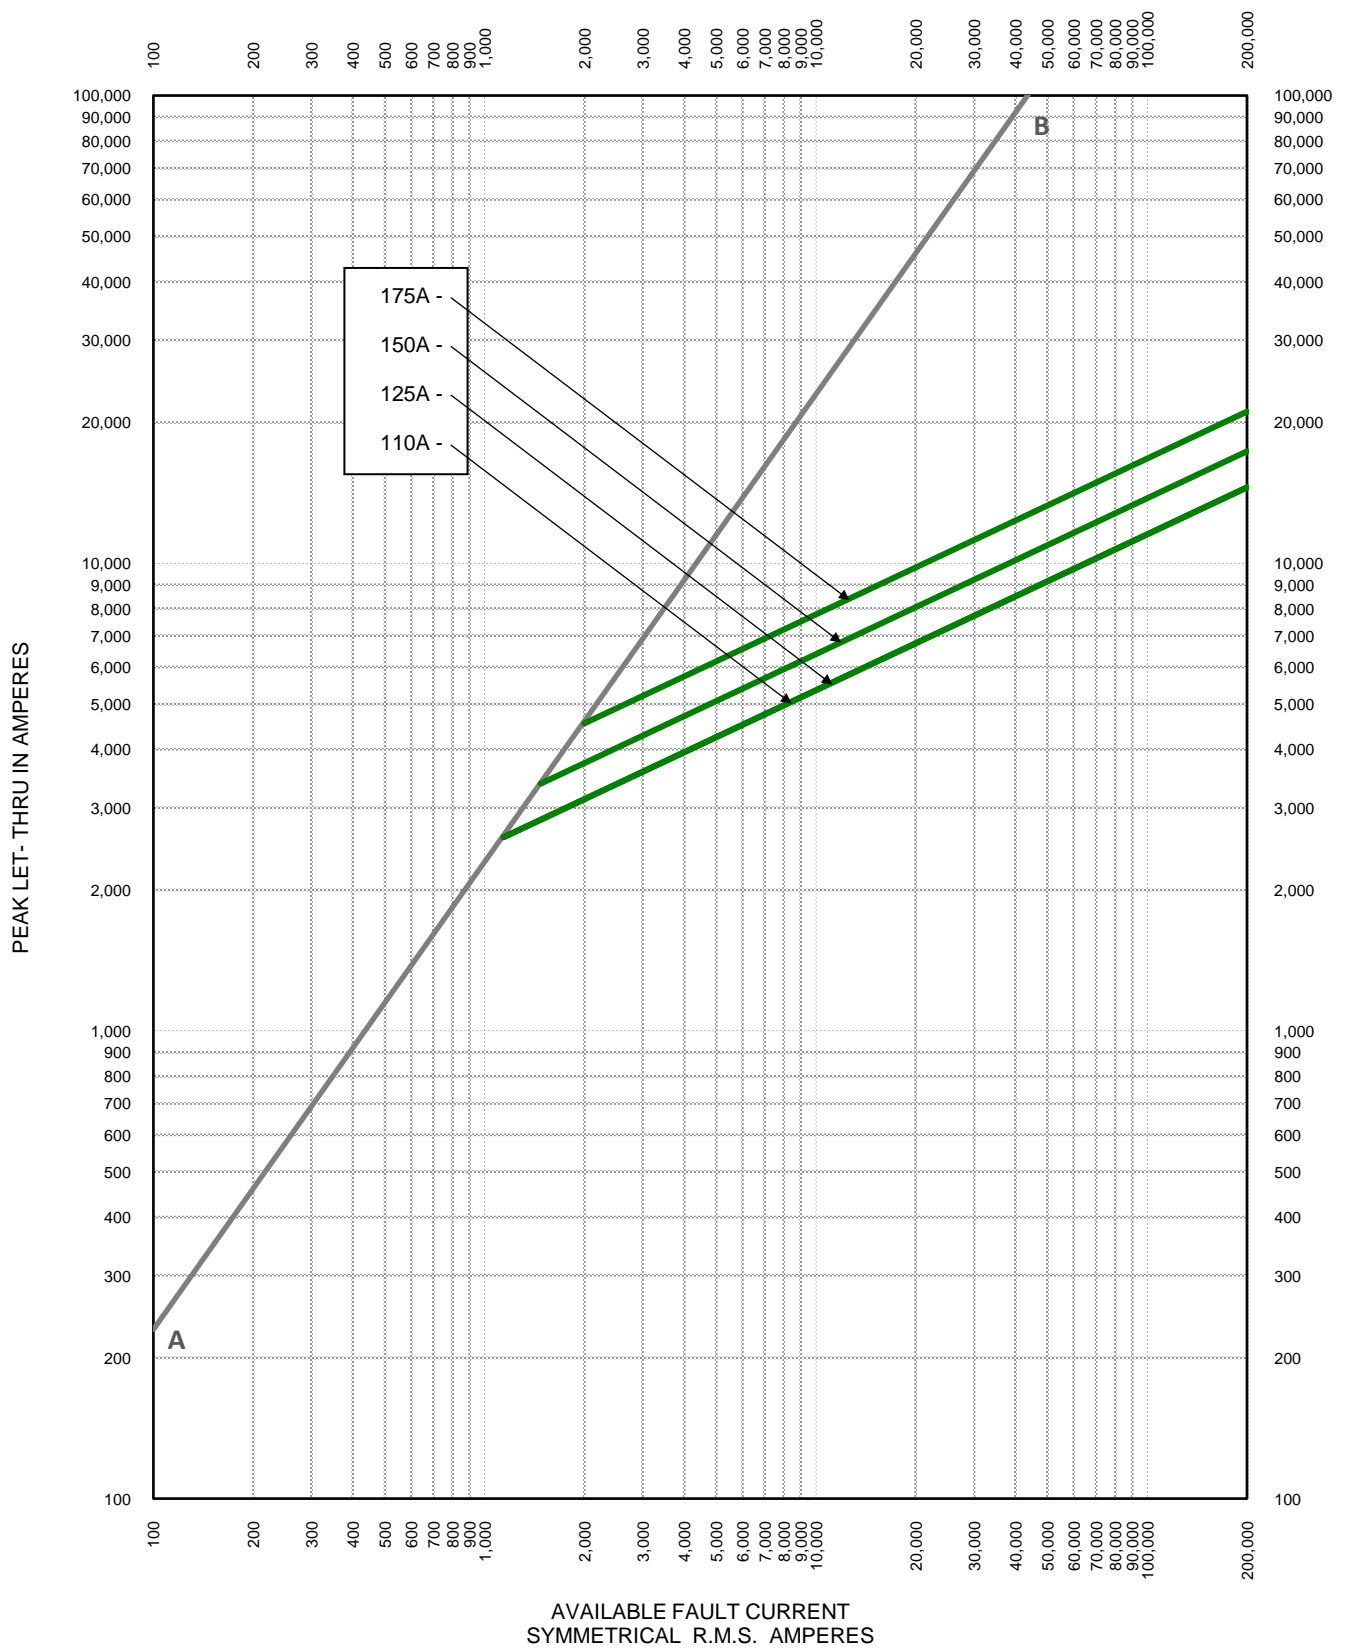
TEST VOLTAGE:	TIME CONSTANT/POWER FACTOR:	FUSE CATALOG NUMBER:
BASIS FOR DATA: AB = 15% Power Factor		JTD & JTDID 30A - 600A
		DRAWN BY: LLL
		DATE: 03/15/2016
PEAK LET-THRU CHARACTERISTIC CURVES		REVISION: C
		DRAWING NO.: SHEET 2 OF 5
FCC05-JTD		




TEST VOLTAGE:	TIME CONSTANT/POWER FACTOR:	FUSE CATALOG NUMBER:
BASIS FOR DATA: AB = 15% Power Factor		JTD & JTDID 35A - 600A
		DRAWN BY: LLL
		DATE: 03/15/2016
PEAK LET-THRU CHARACTERISTIC CURVES		REVISION: C
		DRAWING NO.: SHEET 3 OF 5
FCC05-JTD		



TEST VOLTAGE:	TIME CONSTANT/POWER FACTOR:	FUSE CATALOG NUMBER:
BASIS FOR DATA: AB = 15% Power Factor		JTD & JTDID 35A - 600A
		DRAWN BY: LLL
		DATE: 03/15/2016
PEAK LET-THRU CHARACTERISTIC CURVES		REVISION: C
		DRAWING NO.: SHEET 4 OF 5
		FCC05-JTD



TEST VOLTAGE:	TIME CONSTANT/POWER FACTOR:	FUSE CATALOG NUMBER:
BASIS FOR DATA: AB = 15% Power Factor		JTD & JTDID 30A - 600A
		DRAWN BY: LLL
		DATE: 03/15/2016
PEAK LET-THRU CHARACTERISTIC CURVES		REVISION: C
		DRAWING NO.: SHEET 5 OF 5
		FCC05-JTD