

## SPECIFICATION SHEET

### C SERIES COMMERCIAL STYLE SPRINGWOUND AUTO OFF IN-WALL TIMER

#### APPLICATIONS

- Ventilating fans.
- HVAC.
- Whirlpools.
- Motors and pumps.

#### FEATURES

##### VARIABLE TIMING:

Twist knob for time ON setting. Time ON lengths from 15 minutes to 12 hour vary by model.

##### HOLD FEATURE:

Some models have position for constant ON.

##### EASY SET:

No adjustments. Just wire and go!

##### EASY WIRING:

No neutral required. Great for retrofit!

##### SWITCH TYPE:

SPDT "2 in 1" contacts wire as SPST also, except C460M and C412H are DPST.

##### COLOR:

Metal-brushed aluminum.

##### WALL PLATE:

Includes real metal wall plate with screw mounting, to add extra security for commercial applications.

#### SPECIFICATIONS

##### INPUT VOLTAGE:

125/250/277VAC, 50/60Hz.

##### TERMINAL SIZE:

#12AWG.

##### OPERATING TEMPERATURE:

32 °F to 122 °F (0 °C to 50 °C).




\*Wallplate included

#### WIRING DIAGRAMS


##### USE FOR SPST



##### USE FOR SPDT



##### USE FOR DPST




#### ORDERING INFO

CAT. NO.	UPC CODE	HOLD FEATURE
<b>15 MINUTE MAX.</b>		
<b>C515M</b>	15501	No Hold
<b>30 MINUTE MAX.</b>		
<b>C530M</b>	15503	No Hold
<b>60 MINUTE MAX.</b>		
<b>C560M</b>	15505	No Hold
<b>C560MH</b>	15506	With Hold
<b>C460M*</b>	15011	No Hold
<b>2 HOUR MAX.</b>		
<b>C502H</b>	15507	No Hold
<b>6 HOUR MAX.</b>		
<b>C506H</b>	15511	No Hold
<b>12 HOUR MAX.</b>		
<b>C512H</b>	15513	No Hold
<b>C512HH</b>	15514	With Hold
<b>C412H*</b>	15010	No Hold

#### CONTACT RATINGS

TYPE	VOLTAGE (VAC)	RATING
Resistive	125	20A
	250	10A
	277	10A
Inductive	125	20A
	250	10A
	277	10A
Tungsten	125	7A
Motor	125	1HP
	250	2HP

\*DPST switch type.

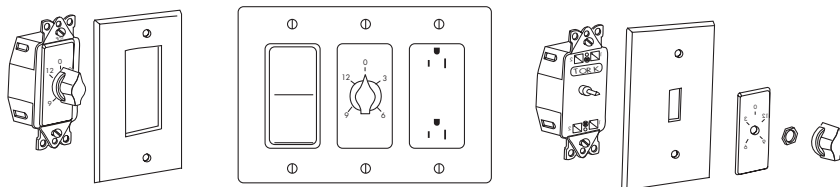

**CAUTION:** This timer is not to be used in precision timing applications where inaccurate timing could have dangerous consequences (i.e. sun lamp, sauna, etc.).