

LED LIGHTING

Small Wallpack LED with Photocontrol

Lower Wattage & Higher Output

WP13LEDPC



SPECIFICATIONS


- cULus Listed for wet locations.
- Energy Savings Solutions.
- RoHS Compliant.

WARRANTY

- 5-year Limited.
- See website for details. www.nsiindustries.com

FEATURES



- Die cast aluminum back plate with polycarbonate housing.
- Architectural bronze finish.
- Quick mount installation.
- Color temperature - 4700K.
- High impact-resistant lens with built-in photocontrol.

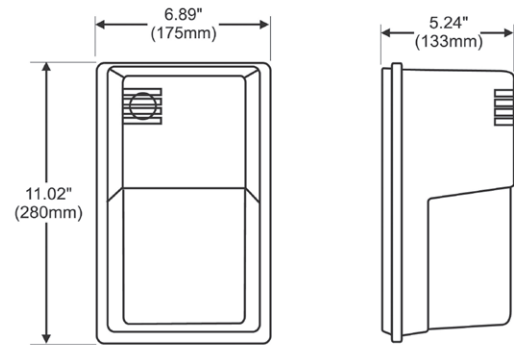

CAT. NO.	SYSTEM WATTS	LUMEN OUTPUT	COLOR	LM/W	INPUT VOLTAGE	COLOR RENDERING INDEX (CRI)	STARTING TEMP.	EQUIVALENT
WP13LEDPC	12.6	615LM**	4700K	49	120VAC	70+	-40 °C	50W - 70W MH

**DISCLAIMER: this test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture.

PHOTOMETRIC REPORTS

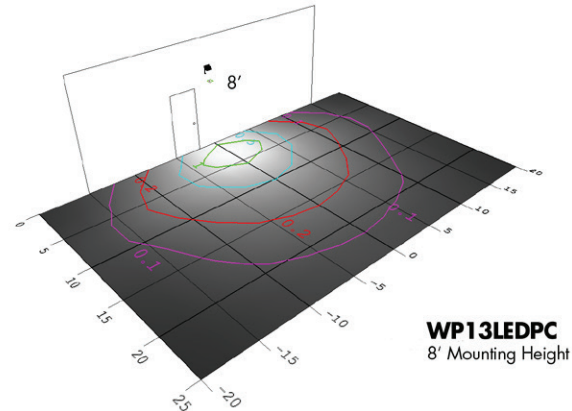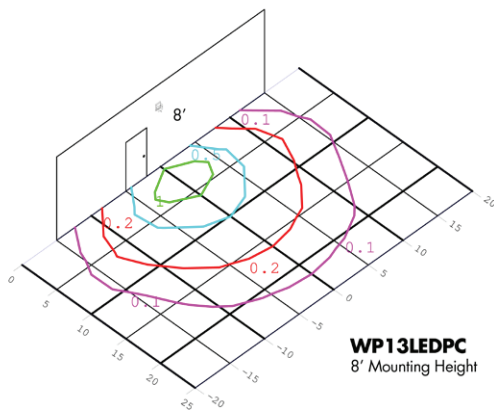

Scan QR code for
mobile access to
LED spec sheets