

CONNECTORS

Mechanical Connectors

Aluminum, Dual Rated, Heavy Duty Transformer Lugs

LL Series





SPECIFICATIONS

- Meets or exceeds ANSI C119.4 Class A, AL9CU
- Temperature Rating: 90 °C, AL9CU.
- Voltage: 600V max.

FEATURES

- Versatile and reusable set-screw connectors made from high strength 6061-T6 aluminum alloy for superior electrical and mechanical performance.
- Two set-screws per wire hole ensure an exceptional connection.
- Electro-tin plated for low contact resistance.
- For use with copper or aluminum conductors.
- Mounting hole spacing is NEMA 1 3/4" spacing.

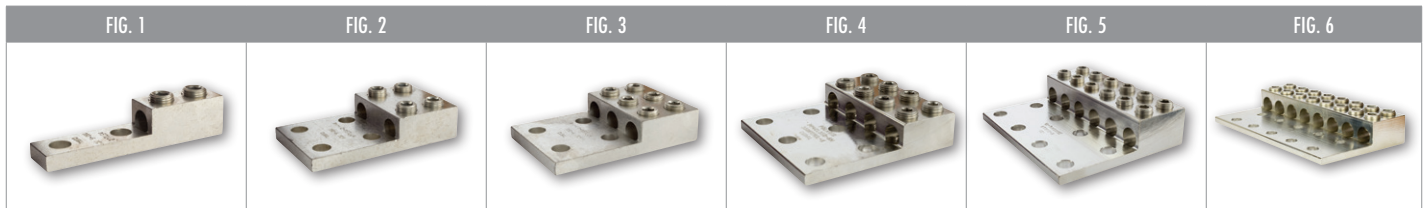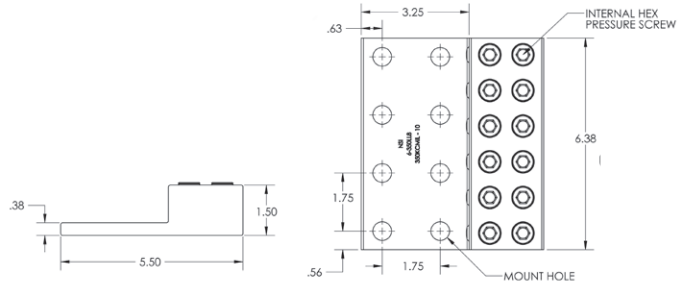

CAT. NO.	FIG. NO.	WIRE RANGE	MAX TORQUE VALUE (IN./LBS.)	NO. OF CONDUCTORS	NO. OF MTG. HOLES	MTG. HOLE DIA. (IN.)	MTG. HOLE SPACING (IN.)	HEX WRENCH SIZE (IN.)	BOLT SIZE (IN.)	LENGTH (L) (IN.)	WIDTH (W) (IN.)	HEIGHT (H) (IN.)	STD. CTN. QTY.
350LL2	1	350 MCM-6 AWG	400	1	2	0.563	1.750	3/8	1/2	5.310	1.130	1.380	1
2-350LL4	2	350 MCM-6 AWG	400	2	4	0.563	1.750	3/8	1/2	5.310	2.000	1.380	1
3-350LL4	3	350 MCM-6 AWG	400	3	4	0.563	1.750	3/8	1/2	5.310	2.940	1.380	1
4-350LL6	4	350 MCM-6 AWG	400	4	6	0.563	1.750	3/8	1/2	5.310	3.870	1.380	1
6-350LL8	5	350 MCM-6 AWG	400	6	8	0.563	1.750	3/8	1/2	5.310	5.750	1.380	1
8-350LL8	6	350 MCM-6 AWG	400	8	8	0.563	1.750	3/8	1/2	5.310	7.620	1.380	1
8-350LL10	6	350 MCM-6 AWG	400	8	10	0.563	1.750	3/8	1/2	5.310	7.620	1.380	1
2-600LL4	2	600 MCM-2 AWG	550	2	4	0.563	1.750	3/8	1/2	5.875	2.410	1.562	1
4-600LL6	4	600 MCM-2 AWG	550	4	6	0.563	1.750	3/8	1/2	5.875	4.780	1.562	1
6-600LL6	6	600 MCM-2 AWG	550	6	6	0.563	1.750	3/8	1/2	8.750	5.750	1.750	1
2-800LL4	2	800-300 MCM	550	2	4	0.563	1.750	1/2	1/2	6.188	2.737	1.875	1
4-800LL8	4	800-300 MCM	550	4	8	0.563	1.750	1/2	1/2	6.188	5.487	1.875	1
2-1000LL4	2	800-300 MCM	550	2	4	0.563	1.750	1/2	1/2	6.188	2.982	1.875	1
4-1000LL8	4	1000-500 MCM	600	4	8	0.563	1.750	1/2	1/2	6.188	5.982	1.875	1
8-1000LL12	6	1000-500 MCM	600	8	12	0.563	1.750	1/2	1/2	6.188	11.982	1.875	1