

DESCRIPTION

- Remotely mounted fan reduces noise in occupied areas.
- Use with adjustable inlet grilles to control flow for any situation.
- Remote mounting provides flexibility in system design.
- High quality external rotor motor features long life, efficiency and quiet operation.
- Easy mounting to rafters or joist.
- Backward inclined centrifugal fan for strong air delivery with minimal noise.

DESIGN FEATURES

Air Delivery: Model ILF120: 110 cfm (52 L/s) at 0.2" Ps
Model ILF130: 120 cfm (61 L/s) at 0.2" Ps
Model ILF250: 230 cfm (118 L/s) at 0.2" Ps

Sound Level: N/A - unit is remotely mounted

Housing: Durable polycarbonate plastic

Motor: External rotor, ball bearing, 115 VAC, 60Hz

Blower Wheel: Backward inclined centrifugal

Duct Size: Model ILF120: 4" (102 mm) diameter
Model ILF130: 5" (127 mm) diameter
Model ILF250: 6" (152 mm) diameter

INSTALLATION



- Not for use in cooking areas.
- Not for use in wet locations.
- Suitable for use over a tub or shower when connected to a GFCI-protected branch circuit.
- Suitable for use with solid state speed controls.
- Housing mounts directly to bracket. Bracket mounts to rafter or joist.
- Complete installation instructions included with each unit.
- Switches and accessories available separately.

ARCHITECT'S SPECIFICATIONS

Exhaust Fan shall be Model ILF120, ILF130 or ILF250 as manufactured by NuTone according to listed specifications.

In-Line Fans


MODELS ILF120, ILF130, ILF250

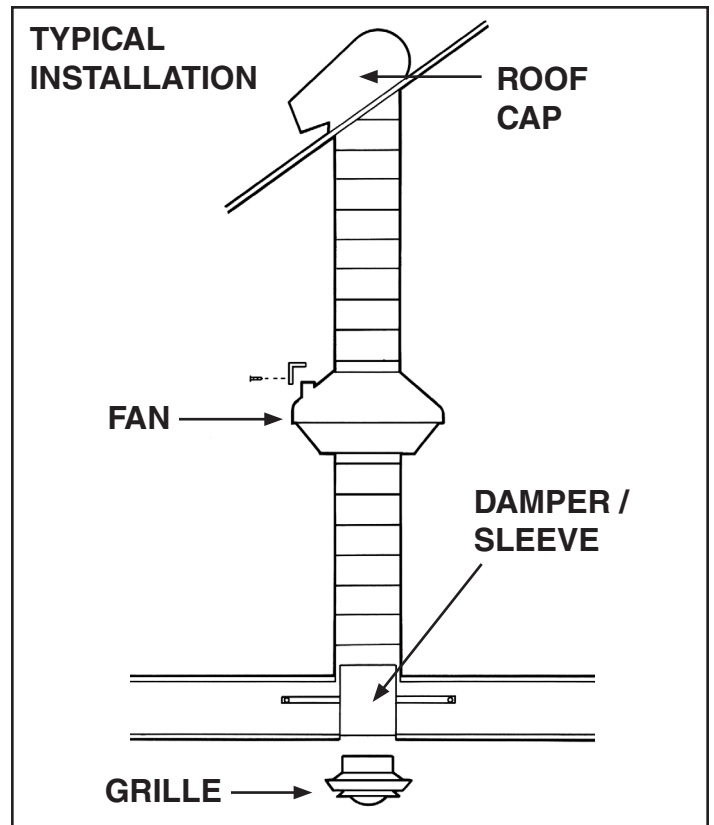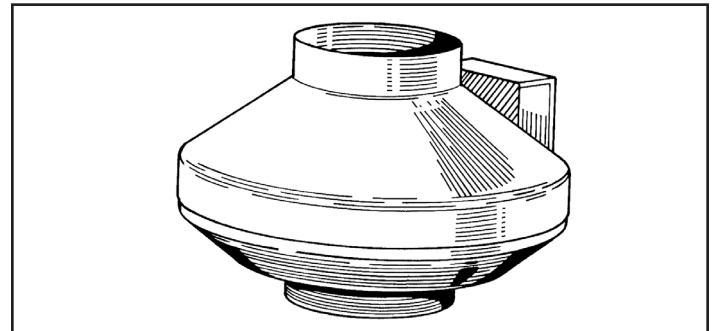

Broan-NuTone LLC Hartford, Wisconsin www.nutone.com 888-336-3948
Broan-NuTone Canada, Inc. Mississauga, Ontario www.nutone.ca 877-896-1119

REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by Date


AIR PERFORMANCE CURVE MODEL ILF120

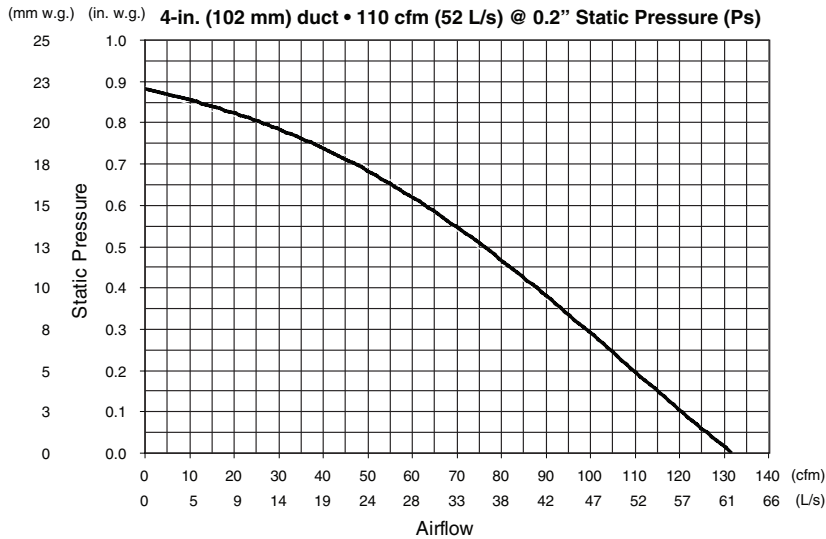

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.2 in. static pressure, based on tests conducted in a state-of-the-art test laboratory.



AIR PERFORMANCE CURVE MODEL ILF130

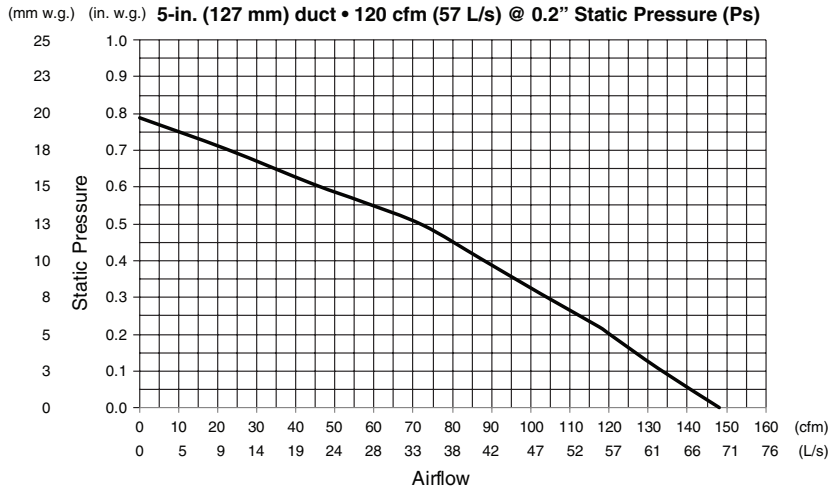

AMPS

Model	Amps
ILF120	0.2
ILF130	0.2
ILF250	0.6

WATTS

Model	Watts
ILF120	46.0
ILF130	43.0
ILF250	84.0

AIR PERFORMANCE CURVE MODEL ILF250

