



CT-901RCH

PA24483A01
Rev. 01 8-2007

REMOTE CONTROL HANDLE FOR THE CT-901HP HYDRAULIC PUMP INSTALLATION INSTRUCTIONS


© Panduit Corp. 2007

1. Unplug the Hydraulic Pump power cord from the electrical receptacle.
2. Remove the upper (orange) cover from the CT-901HP Hydraulic Pump by removing the four (4) socket head cap screws and washers. Set the upper cover and fasteners aside.
3. Disconnect any current controller from the hydraulic pump by disconnecting the controller cable wires from the hydraulic pump. The controller cable is easily disconnected by unplugging the bullet-type disconnects. Make a note of the cable wires connections (color-coding) in the event that the controller would be re-installed.
4. Connect the CT-901RCH Remote Control Handle to the Hydraulic Pump by connecting the remote control handle cable, following the wiring diagram below. Replace cover.

Step 1: Connect the **Black** on Remote Control Handle to the **Black** on Pump.

Step 2: Connect the **Green** on Remote Control Handle to **Red** on Pump.

Step 3: Connect the **White** on Remote Control Handle to **White** on Pump.

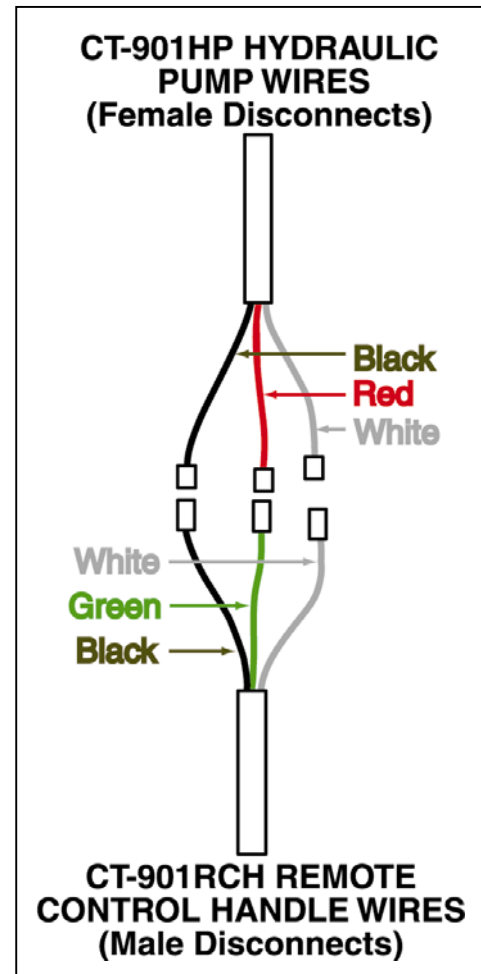

Website: www.panduit.com
Email: cs@panduit.com



For Technical Support:
888-506-5400, ext. 3255
Fax: (630) 759-7532