


Component Weight and Temperature Compatibility




DIN Rail Wiring Duct is designed for use up to but not exceeding the UL recognized continuous use temperature, **50°C (122°F)**. Prolonged exposure to higher temperatures is not recommended and can damage product.

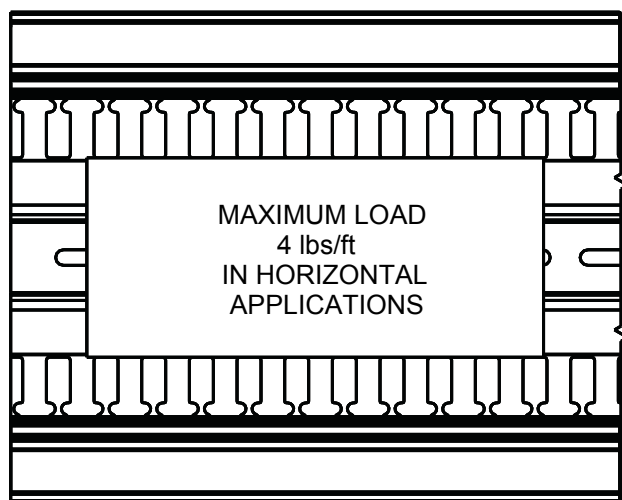


Do not mount heat-generating components such as drives or power supplies to DIN Rail Wiring Duct.

Component Width Compatibility

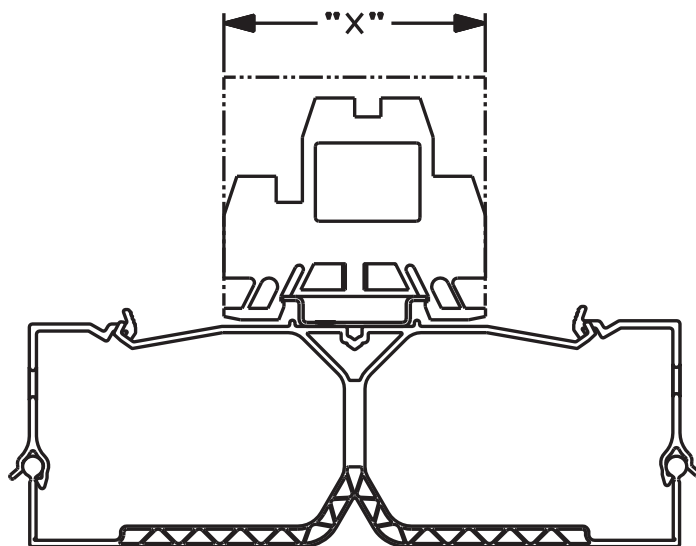


DIN Rail Wiring Duct	Recommended Maximum Component Width "X"
DRD22**6	2 5/8"
DRD33**6	2 5/8"
DRD44**6	3 5/8"



Component use within recommended maximum width ensures top wire slots are fully accessible.

DIN Rail Wiring Duct Installation and Fastener Spacing


NR1-C
(Sold Separately)



Optional: User Supplied
#10-32x1/2" (or sheet
metal screw equivalent)

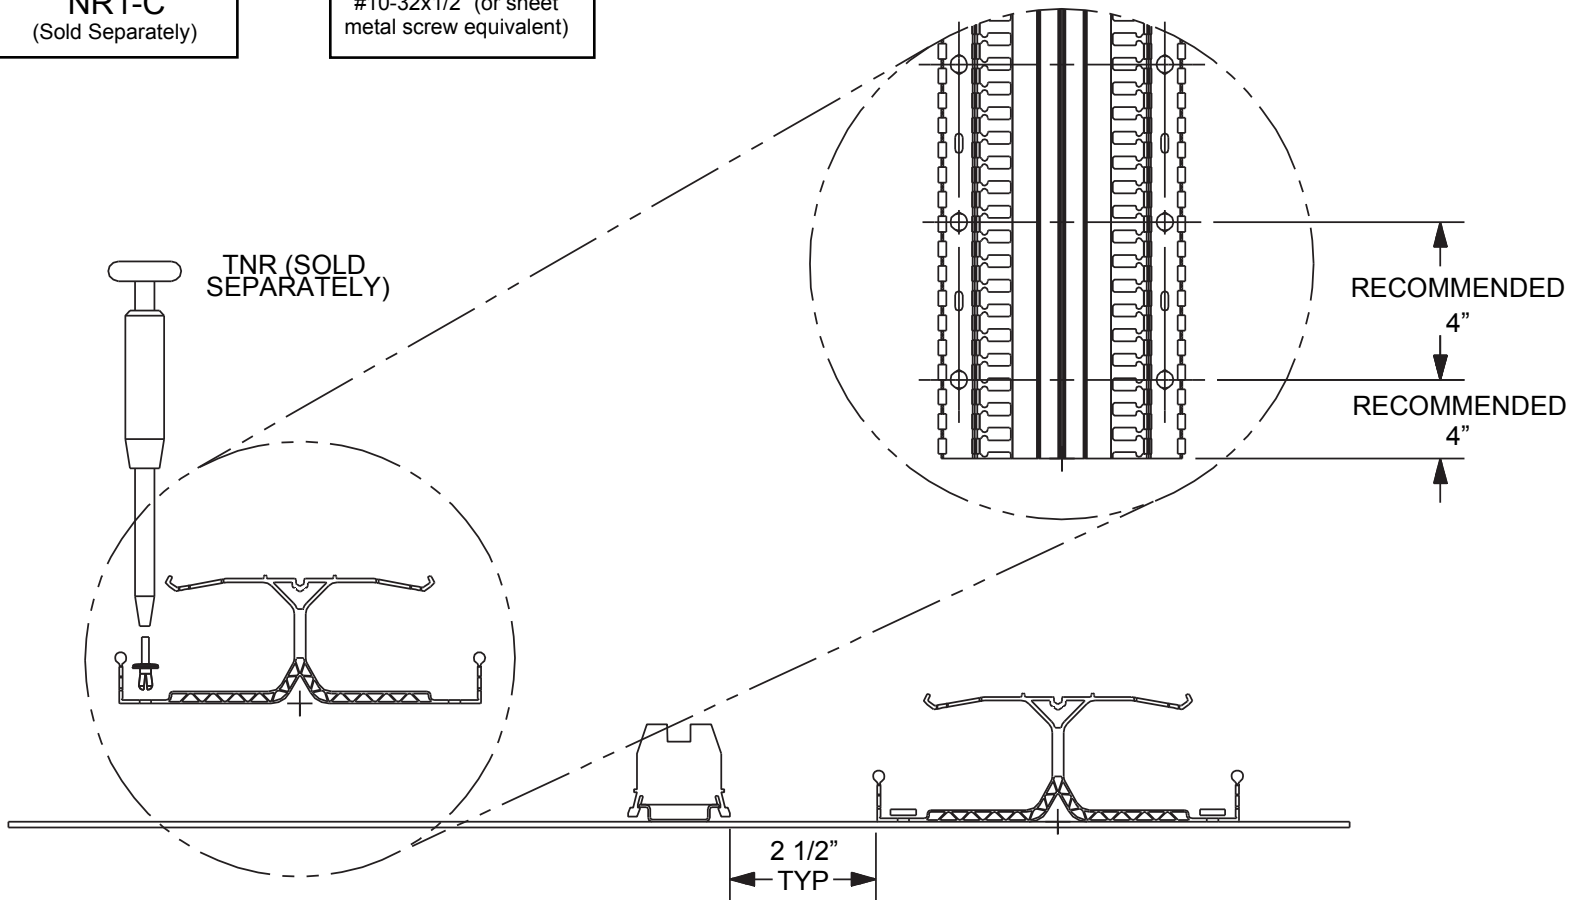**Cover Installation, Operation, and Removal**


DRDC6**
(supplied with base)

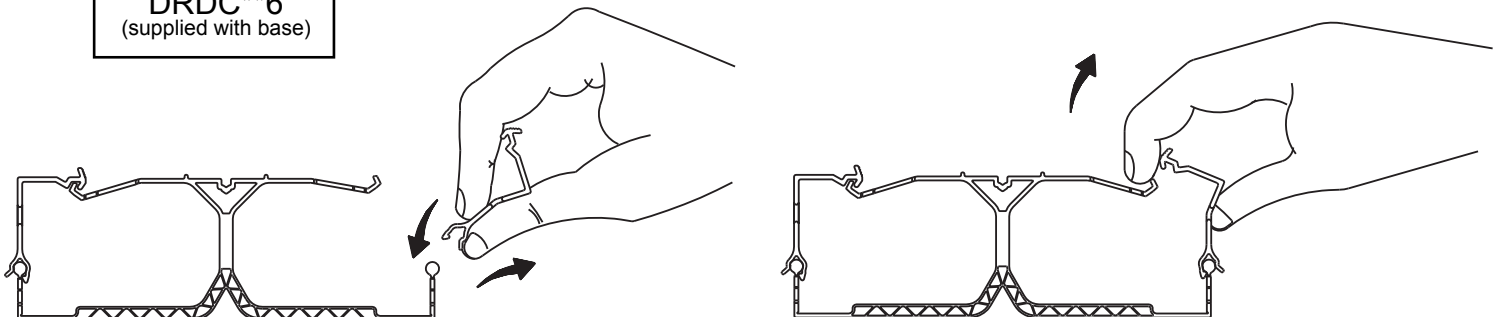

Installing Rail to DIN Rail Wiring Duct



DRDSF
#10-16 x 5/8"
self-drilling fastener
(supplied with base)




User supplied
35x7.5mm or 15mm *
DIN rail


* 15mm DIN rail must be installed with #8-18 x 5/8" self-drilling fastener, not included.

2" RECOMMENDED →


8" RECOMMENDED

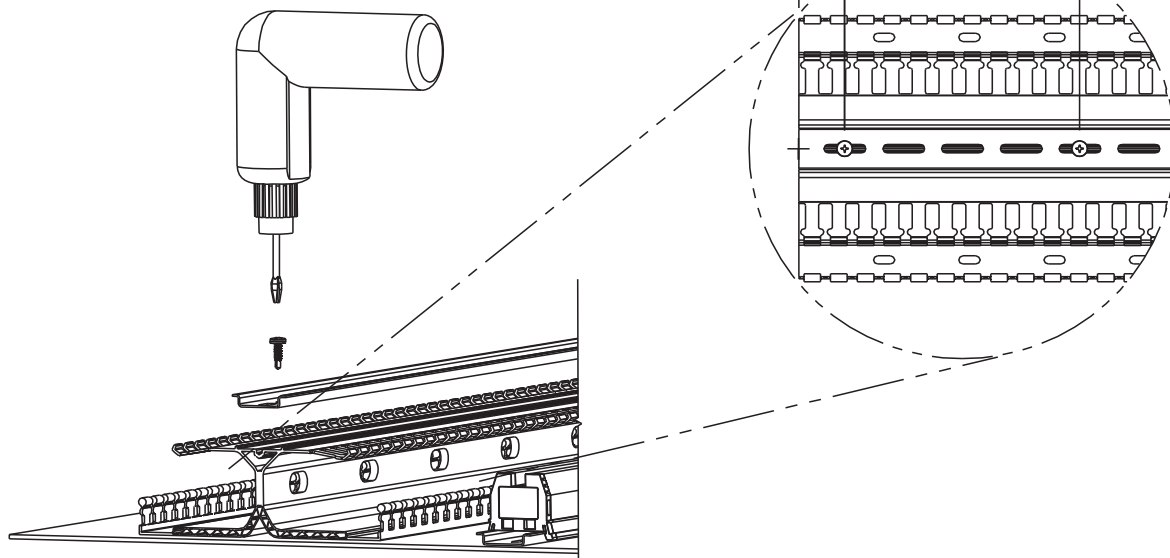







Optional Wire Retainer





DRDWR
(optional)

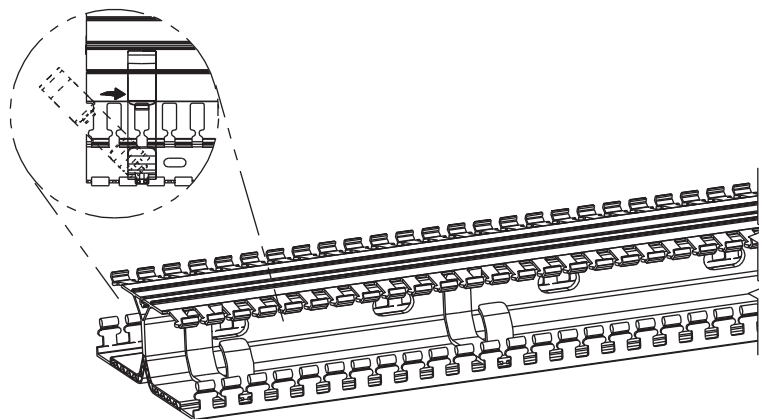

Transitions to Conventional Wiring Duct and Optional Corner Strip

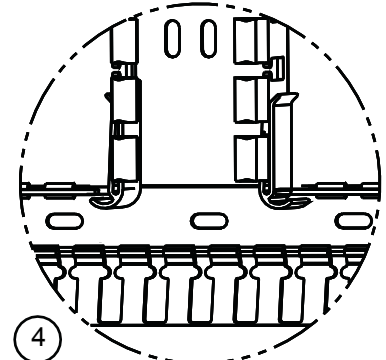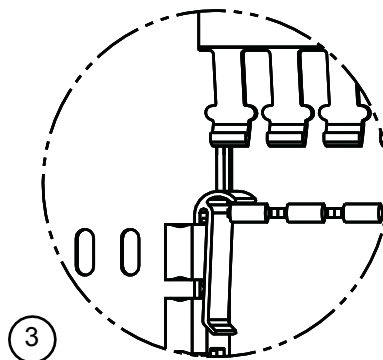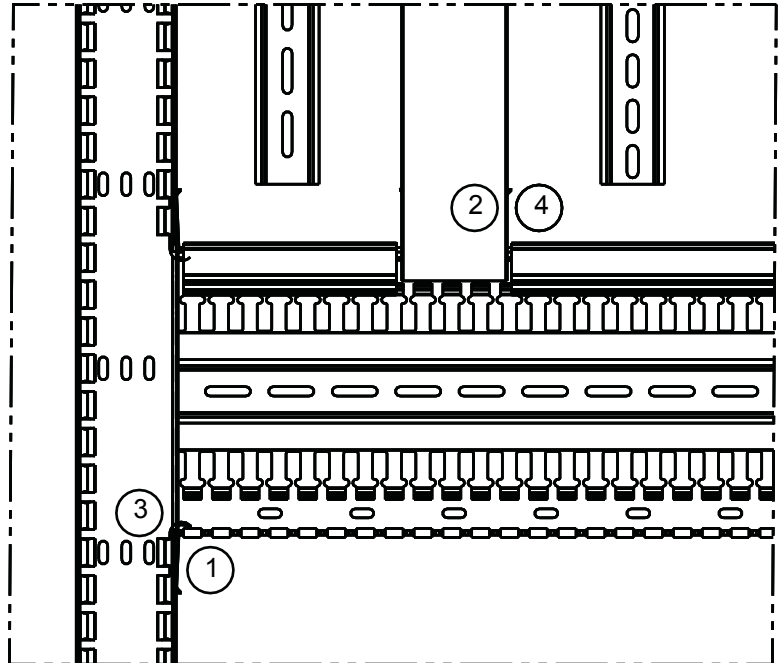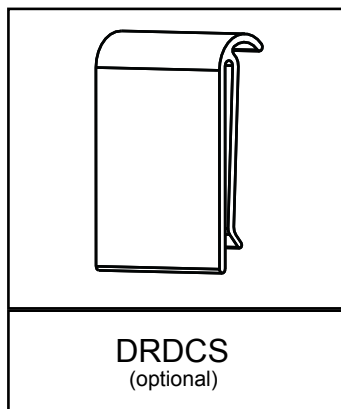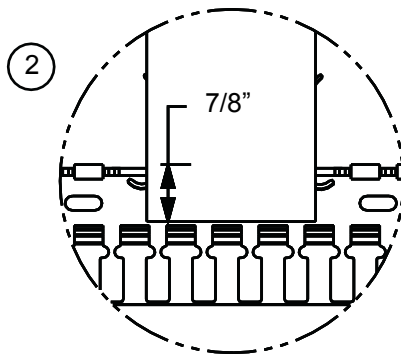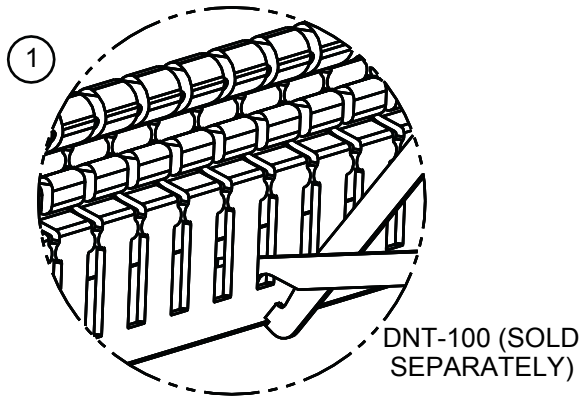

Utilizing Pass Through Holes to Shorten Wiring Path

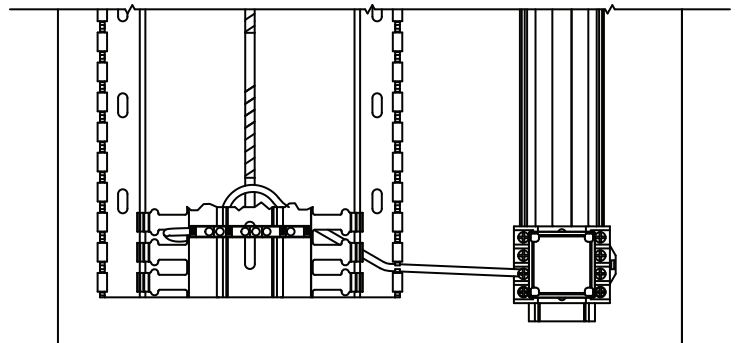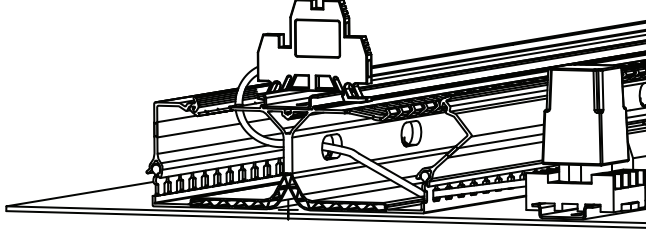

For Instructions in Local Languages
and Technical Support:

www.panduit.com/resources/install_maintain.asp

PANDUIT
www.panduit.com

E-mail:
techsupport@panduit.com

Fax:
866-405-6654