

Quick Start Reference

Part Number >> PES197 >> Setup and Operation

- 1- Place the PES197 embosser and accessory bag on the table.
- 2- Check the contents of accessory bag in accordance with the operation manual.
- 3- If using USB cable, install the program (disc) included with the cable.

- 4- Follow prompts to load software. Select 26886 – USB to serial DB9 adapter.
 - 5- Select installation for Windows 98, ME, 2000, XP or Vista.
- NOTE: Windows 7 needs to be downloaded from "Cables to Go" disc.

EMBOSSER SET-UP



1



2



3




4



5

- 6- Click on NEXT.
- 7- Click on FINISH.
- 8- Follow instructions to update COM PORT assignment.


- 9- Install EZ Mark software. Click on the desired language then enter serial number and click OK.
- 10- Click NEXT.

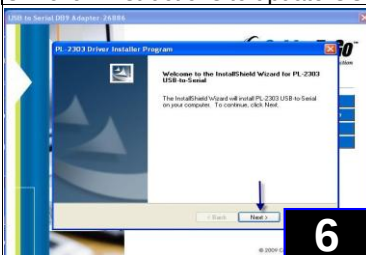


6




7

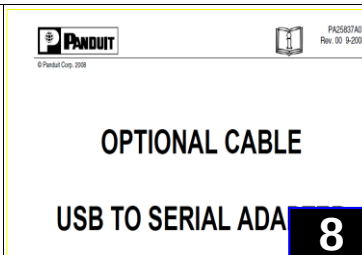

8

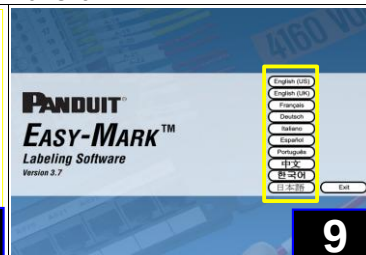


9

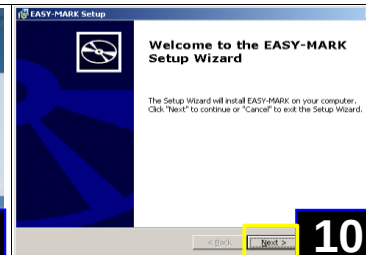


10

- 11- Click on the "I accept" button and click NEXT.
- 12- Choose program location and hit NEXT.
- 13- Click INSTALL for program to begin loading files.


- 14- Click FINISH.
- 15- Open EZ Mark software. 16- Add to FAVORITES. Select Format, ADD, then OK. This format will now be in your FAVORITES.

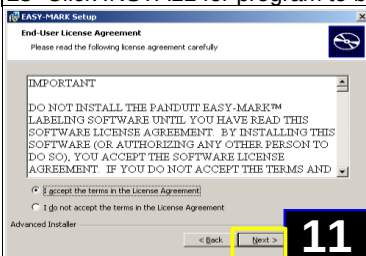


11

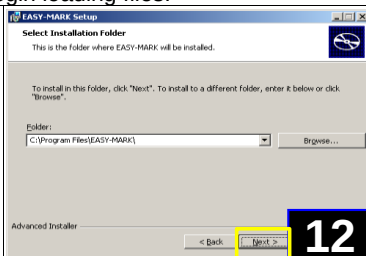

12

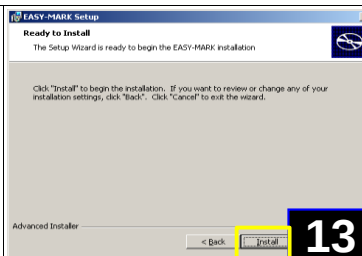


13

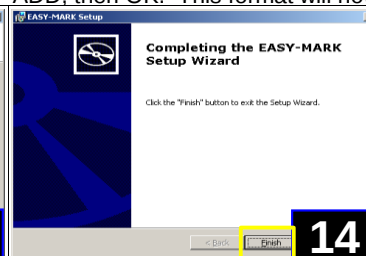

14



15

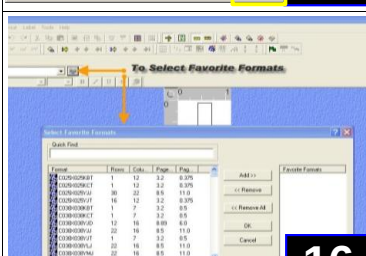

16



Equipment Needed:
PES197 EMBOSSER
Application CD & Manual
POWER SUPPLY CABLE
SERIAL CABLE
OPERATION MANUAL

Tools Needed:
Phillips screwdriver
Box cutter

Safety Equipment

Glasses

Quick Start Reference

Part Number >> PES197 >> Setup and Operation


17- Plug in the power supply and serial port cable located in the back of the machine.

18- Open the guard shield.

19- Adjust the hopper. Install the proper sizing block into hopper for desired marker plate.

20- Tighten the thumb screws on both sides of the hopper by turning in opposite direction on each side. LEFT- toward back, RIGHT- toward front.


21- Remove the sizing block from the hopper.

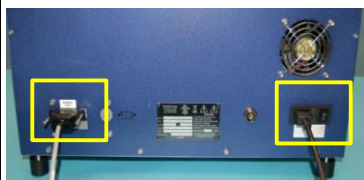


17




18

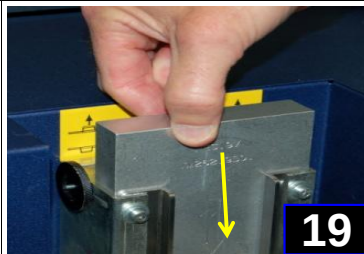

19

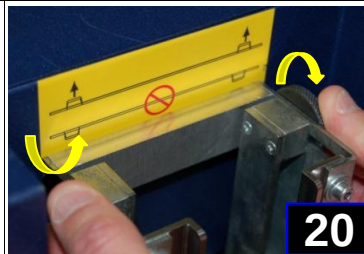

20

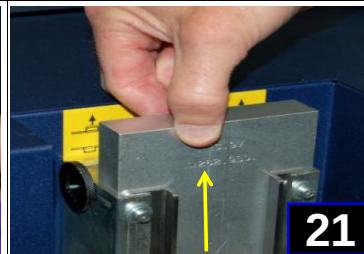

21


22- Place the marker plates into the hopper with the EZ hump (see illustration) facing upward.

23- Place the proper size weight for the marker plates to be embossed.


24- Attach external hopper with insert to the side of the machine.

25- Install the internal hopper with insert.

26- Close the lid by pushing the pin to the right then release and close.

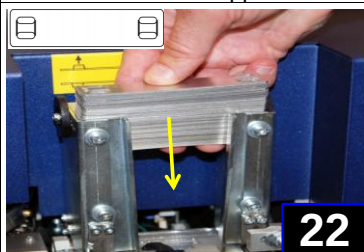

22

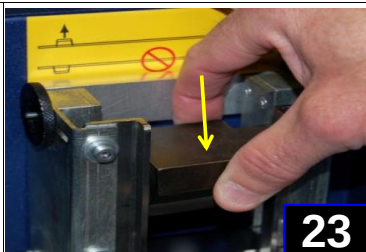

23



24



25



26

27- Turn the power ON then press PAUSE/START button on display screen.

28- Select the desired marker plate using SELECT marker plate from the menu.


29- Single-click on marker plate to enter custom text.

30- Select PRINTER icon to print then enter number of copies. Select COM PORT (may need to be changed).


31- SAVE the file.




27

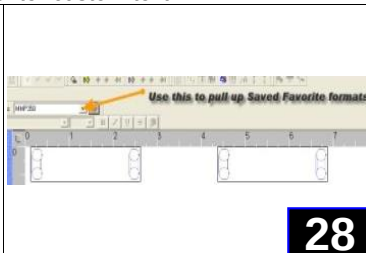


28

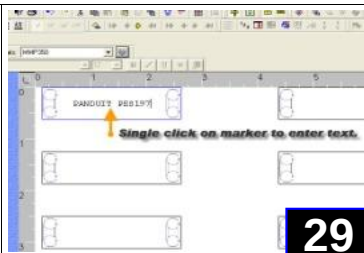

29

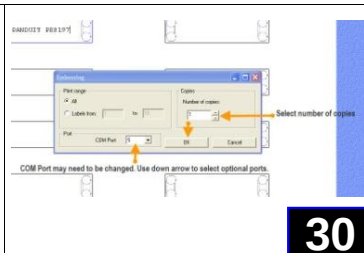

30

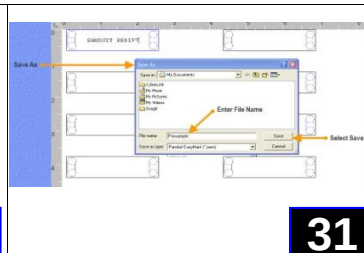

31



Equipment Needed:
PES197 EMBOSSE
Application CD & Manual
POWER SUPPLY CABLE
SERIAL CABLE
OPERATION MANUAL

Tools Needed:
Phillips screwdriver
Box cutter

Safety Equipment

Glasses