





1.




The mounting hardware used to secure the raceway shall be appropriate for the mounting surface.

2.

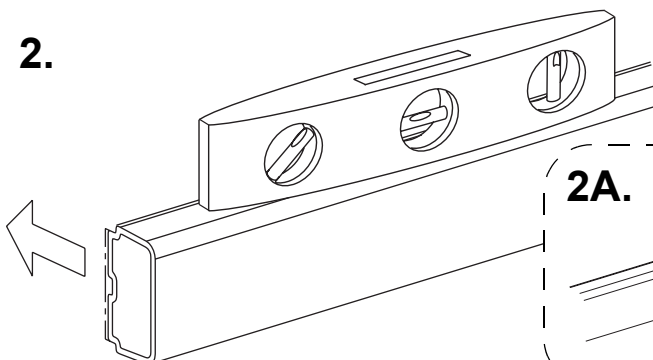

2A.

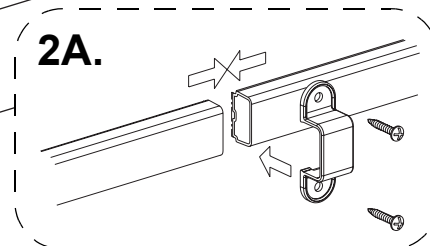


Fill Capacity Table For: Voice Grade 24 AWG UTP and Data Grade 24 AWG UTP Cables


Raceway Type	Voice Grade Cables		Data Grade Cables					
	24 AWG UTP CM/CMR		24 AWG UTP CM					
	4 pr		25pr		Cat.5- 4 pr		Cat.6	
	DIA.: 0.190"		DIA.: 0.422"		DIA.: 0.217"		DIA.: 0.275"	
	20% FILL	40% FILL	20% FILL	40% FILL	20% FILL	40% FILL	20% FILL	40% FILL
LDS3	1	2	0	0	0	1	0	1
LDS5	2	5	0	0	2	4	1	2

POWER CABLING - ADDITIONAL INSTRUCTIONS

3.

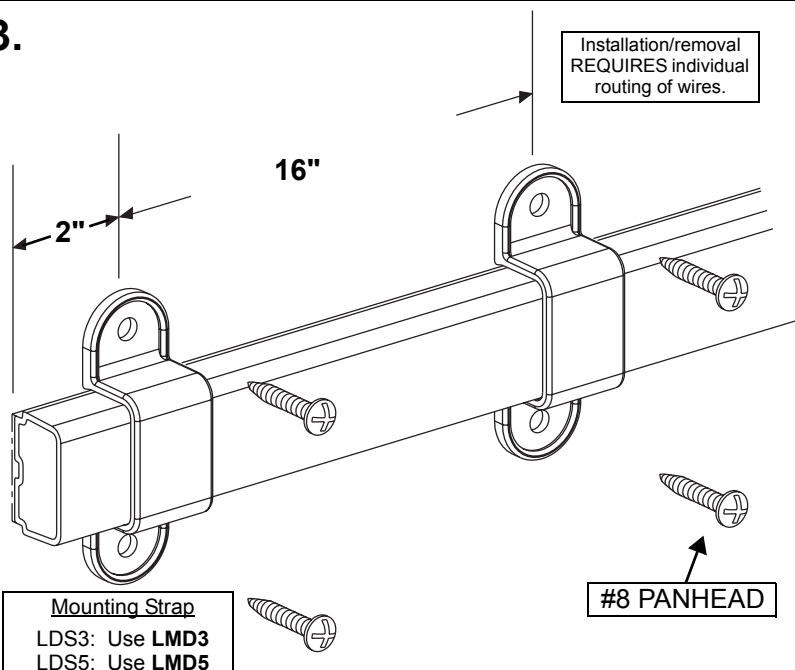

3A.

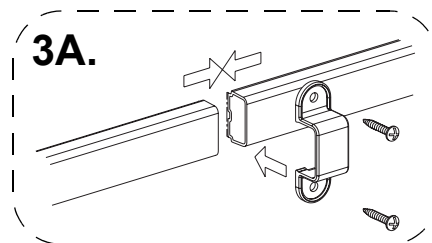

Fill Capacity Table For: Electrical Cables

Raceway Type	Electrical		
	14 AWG	12 AWG	10 AWG
	THHN	THHN	THHN
	T90	T90	T90
	DIA: 0.105"	DIA: 0.122"	DIA: 0.153"
LDS3	9	6	4
LDS5	12	8	5

* WIRES NOT BUNDLED