PANZONE Wall Mount Cabinet Accessories

PANDUIT

**INSTRUCTIONS V00030AF**
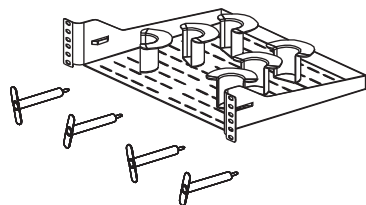
PZCHSM2
PANZONE Horizontal Slack Manager

PZCRR
*PANZONE* Rear Equipment Rail Kit

PZBR4
PANZONE 4" Bend Radius Post Kit

PZBR3
PANZONE 3" Bend Radius Post Kit

**PZBR3.5**
PANZONE 3.5" Bend Radius Post Kit

PZCFK
PANZONE Fan Kit

PANZONE Fan Kit (PZCFK)

Fan kits are installed using (4)#10-32 screws and lockwashers provided with kit as shown below. If only one fan kit is used, install the provided blank on the opposite wall using (4) #10-32 screws and lockwashers provided.

**Scenario 1:** Switches not exceeding 120 watts of total heat output use fan kit as shown.

Scenario 2: POE (Power over Ethernet) or switches totaling over 120 watts of total heat, use two fan kits mount second fan where blank is shown.

Blank

Fan Kit

#10-32 Screws and Lockwashers (8 Places)
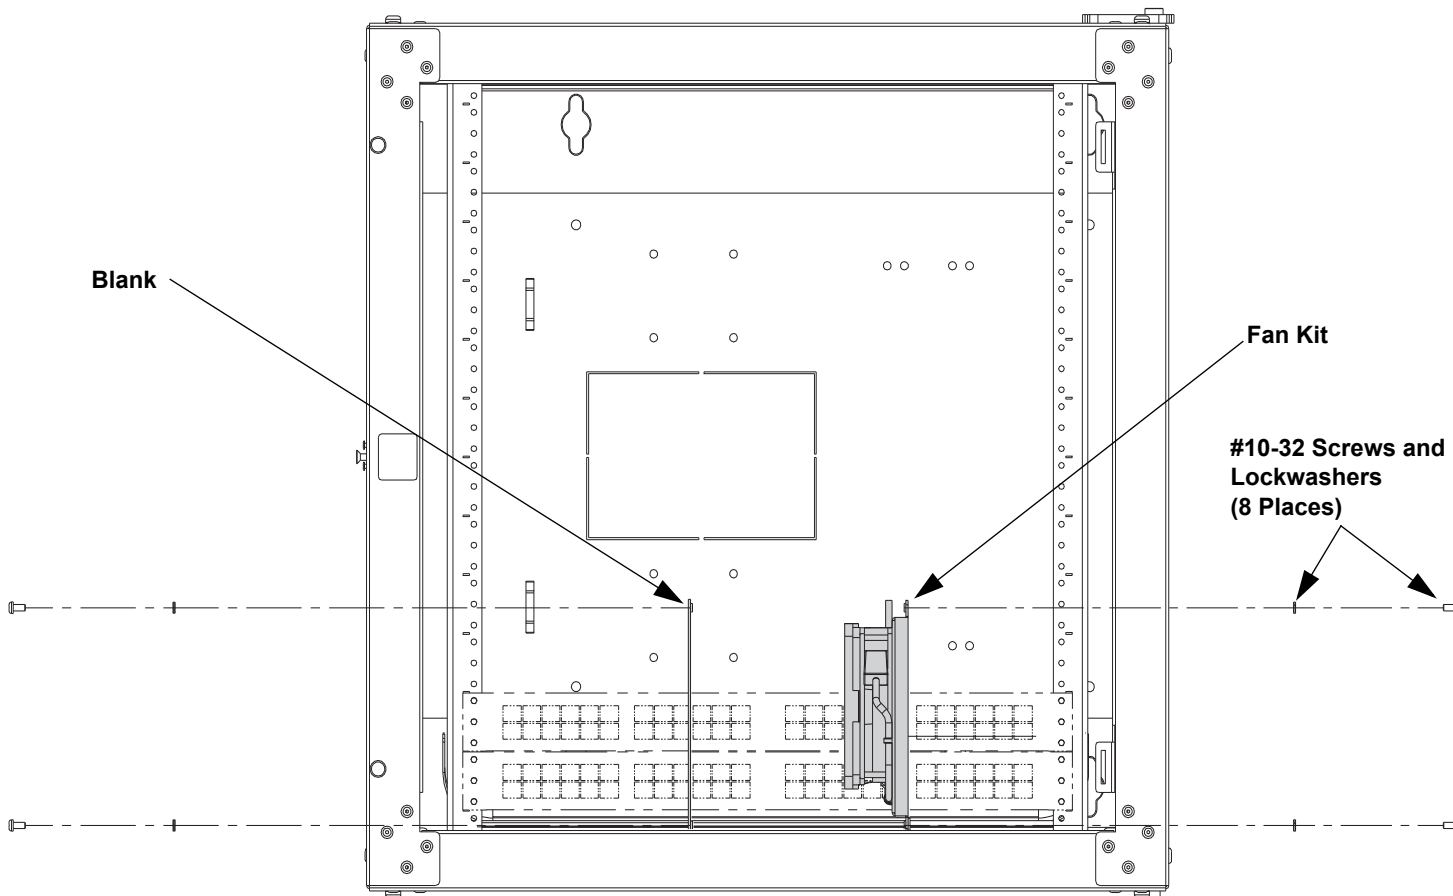
Note: When using switches with side air intake and opposite side exhaust use one fan without fan blank

Mounting Rail Installation (PZCRR)
To install mounting rail use (4)#12-24 screws at desired location as shown below

Mounting Rail

Mounting Hardware
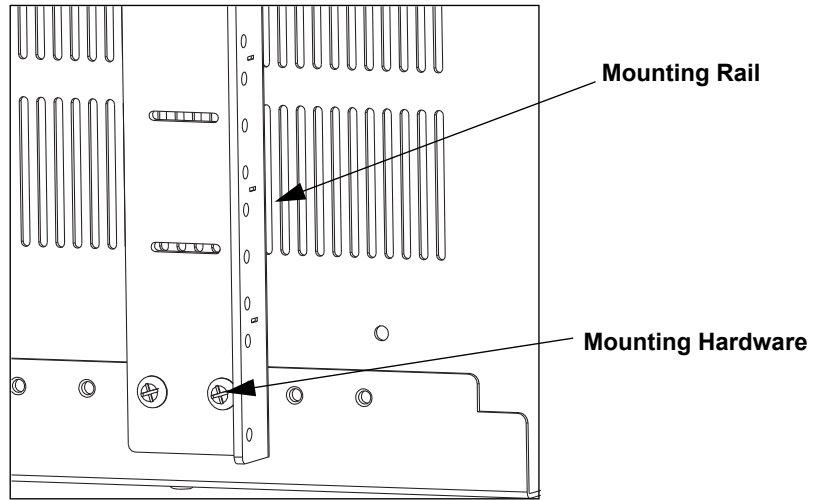
PANZONE Horizontal Slack Manager
Install tray using (4) #12-24 x 1/2 screws provided at desired RU as shown in figure 3. Refer to recommended layout section for optimal mounting location(s).

Figure 3

Screw Mounting Locations
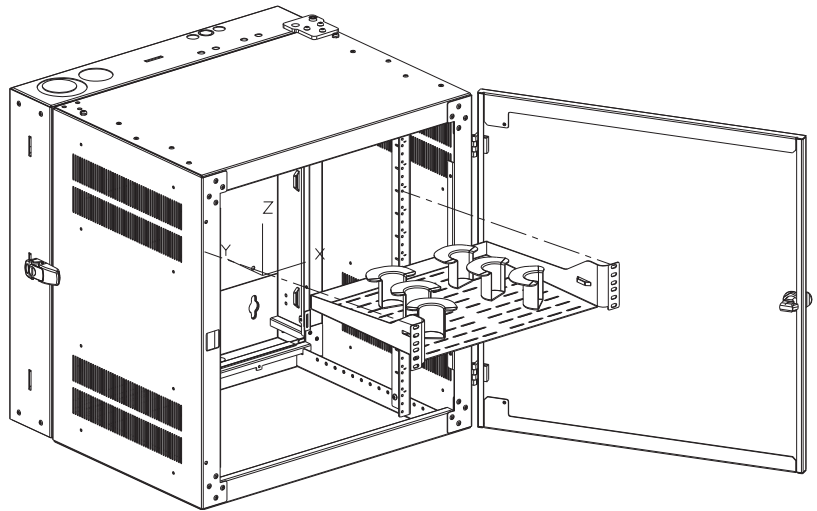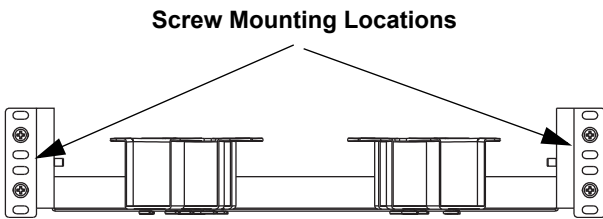
Bend Radius Post Installation
Bend radius posts can be installed at any rack location using (1)#12-24 x 2.5" [(1) #12-24 x 1.5" for PZBR3]screw provided as shown in Figure 1. Post can be customized by removing tabs as show in Figure 2.
Note: Post may be installed over active equipment mounting locations
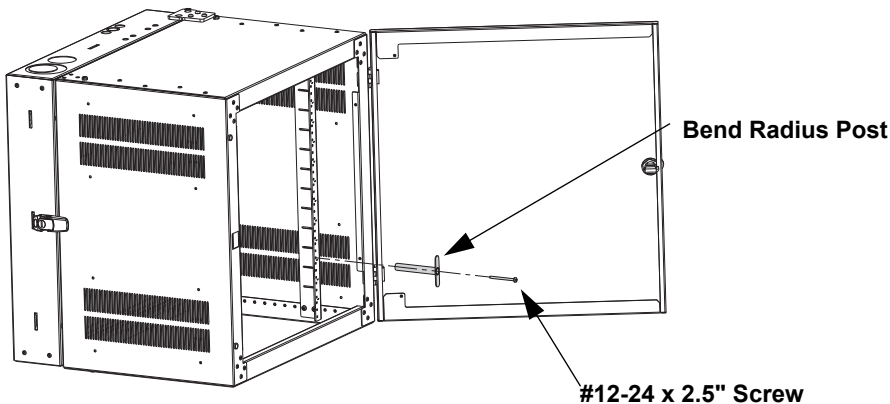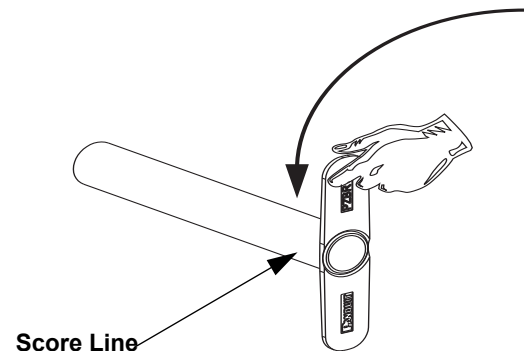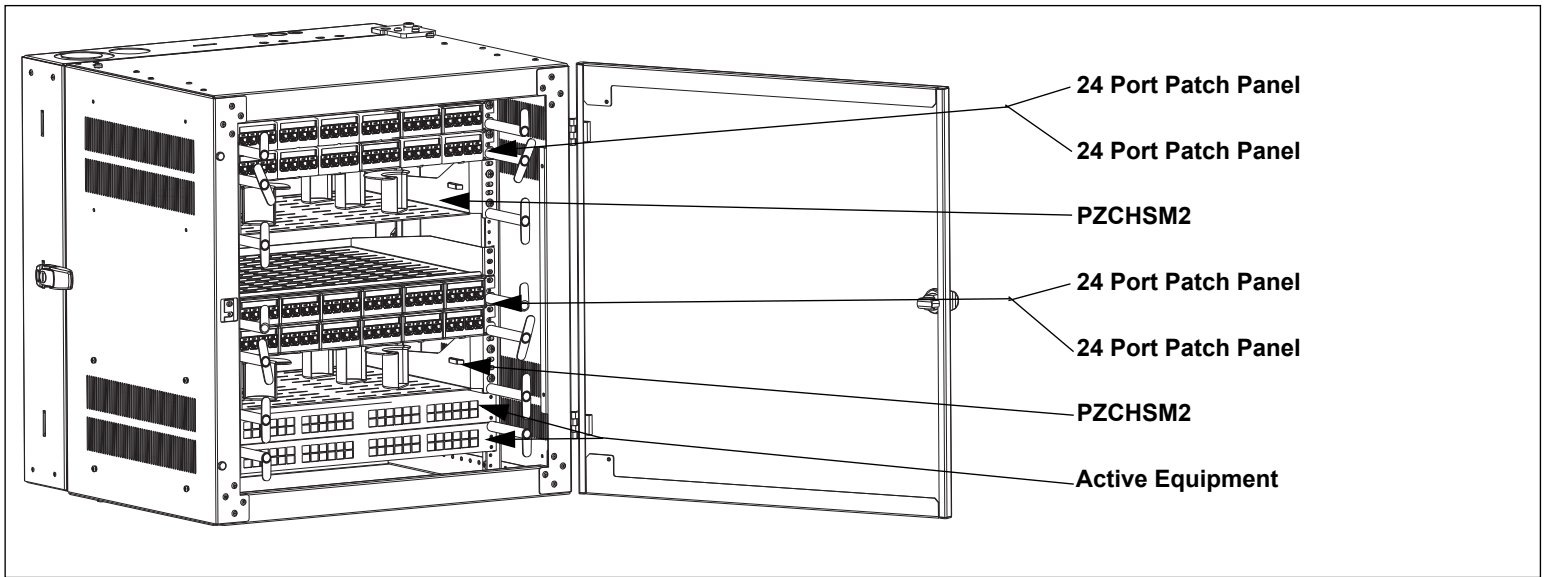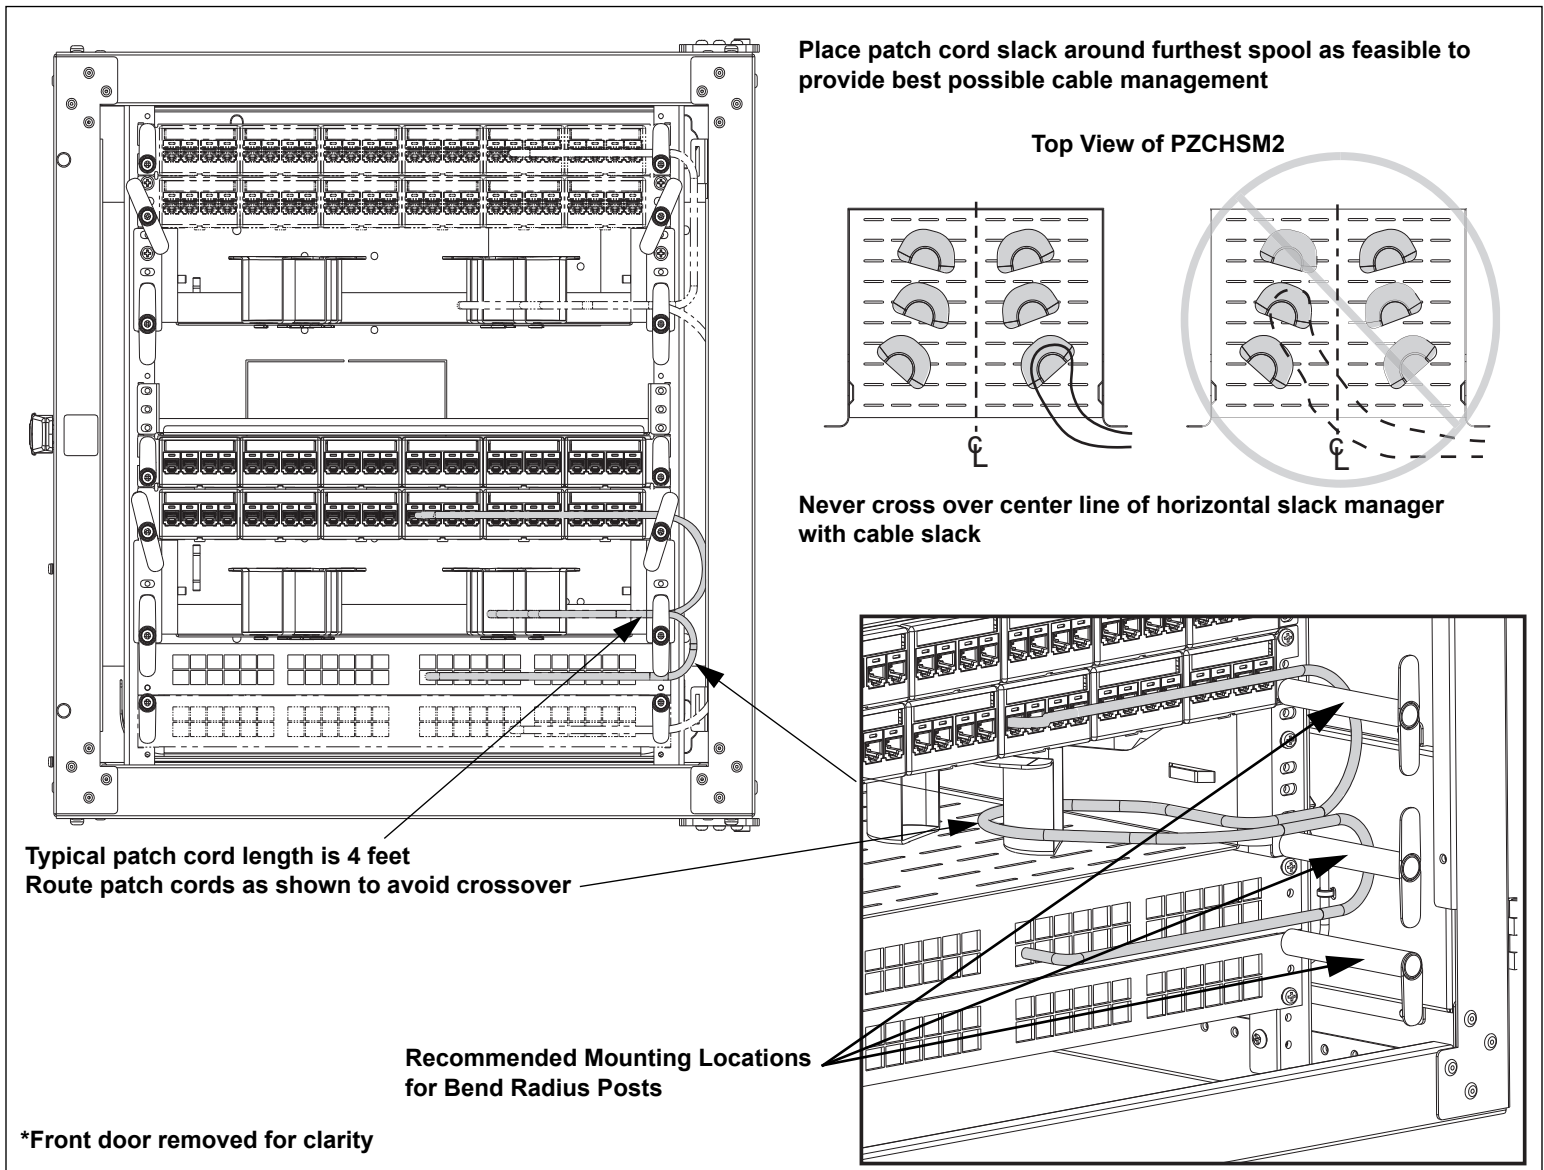
Figure 1

Figure 2

Bend Radius Post

Score Line

#12-24 x 2.5" Screw

Recommended Layout

24 Port Patch Panel

24 Port Patch Panel

PZCHSM2

24 Port Patch Panel

24 Port Patch Panel

PZCHSM2

Active Equipment

Recommended Cable Routing Guide

Place patch cord slack around furthest spool as feasible to provide best possible cable management

Top View of PZCHSM2

Never cross over center line of horizontal slack manager with cable slack

Typical patch cord length is 4 feet
Route patch cords as shown to avoid crossover

Recommended Mounting Locations for Bend Radius Posts

*Front door removed for clarity

Typical patch cord length is 5 feet
Route patch cords as shown to avoid crossover

**Recommended Mounting Locations
for Bend Radius Posts**

**Routed to
top horizontal
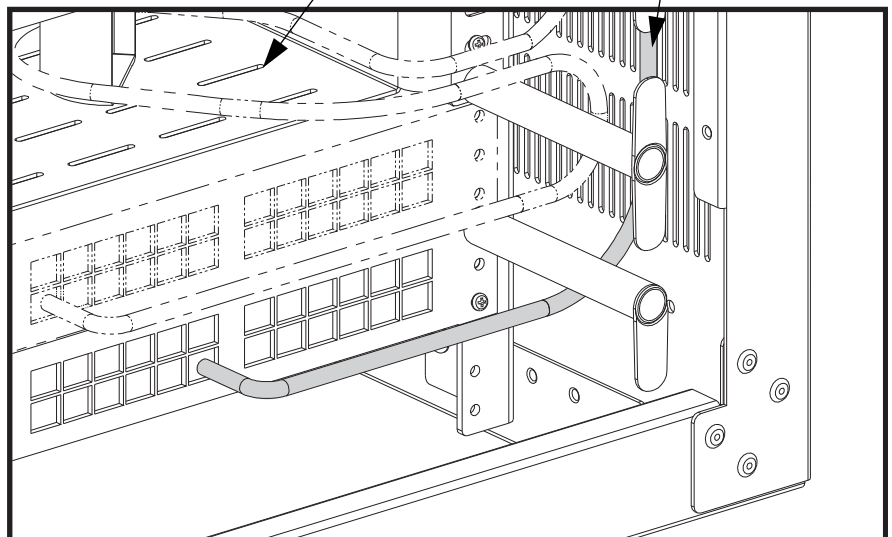slack manager**

Lower Horizontal Manager
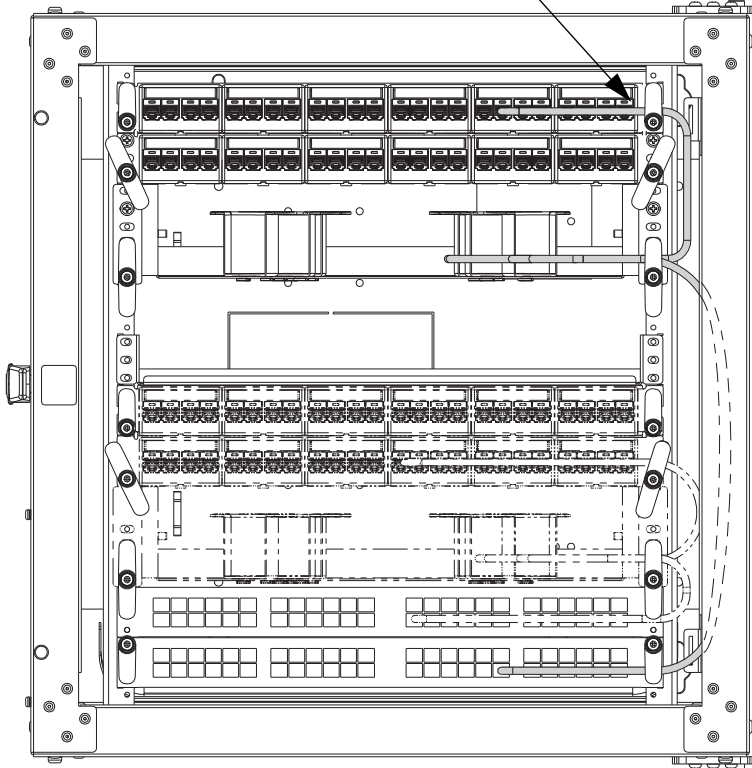
**Route patch cords going to top horizontal
slack manager towards the outside of the
cabinet to avoid cross overs with patch
cords going to lower slack manager**

*Front door removed for clarity