



BACKFEED FITTING



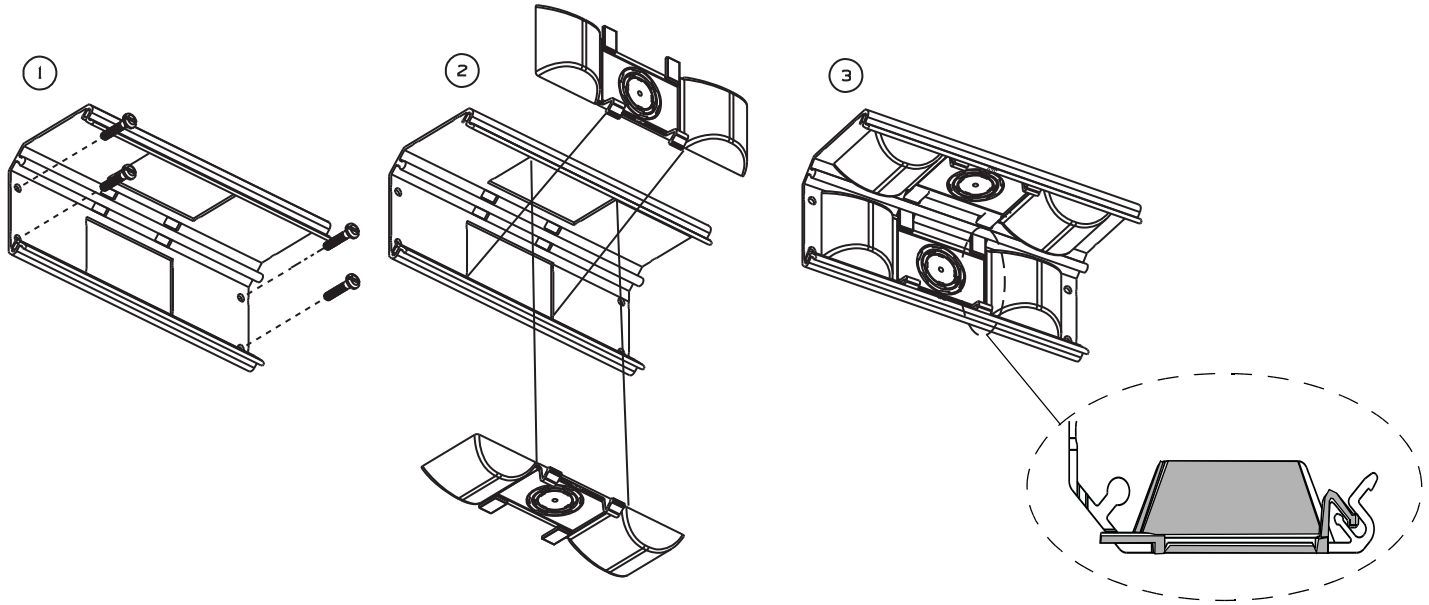


POWER ROUTING

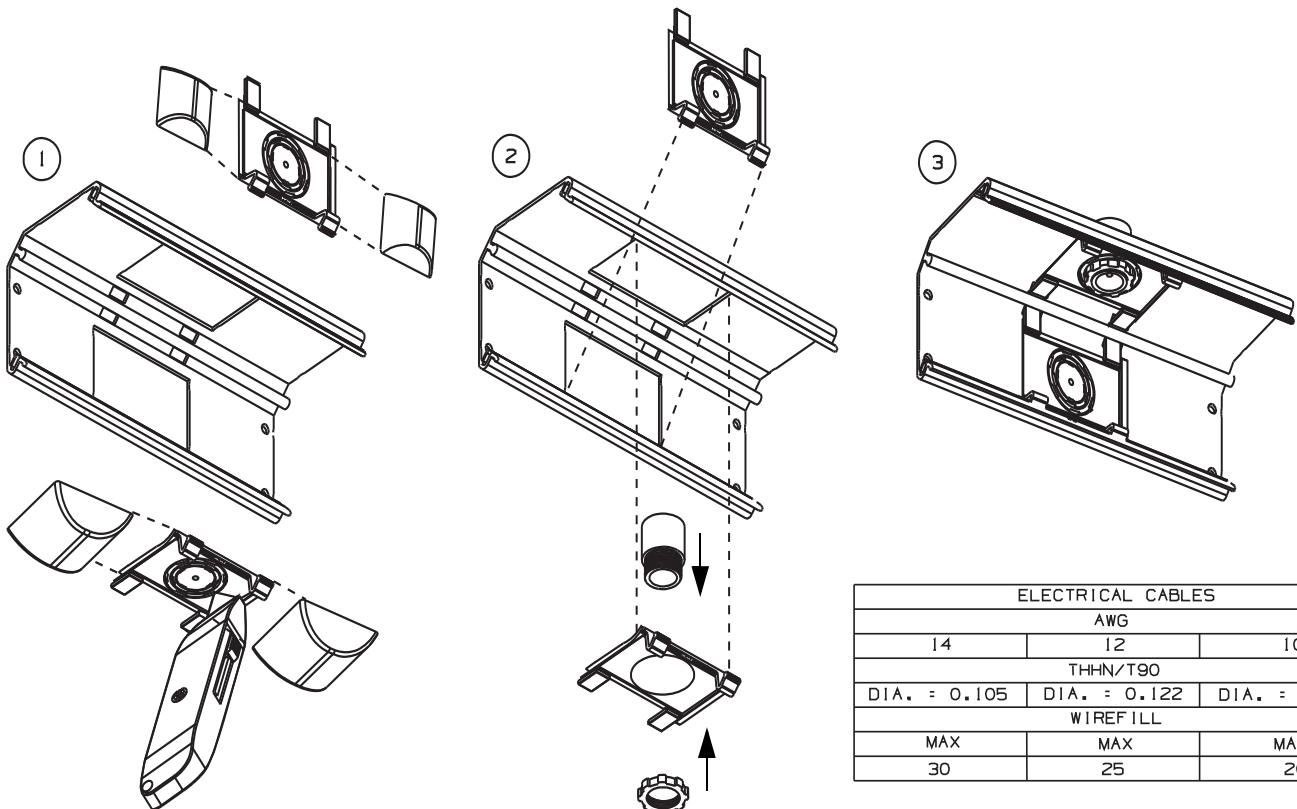




ELECTRICAL CABLES		
AWG		
14	12	10
THHN/T90		
DIA. = 0.105	DIA. = 0.122	DIA. = 0.153
WIREFILL		
MAX	MAX	MAX
30	25	20

DATA ROUTING

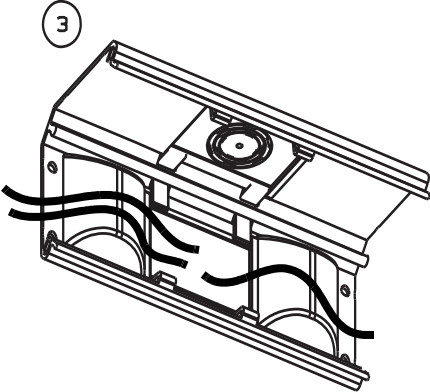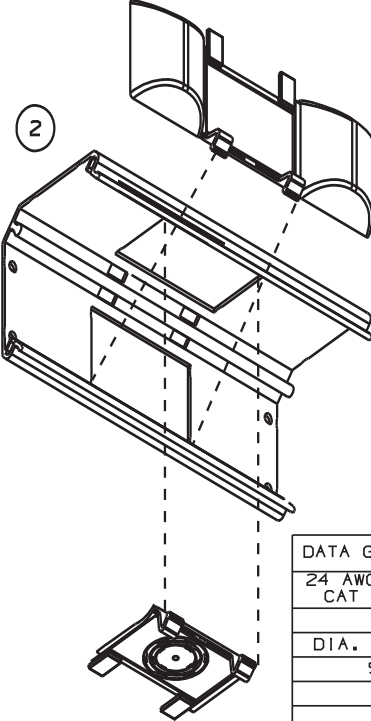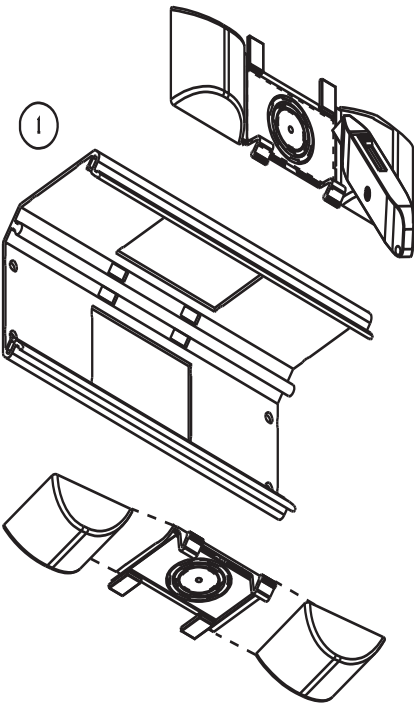

DATA GRADE CABLE	COAX CABLE	FIBER OPTIC CABLE
24 AWG/UTP CM CAT 6 4 PR	RG59/U	2 STRAND
DIA. = 0.250	DIA. = 0.242	DIA. = 0.175
SPEC 40%	SPEC 40%	SPEC 40%
21	23	44

POWER & DATA ROUTING

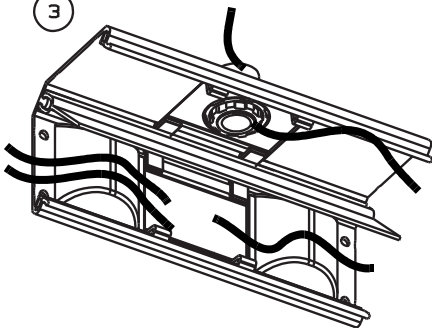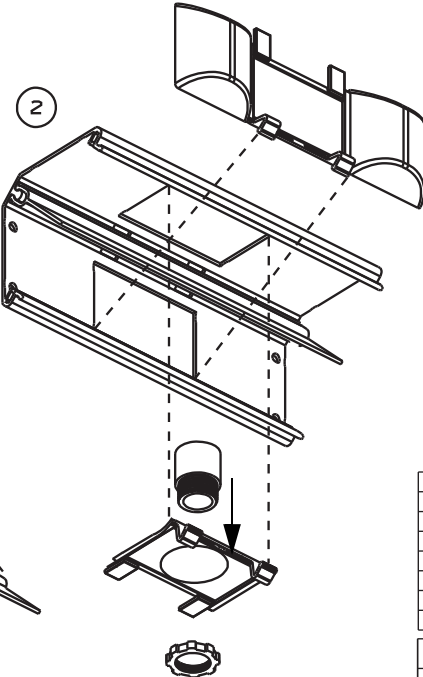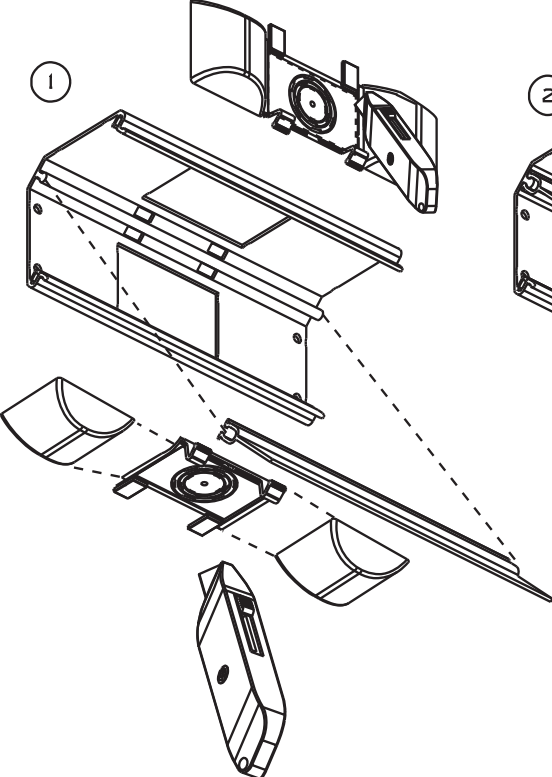

*ELECTRICAL CABLES		
AWG		
14	12	10
THHN/T90		
DIA. = 0.105	DIA. = 0.122	DIA. = 0.153
WIREFILL		
MAX	MAX	MAX
18	17	16

DATA GRADE CABLE	COAX CABLE	FIBER OPTIC CABLE
24 AWG/UTP CM CAT 6 4 PR	RG59/U	2 STRAND
DIA. = 0.250	DIA. = 0.242	DIA. = 0.175
SPEC 40%	SPEC 40%	SPEC 40%
9	10	20

* WIRES NOT BUNDLED