THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

5.50 REF.
[139.7]

8.50 REF.
[215.9]

## INSTALLATION INSTRUCTIONS

Printed In USA

**SPEC GRADE**

### INSTALLATION INSTRUCTIONS

**NOTICE:** Connect only copper or copper-clad wire to this device.

Cu AL

**WARNING:** Turn off power to circuit before installing this device. Improper wiring of any electrical device can cause serious injury or death and should only be installed by an Electrician or other qualified person.

- STRIP WIRES – one inch for side wire looping. For back wiring, see strip gage on device.
- CONNECT WIRES to terminals per diagram on back panel. Terminals will accept #10 – #14 AWG. Select appropriate wire size in accordance with NEC and local codes. Do NOT tin stranded conductors.
- INSTALL DEVICE in wall box using mounting screws provided. Install cover plate (not provided).

Instruction Sheet RW275

REVERSE SIDE

5.50 REF.
[139.7]

8.50 REF.
[215.9]

INSTALLATION INSTRUCTIONS

Printed In USA

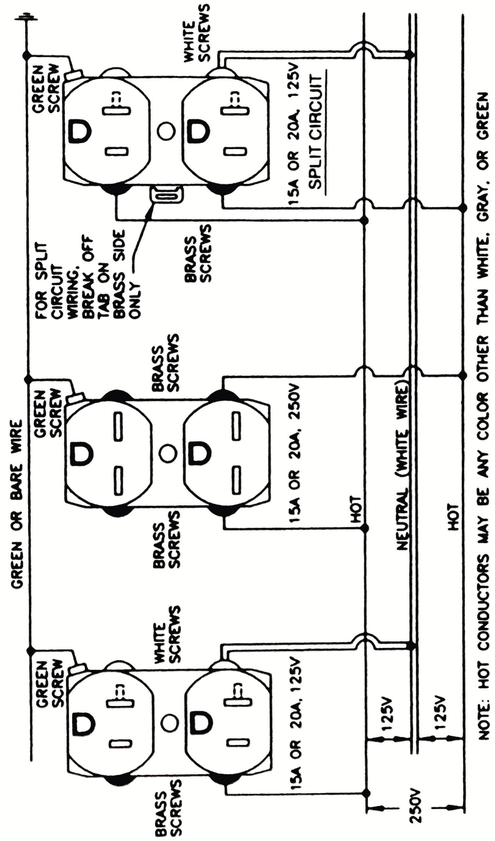


Instruction Sheet RW275

FRONT SIDE

NOTES:

1. PANDUIT PART NUMBER RW275.
2. MATERIAL TO BE 50# WHITE OFFSET.
3. COLOR OF INK TO BE BLACK.
4. FOLD THE 5-1/2" X 8-1/2" TO 5-1/2" X 4-1/4" WITH THE WIRING DIAGRAM EXPOSED ON FRONT SIDE. THEN FOLD AGAIN TO 2-3/4" X 4-1/4" WITH "PRINTED IN USA" ON FRONT.
5. BAND IN 100 PER BUNDLE.

| REV | DATE | BY | CHK | DESCRIPTION | ECN | CHK | CUST | SUP |
|---|---|---|---|---|---|---|---|---|
| R | 08.02.10 | BDK | JBN | RELEASED TO PRODUCTION | 09D031BA-DS | RMHI | | RTFI |

CAD FILENAME/LAYERS 09D031BA_DS_RW275/00A

PANDUIT CORP TINLEY PARK, ILLINOIS

BUYOUT OUTLET INSTRUCTION SHEET (RW275)

CONTROL DRAWING

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ± (.XX) ± (.XXX) ± ANGLES ±

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES. THIRD ANGLE PROJECTION

DRAWN BY BDK

MAT'L/COLOR: SEE NOTES

SCALE NONE

DATE 07.29.10

CK'D JBN

DRAWING NO. 09D031BA-DS

DWG SIZE C