
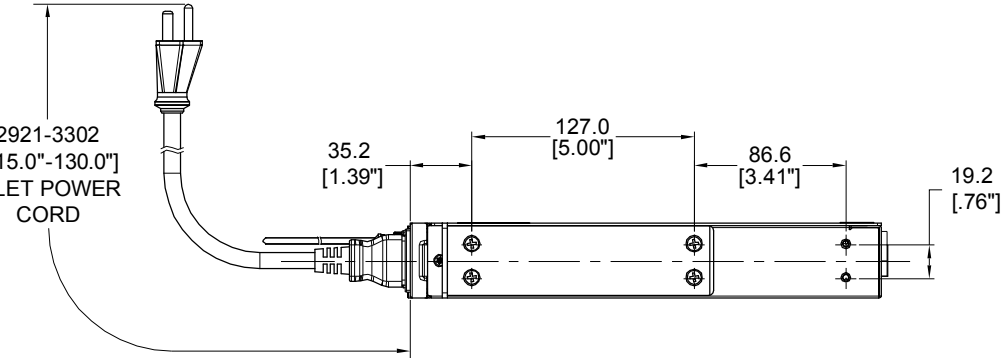


B

A

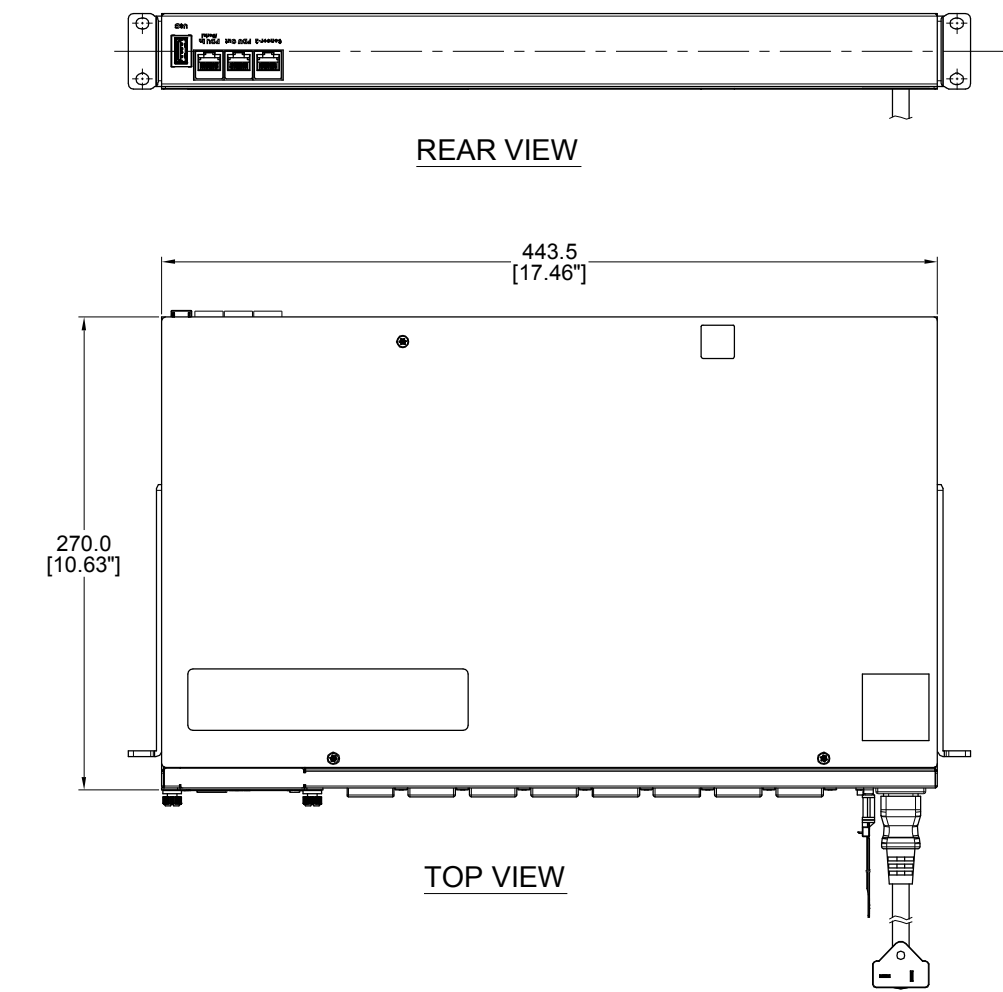

PANDUIT P/N	WEIGHT
P08E15M	6.1kg

- NOTES:
- IDENTIFICATION:
    - UNIT TYPE: MONITORED SWITCHED
    - ORIENTATION: HORIZONTAL, 1U
    - OUTLET QTY&TYPE: (8) 5-20R
    - BREAKER QTY&TYPE: N/A
    - INPUT VOLTAGE: 100-120VAC
    - INPUT CURRENT: 20A (16A DERATED)
    - INPUT PHASE: SINGLE-PHASE
    - RATED POWER: 1.9kVA
    - INPUT PLUG: NEMA 5-20P
    - INPUT CORD LENGTH: 3m [10']
  - ACCESSORIES:
    - POCKET GUIDE
    - QTY: (4) M6 X 12 PAN HEAD MACHINE SCREWS
    - QTY: (4) M6 CAGED NUT
  - RoHS COMPLIANT
  - VISIT PANDUIT'S ON-LINE CATALOG AT [WWW.PANDUIT.COM](http://WWW.PANDUIT.COM) FOR FOR ADDITIONAL PRODUCT INFORMATION CONTAINED IN THE SPECIFICATION SHEET AS WELL AS A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
  - MAXIMUM ALLOWABLE INPUT POWER = 1.9kW
  - INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES

PLUG  
20 AMP, 125V  
STRAIGHT BLADE  
NEMA 5-20P

EIGHT (8)  
RECEPTACLES  
20 AMP, 125V  
STRAIGHT BLADE  
NEMA 5-20R

01A	09/21/2017	WSJ	MIM	EDM	INITIAL RELEASE	P08E15M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY

SIGN \_\_\_\_\_  
DATE \_\_\_\_\_  
PRINT \_\_\_\_\_

TITLE

INTELLIGENT SERIES PDU  
P08E15M  
CUSTOMER DRAWING

ITEM REVISION NAME

DATASHEET FILE NAME:

UNLESS OTHERWISE SPECIFIED  
DIMENSIONAL TOLERANCE ARE: mm [IN]

Tolerance(mm)  
0<L<50 ±0.5  
50<L<250 ±1.0  
250<L<500 ±1.5  
500<L<1000 ±2.5  
1000<L<2000 ±4.0

THIRD ANGLE  
PROJECTION

MATERIAL/COLOR:

N/A

DRAWING NUMBER:

P08E15M\_DC

DRAWN BY: WSJ  
DATE: 09/21/2017  
CHK: SEAN  
SCALE: NONE

SHT 1 OF 1

SCALE: B

2

1