


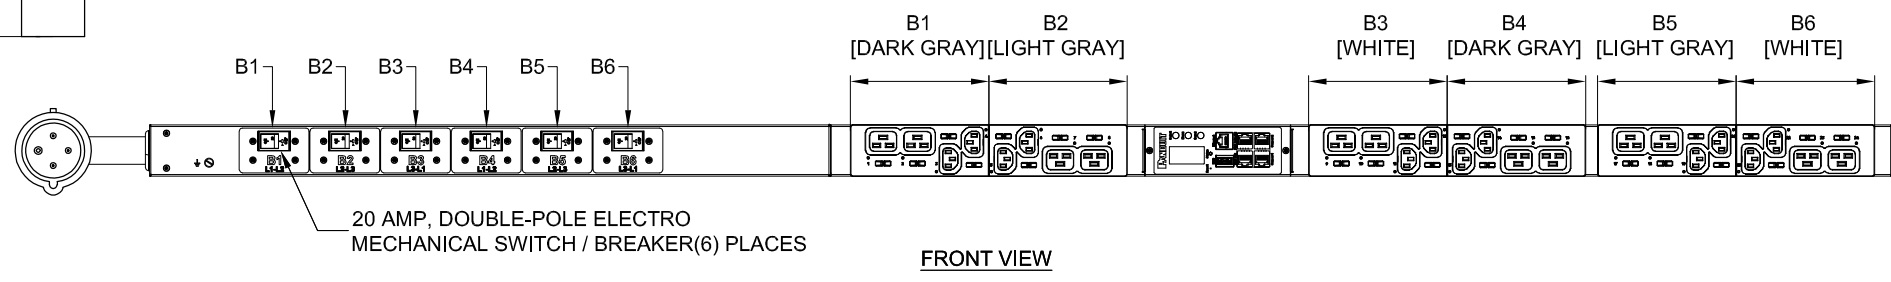
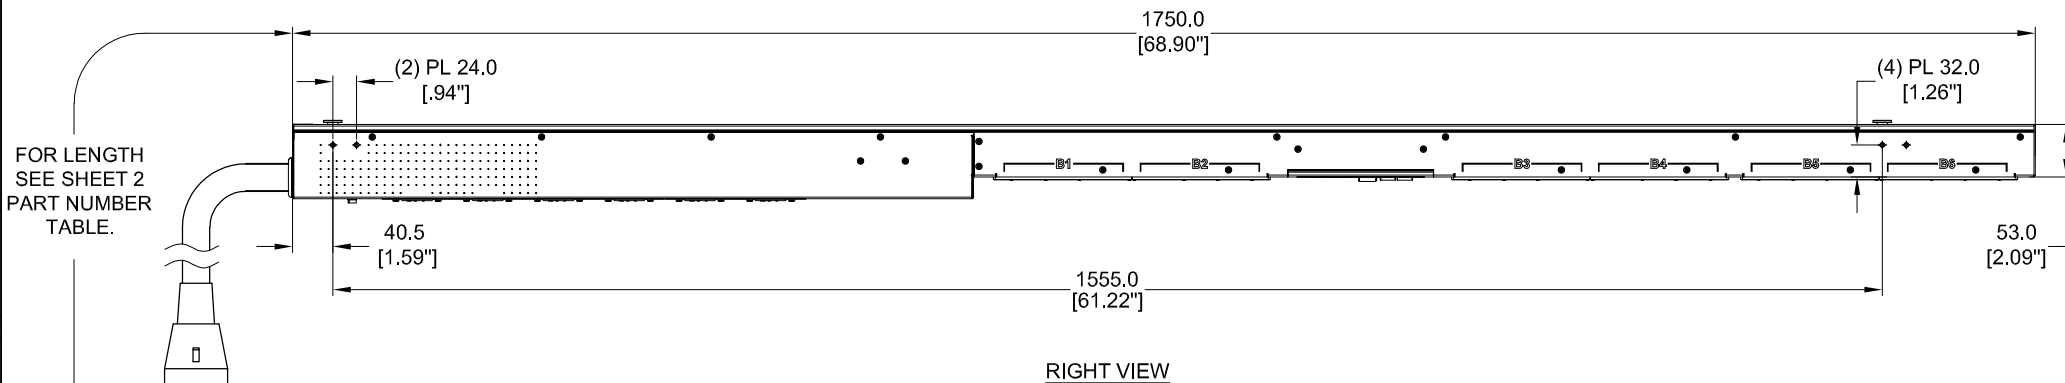


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

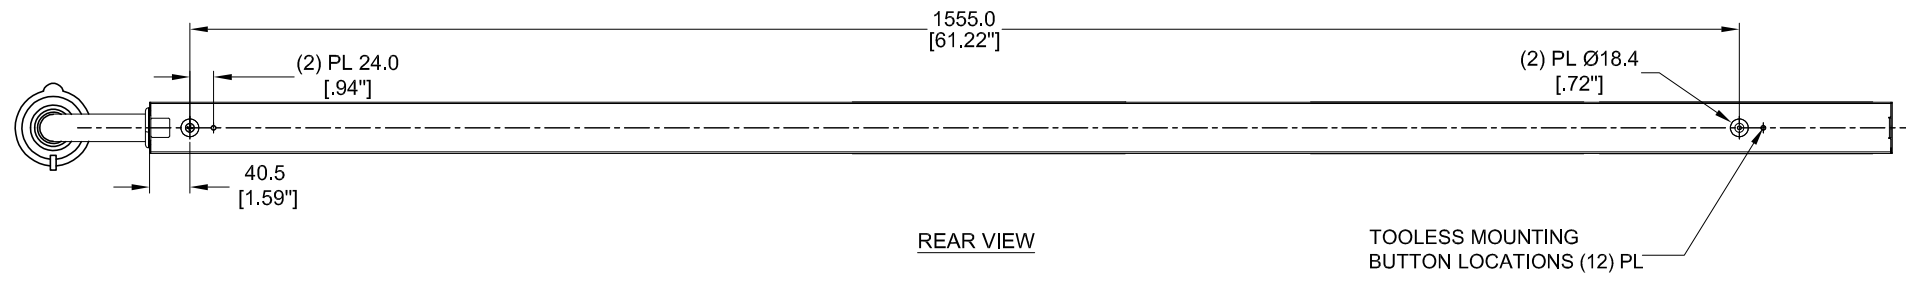

XX: FINISHED GOOD COLOR BL =BLACK RD =RED WH =WHITE YL =YELLOW BU =BLUE GN =GREEN	Y: INPUT FEED TYPE 1 =TOP-END FED 2 =BOTTOM-END FED	Z: INPUT CORD LENGTH A =1 METER B =2 METER C =3 METER
---	---	--

PLUG/RECEPTACLE BLOCK

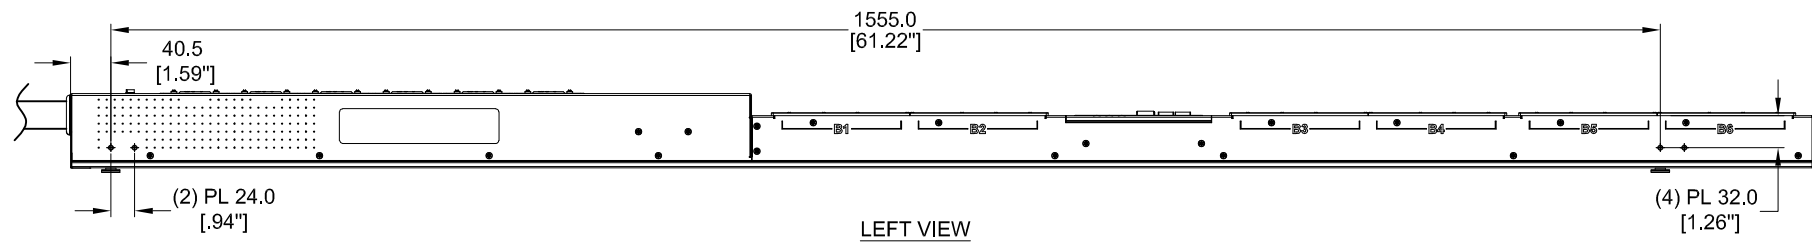

PLUG
IEC 60309, 3P 4W, 9H
IP44 (SPLASHPROOF)
60A, 250V, 3-PHASE MAX RATED INPUT
48A DERATED



RECEPTACLES
IEC 60320/C19
16A, 250V MAX RATED OUTPUT



RECEPTACLES
IEC 60320/C13
10A, 250V MAX RATED OUTPUT

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
02A	06/07/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT	P24E32M
01B	12/14/2017	GEORGE	MIM	EDM	UPDATED DESCRIPTION	P24E32M
01A	10/10/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P24E32M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL, PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN DATE PRINT	
TITLE INTELLIGENT SERIES PDU P24E32M-XXYZ CUSTOMER DRAWING			
ITEM REVISION NAME:		PANDUIT	
DATASHEET FILE NAME:		MATERIAL/COLOR: N/A	
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN] Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0		DRAWING NUMBER: P24E32M_DC	
DRAWN BY GEORGE	DATE 10/10/2017	CHK SEAN	SCALE NONE
SHT 1 OF 2		SCALE B	



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P24E32M	VERTICAL,(12) C13,(12) C19,MONITORED SWITCHED,200-240V/60A/3 PHASE DELTA, TOP-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM/-127MM) 10' [+10"/-5"]	13.9kg
P24E32M-BL1A	VERTICAL,(12) C13,(12) C19,MONITORED SWITCHED,200-240V/60A/3 PHASE DELTA, TOP-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	11.3kg
P24E32M-BL1B	VERTICAL,(12) C13,(12) C19,MONITORED SWITCHED,200-240V/60A/3 PHASE DELTA, TOP-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM/-89MM) 6.5' [+3.5"/-1.75"]	12.6kg
P24E32M-RD1A	VERTICAL,(12) C13,(12) C19,MONITORED SWITCHED,200-240V/60A/3 PHASE DELTA, TOP-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	11.3kg
P24E32M-RD1B	VERTICAL,(12) C13,(12) C19,MONITORED SWITCHED,200-240V/60A/3 PHASE DELTA, TOP-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM/-89MM) 6.5' [+3.5"/-1.75"]	12.6kg
P24E32M-RD1C	VERTICAL,(12) C13,(12) C19,MONITORED SWITCHED,200-240V/60A/3 PHASE DELTA, TOP-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM/-127MM) 10' [+10"/-5"]	13.9kg
P24E32M-WH1A	VERTICAL,(12) C13,(12) C19,MONITORED SWITCHED,200-240V/60A/3 PHASE DELTA, TOP-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	11.3kg
P24E32M-WH1B	VERTICAL,(12) C13,(12) C19,MONITORED SWITCHED,200-240V/60A/3 PHASE DELTA, TOP-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM/-89MM) 6.5' [+3.5"/-1.75"]	12.6kg
P24E32M-WH1C	VERTICAL,(12) C13,(12) C19,MONITORED SWITCHED,200-240V/60A/3 PHASE DELTA, TOP-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM/-127MM) 10' [+10"/-5"]	13.9kg
P24E32M-YL1A	VERTICAL,(12) C13,(12) C19,MONITORED SWITCHED,200-240V/60A/3 PHASE DELTA, TOP-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	11.3kg
P24E32M-YL1B	VERTICAL,(12) C13,(12) C19,MONITORED SWITCHED,200-240V/60A/3 PHASE DELTA, TOP-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM/-89MM) 6.5' [+3.5"/-1.75"]	12.6kg
P24E32M-YL1C	VERTICAL,(12) C13,(12) C19,MONITORED SWITCHED,200-240V/60A/3 PHASE DELTA, TOP-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM/-127MM) 10' [+10"/-5"]	13.9kg
P24E32M-BU1A	VERTICAL,(12) C13,(12) C19,MONITORED SWITCHED,200-240V/60A/3 PHASE DELTA, TOP-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	11.3kg
P24E32M-BU1B	VERTICAL,(12) C13,(12) C19,MONITORED SWITCHED,200-240V/60A/3 PHASE DELTA, TOP-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM/-89MM) 6.5' [+3.5"/-1.75"]	12.6kg
P24E32M-BU1C	VERTICAL,(12) C13,(12) C19,MONITORED SWITCHED,200-240V/60A/3 PHASE DELTA, TOP-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM/-127MM) 10' [+10"/-5"]	13.9kg
P24E32M-GN1A	VERTICAL,(12) C13,(12) C19,MONITORED SWITCHED,200-240V/60A/3 PHASE DELTA, TOP-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	11.3kg
P24E32M-GN1B	VERTICAL,(12) C13,(12) C19,MONITORED SWITCHED,200-240V/60A/3 PHASE DELTA, TOP-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM/-89MM) 6.5' [+3.5"/-1.75"]	12.6kg
P24E32M-GN1C	VERTICAL,(12) C13,(12) C19,MONITORED SWITCHED,200-240V/60A/3 PHASE DELTA, TOP-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM/-127MM) 10' [+10"/-5"]	13.9kg
P24E32M-BL2A	VERTICAL,(12) C13,(12) C19,MONITORED SWITCHED,200-240V/60A/3 PHASE DELTA, BOTTOM-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	11.3kg
P24E32M-BL2B	VERTICAL,(12) C13,(12) C19,MONITORED SWITCHED,200-240V/60A/3 PHASE DELTA, BOTTOM-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM/-89MM) 6.5' [+3.5"/-1.75"]	12.6kg
P24E32M-BL2C	VERTICAL,(12) C13,(12) C19,MONITORED SWITCHED,200-240V/60A/3 PHASE DELTA, BOTTOM-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM/-127MM) 10' [+10"/-5"]	13.9kg
P24E32M-RD2A	VERTICAL,(12) C13,(12) C19,MONITORED SWITCHED,200-240V/60A/3 PHASE DELTA, BOTTOM-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	11.3kg
P24E32M-RD2B	VERTICAL,(12) C13,(12) C19,MONITORED SWITCHED,200-240V/60A/3 PHASE DELTA, BOTTOM-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM/-89MM) 6.5' [+3.5"/-1.75"]	12.6kg
P24E32M-RD2C	VERTICAL,(12) C13,(12) C19,MONITORED SWITCHED,200-240V/60A/3 PHASE DELTA, BOTTOM-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM/-127MM) 10' [+10"/-5"]	13.9kg
P24E32M-WH2A	VERTICAL,(12) C13,(12) C19,MONITORED SWITCHED,200-240V/60A/3 PHASE DELTA, BOTTOM-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	11.3kg
P24E32M-WH2B	VERTICAL,(12) C13,(12) C19,MONITORED SWITCHED,200-240V/60A/3 PHASE DELTA, BOTTOM-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM/-89MM) 6.5' [+3.5"/-1.75"]	12.6kg
P24E32M-WH2C	VERTICAL,(12) C13,(12) C19,MONITORED SWITCHED,200-240V/60A/3 PHASE DELTA, BOTTOM-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM/-127MM) 10' [+10"/-5"]	13.9kg
P24E32M-YL2A	VERTICAL,(12) C13,(12) C19,MONITORED SWITCHED,200-240V/60A/3 PHASE DELTA, BOTTOM-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	11.3kg
P24E32M-YL2B	VERTICAL,(12) C13,(12) C19,MONITORED SWITCHED,200-240V/60A/3 PHASE DELTA, BOTTOM-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM/-89MM) 6.5' [+3.5"/-1.75"]	12.6kg
P24E32M-YL2C	VERTICAL,(12) C13,(12) C19,MONITORED SWITCHED,200-240V/60A/3 PHASE DELTA, BOTTOM-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM/-127MM) 10' [+10"/-5"]	13.9kg
P24E32M-BU2A	VERTICAL,(12) C13,(12) C19,MONITORED SWITCHED,200-240V/60A/3 PHASE DELTA, BOTTOM-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	11.3kg
P24E32M-BU2B	VERTICAL,(12) C13,(12) C19,MONITORED SWITCHED,200-240V/60A/3 PHASE DELTA, BOTTOM-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM/-89MM) 6.5' [+3.5"/-1.75"]	12.6kg
P24E32M-BU2C	VERTICAL,(12) C13,(12) C19,MONITORED SWITCHED,200-240V/60A/3 PHASE DELTA, BOTTOM-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM/-127MM) 10' [+10"/-5"]	13.9kg
P24E32M-GN2A	VERTICAL,(12) C13,(12) C19,MONITORED SWITCHED,200-240V/60A/3 PHASE DELTA, BOTTOM-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	11.3kg
P24E32M-GN2B	VERTICAL,(12) C13,(12) C19,MONITORED SWITCHED,200-240V/60A/3 PHASE DELTA, BOTTOM-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM/-89MM) 6.5' [+3.5"/-1.75"]	12.6kg
P24E32M-GN2C	VERTICAL,(12) C13,(12) C19,MONITORED SWITCHED,200-240V/60A/3 PHASE DELTA, BOTTOM-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM/-127MM) 10' [+10"/-5"]	13.9kg

B

B

A

A

02A	06/07/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT	P24E32M
01B	12/14/2017	GEORGE	MIM	EDM	UPDATED DESCRIPTION	P24E32M
01A	10/10/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P24E32M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN	
		DATE	
		PRINT	
TITLE INTELLIGENT SERIES PDU P24E32M-XXYZ CUSTOMER DRAWING			
ITEM REVISION NAME:			
DATASHEET FILE NAME:			
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR:	
 THIRD ANGLE PROJECTION		N/A	
		DRAWING NUMBER:	
		P24E32M_DC	
DRAWN BY GEORGE	DATE 10/10/2017	CHK SEAN	SCALE NONE
SHT 2 OF 2			SCALE B

