

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

- INC COLLING ROUBED ON	A RESTRICTED BASIS AND IS NOT TO BE
Material	High Conductivity Seamless Copper Tube
Plating	Electro-Tin
Wire Size	4/0 AWG
Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric
Wire Strip Length	1-1/4 in.
Stud Size	3/8 in.
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.
UL Temperature Rating	90°C
C.S.A Certified Wire Connector	Yes
Panduit Color Code on Barrel	PURPLE
Panduit Die Index No. on Barrel	P54
Alternate Industry Die Index No. () on Barrel	(15)





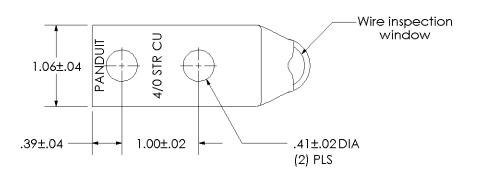

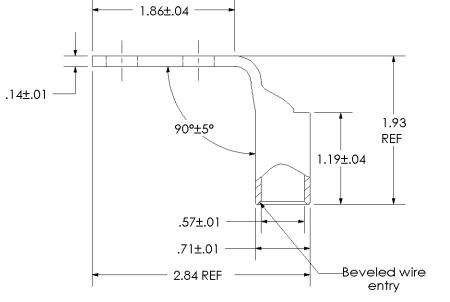



Wire Connector

						PAROUIT CORP. TINLEY PARK, ILL	LINOIS
						LCD4/0-38DF-X Copper Lug - Two-Hole, Standard Barrel, 90° Angle To	
00	8/02	SAB	DRL	RELEASED	10345	Copper Lug - Iwo-Hole, Standard Barrel, 90° Angle T	ongue
REV	DATE	BY	СНК	DESCRIPTION	ECN	SCALE DRAWING NO / CAD FILE LCD4_0-38DI	F-CUST