

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
P24E29M-XXYZ	SEE SHEET 2

SPECIFICATION:

1. STANDARD:	
UNIT TYPE:	MONITORED SWITCHED
ORIENTATION:	VERTICAL, 0U, FULL
OUTLET QTY&TYPE:	(18) C13, (6) C19
INPUT VOLTAGE:	200-240VAC
INPUT CURRENT:	30A (24A DERATED)
BREAKER QTY&TYPE:	(3) 20AMP, DOUBLE-POLE
INPUT PHASE:	THREE-PHASE DELTA
RATED POWER:	8.6kVA
INPUT PLUG:	NEMA L15-30P
INPUT POWER CORD:	SEE SHEET 2 FOR PART NUMBER TABLE
REGULATORY STANDARD:	RoHS COMPLIANT

2. ADDITIONAL:

NONE

3. ACCESSORIES:


(1) QUICK-START GUIDE

NOTES:


- PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES]
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
- FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL
- DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

IDENTIFICATION


FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: P24E29M-XX Y Z

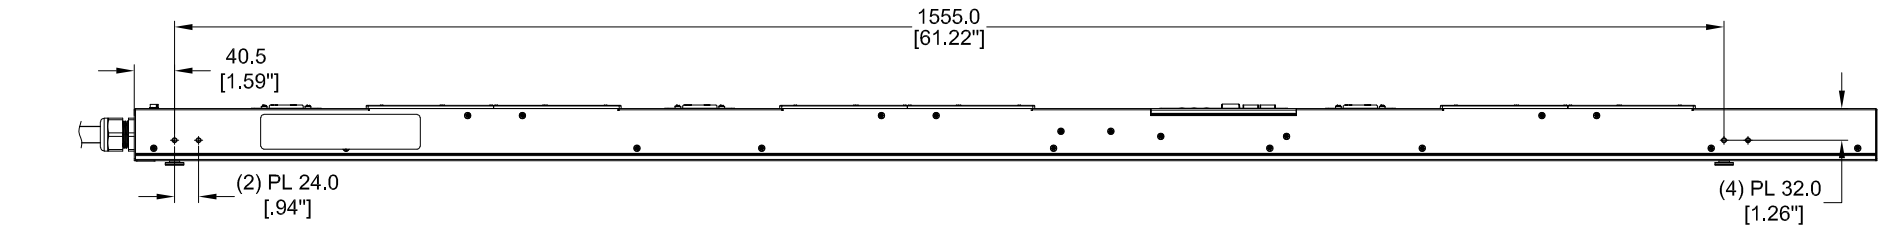


LEFT VIEW

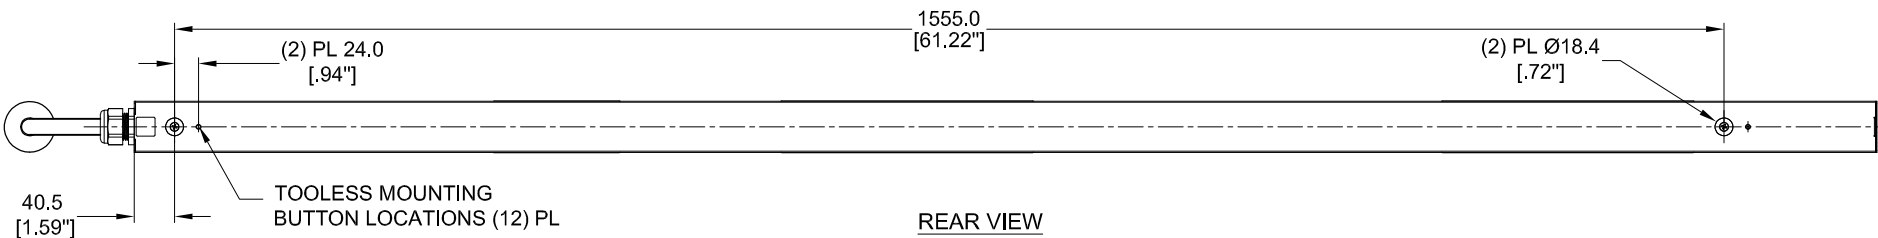


REAR VIEW

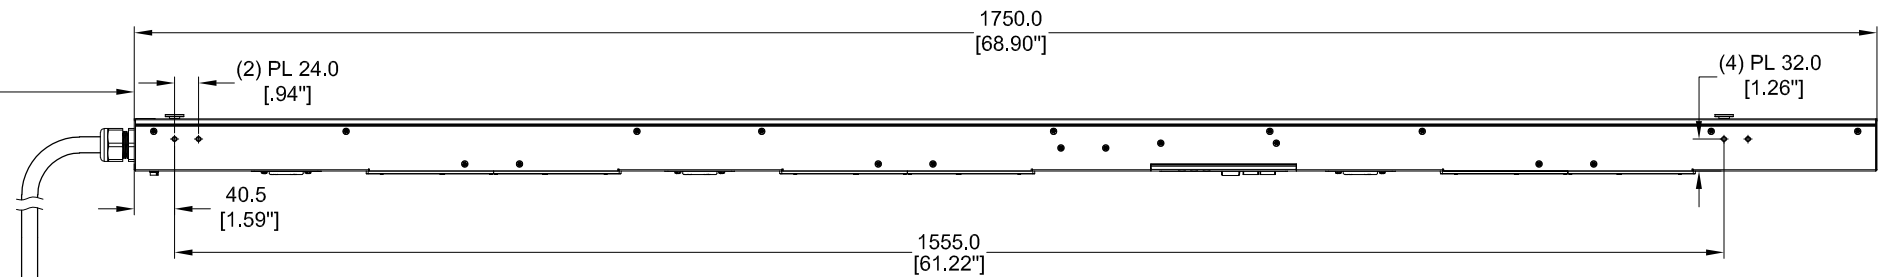

RIGHT VIEW

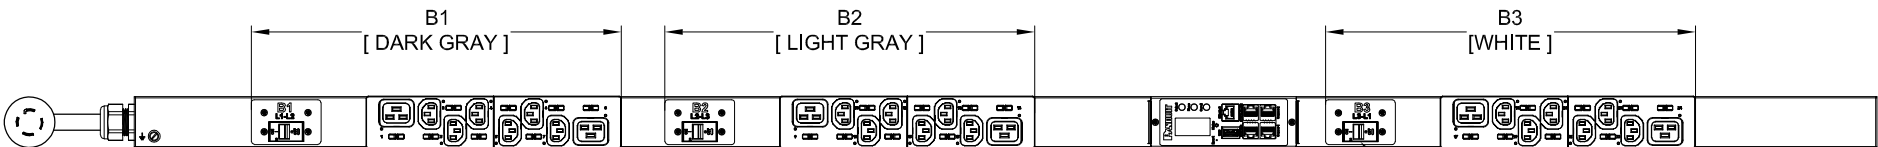

FRONT VIEW



BOTTOM VIEW

XX: FINISHED GOOD COLOR
BL=BLACK
RD=RED
WH=WHITE
YL=YELLOW
BU=BLUE
GN=GREEN

Y: INPUT FEED TYPE
1=TOP-END FED
2=BOTTOM-END FED

Z: INPUT CORD LENGTH
A=1 METER
B=2 METER
C=3 METER

PLUG/RECEPTACLE BLOCK



PLUG
NEMA L15-30P, 3P 4W
30A, 250V, 3-PHASE MAX RATED INPUT
24A DERATED



RECEPTACLES
IEC 60320/C19
16A, 250V MAX RATED OUTPUT



RECEPTACLES
IEC 60320/C13
10A, 250V MAX RATED OUTPUT

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
02A	06/07/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT	P24E29M
01A	10/10/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P24E29M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN DATE PRINT	
TITLE INTELLIGENT SERIES PDU P24E29M-XXYZ CUSTOMER DRAWING			
ITEM REVISION NAME:		PANDUIT	
DATASHEET FILE NAME:		MATERIAL/COLOR: N/A	
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		DRAWING NUMBER: P24E29M_DC	
THIRD ANGLE PROJECTION		Tolerance(mm) 0<L≤50 ±0.5 50<L≤250 ±1.0 250<L≤500 ±1.5 500<L≤1000 ±2.5 1000<L≤2000 ±4.0	
DRAWN BY GEORGE	DATE 10/10/2017	CHK SEAN	SCALE NONE
SHT 1 OF 2		SCALE B	

2



1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P24E29M	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 200-240V/30A/3 PHASE DELTA, TOP-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM/-127MM) 10'(+10"/-5")	9.4kg
P24E29M-BL1A	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM/-89MM) 3.3'(+3.5"/-1.75")	8.6kg
P24E29M-BL1B	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM/-89MM) 6.5'(+7"/-3.5")	9.0kg
P24E29M-RD1A	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM/-89MM) 3.3'(+3.5"/-1.75")	8.6kg
P24E29M-RD1B	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM/-89MM) 6.5'(+7"/-3.5")	9.0kg
P24E29M-RD1C	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM/-127MM) 10'(+10"/-5")	9.4kg
P24E29M-WH1A	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM/-89MM) 3.3'(+3.5"/-1.75")	8.6kg
P24E29M-WH1B	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM/-89MM) 6.5'(+7"/-3.5")	9.0kg
P24E29M-WH1C	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM/-127MM) 10'(+10"/-5")	9.4kg
P24E29M-YL1A	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM/-89MM) 3.3'(+3.5"/-1.75")	8.6kg
P24E29M-YL1B	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM/-89MM) 6.5'(+7"/-3.5")	9.0kg
P24E29M-YL1C	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM/-127MM) 10'(+10"/-5")	9.4kg
P24E29M-BU1A	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM/-89MM) 3.3'(+3.5"/-1.75")	8.6kg
P24E29M-BU1B	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM/-89MM) 6.5'(+7"/-3.5")	9.0kg
P24E29M-BU1C	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM/-127MM) 10'(+10"/-5")	9.4kg
P24E29M-GN1A	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM/-89MM) 3.3'(+3.5"/-1.75")	8.6kg
P24E29M-GN1B	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM/-89MM) 6.5'(+7"/-3.5")	9.0kg
P24E29M-GN1C	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM/-127MM) 10'(+10"/-5")	9.4kg
P24E29M-BL2A	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM/-89MM) 3.3'(+3.5"/-1.75")	8.6kg
P24E29M-BL2B	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM/-89MM) 6.5'(+7"/-3.5")	9.0kg
P24E29M-BL2C	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM/-127MM) 10'(+10"/-5")	9.4kg
P24E29M-RD2A	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM/-89MM) 3.3'(+3.5"/-1.75")	8.6kg
P24E29M-RD2B	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM/-89MM) 6.5'(+7"/-3.5")	9.0kg
P24E29M-RD2C	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM/-127MM) 10'(+10"/-5")	9.4kg
P24E29M-WH2A	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM/-89MM) 3.3'(+3.5"/-1.75")	8.6kg
P24E29M-WH2B	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM/-89MM) 6.5'(+7"/-3.5")	9.0kg
P24E29M-WH2C	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM/-127MM) 10'(+10"/-5")	9.4kg
P24E29M-YL2A	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM/-89MM) 3.3'(+3.5"/-1.75")	8.6kg
P24E29M-YL2B	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM/-89MM) 6.5'(+7"/-3.5")	9.0kg
P24E29M-YL2C	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM/-127MM) 10'(+10"/-5")	9.4kg
P24E29M-BU2A	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM/-89MM) 3.3'(+3.5"/-1.75")	8.6kg
P24E29M-BU2B	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM/-89MM) 6.5'(+7"/-3.5")	9.0kg
P24E29M-BU2C	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM/-127MM) 10'(+10"/-5")	9.4kg
P24E29M-GN2A	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM/-89MM) 3.3'(+3.5"/-1.75")	8.6kg
P24E29M-GN2B	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM/-89MM) 6.5'(+7"/-3.5")	9.0kg
P24E29M-GN2C	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM/-127MM) 10'(+10"/-5")	9.4kg

B

B

A

A

							WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN				
									DATE				
									PRINT				
							TITLE						
							INTELLIGENT SERIES PDU P24E29M-XXYZ CUSTOMER DRAWING						
							ITEM REVISION NAME:						
							DATASHEET FILE NAME:						
02A	06/07/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT	P24E29M	UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR:				
01A	10/10/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P24E29M	THIRD ANGLE PROJECTION		N/A				
							Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0		DRAWING NUMBER:				
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY	DATE	CHK	SCALE	SHT 2 OF 2		SCALE
							GEORGE	10/10/2017	SEAN	NONE			B

2



1