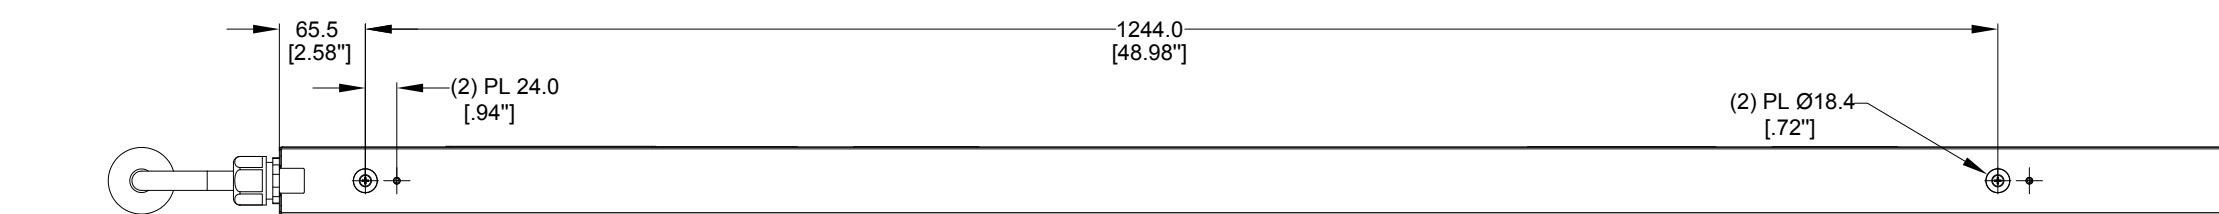
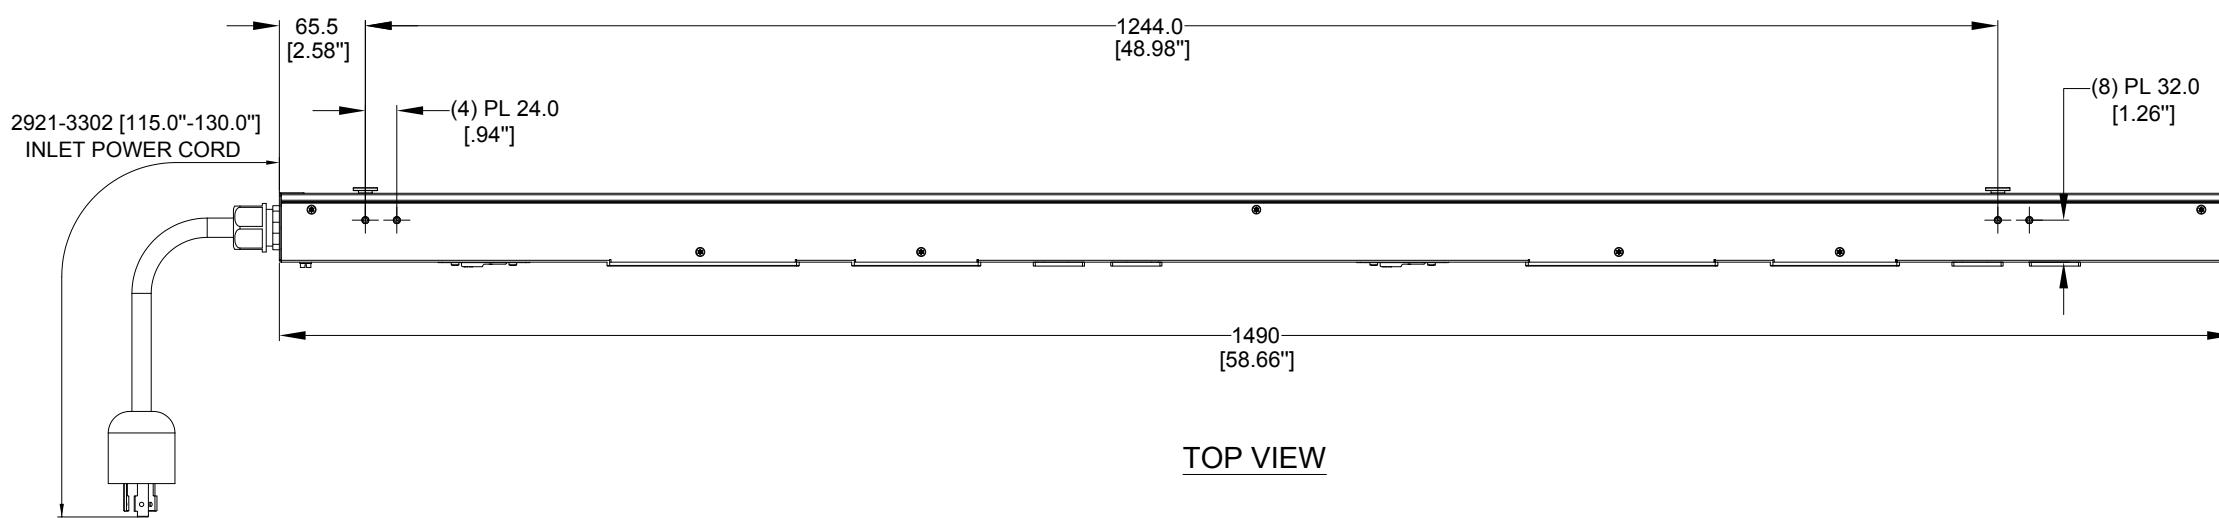



|             |        |
|-------------|--------|
| PANDUIT P/N | WEIGHT |
| P24B15M     | 4.6kg  |

B

REAR VIEWTOP VIEWFRONT VIEW


20 AMP, DOUBLE - POLE ELECTRO-MECHANICAL SWITCH / BREAKER (2) PLACES

A

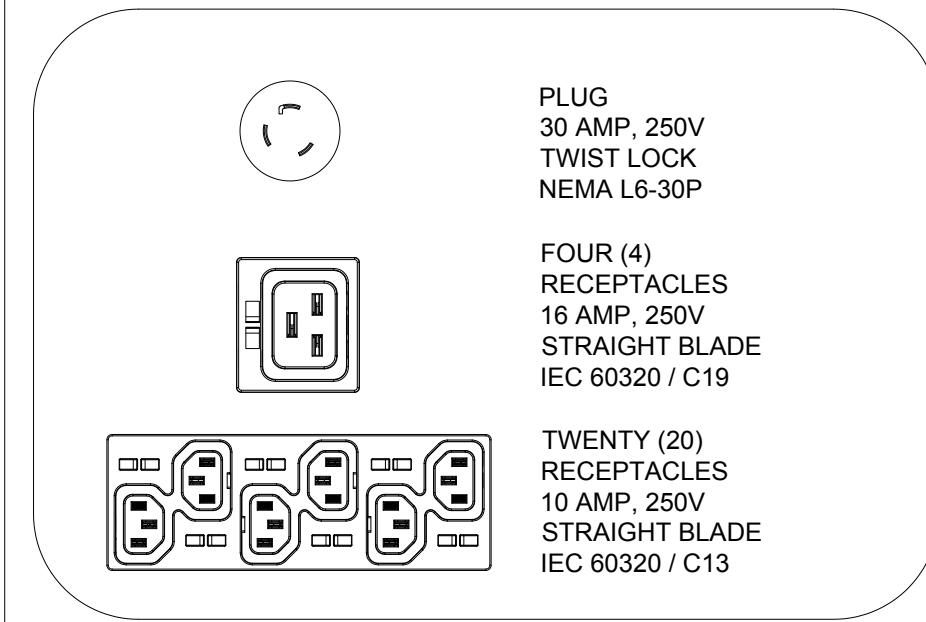

## NOTES:

1. IDENTIFICATION:  
 UNIT TYPE: BASIC  
 ORIENTATION: VERTICAL, MID  
 OUTLET QTY&TYPE: (20) C13, (4) C19  
 BREAKER QTY&TYPE: (2) 20A, DOUBLE-POLE  
 INPUT VOLTAGE: 200-240VAC  
 INPUT CURRENT: 30A (24A DERATED)  
 INPUT PHASE: SINGLE PHASE  
 RATED POWER: 5.0kVA  
 INPUT PLUG: NEMA L6-30P  
 INPUT CORD LENGTH: 3m [10']
2. ACCESSORIES:  
 POCKET GUIDE
3. RoHS COMPLIANT
4. VISIT PANDUIT'S ON-LINE CATALOG AT WWW.PANDUIT.COM FOR ADDITIONAL PRODUCT INFORMATION CONTAINED IN THE SPECIFICATION SHEET AS WELL AS A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
5. MAXIMUM ALLOWABLE INPUT POWER = 5.0kW
6. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES

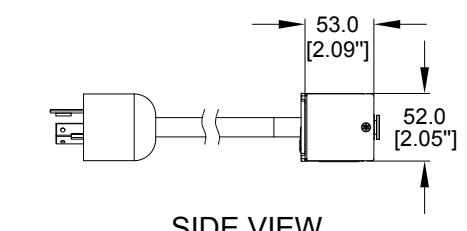SIDE VIEW

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX.  
THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY

SIGN  
DATE  
PRINT

|  |               |  |                                      |
|--|---------------|--|--------------------------------------|
| TITLE  |               | BASIC SERIES PDU   |                                      |
| ITEM REVISION NAME   |               | P24B15M  |                                      |
| DATASHEET FILE NAME:   |               | CUSTOMER DRAWING   |                                      |
| UNLESS OTHERWISE SPECIFIED<br>DIMENSIONAL TOLERANCE ARE: mm [IN] |               | MATERIAL/COLOR:  |                                      |
| THIRD ANGLE PROJECTION   | Tolerance(mm) | 0≤L≤50<br>50≤L≤250<br>250≤L≤500<br>500≤L≤1000<br>1000≤L≤2000 | ±0.5<br>±1.0<br>±1.5<br>±2.5<br>±4.0 |
| REV  | DATE          | BY   | CHK APR                              |
| 01B  | 08/21/2017    | KUN  | MIM                                  |
| 01A  | 06/28/2017    | KUN  | MIM                                  |
| REvised TOLERANCES   |               | P24B15M  |                                      |
| INITIAL RELEASE  |               | P24B15M  |                                      |
| DESCRIPTION  | ECN           | DRAWN BY   | DATE                                 |
|  |               | KUN  | 05/24/2017                           |
|  |               | CHK  | SEAN                                 |
|  |               | SCALE  | NONE                                 |
|  |               | SHT 1 OF 1   | B                                    |