



Material	High Conductivity Seamless Copper Tube
Plating	Electro-Tin
Wire Size	1/0 AWG
Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric
Wire Strip Length	1.0 in.
Stud Size	1/4 in.
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.
UL Temperature Rating	90° C
C.S.A Certified Wire Connector	Yes
Panduit Color Code on Barrel	PINK
Panduit Die Index No. on Barrel	P42
Alternate Industry Die Index No. () on Barrel	(12)

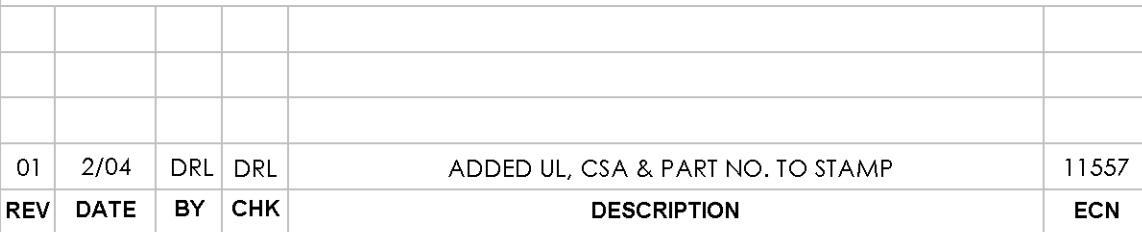

Technical drawing of a Panduit connector showing dimensions and labels:

- Overall height: $.76 \pm .04$
- Base width: $.32 \pm .04$
- Main body width: $.63 \pm .02$
- Tip width: $.27 \pm .02$ DIA (2) PLS
- Labels: PANDUIT, 1/0 STR CU, LCD10-14AF
- Wire inspection window

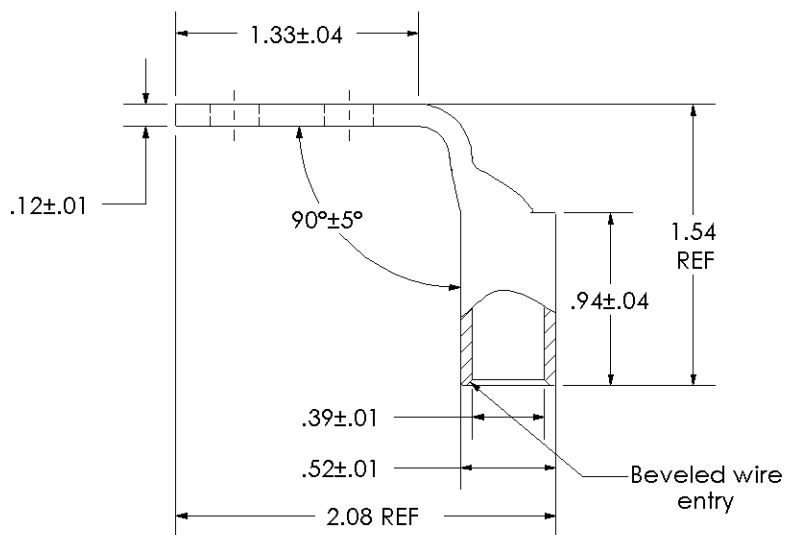

PANDUIT CORP. TINLEY PARK, ILLINOIS

LCD1/0-14AF-X
Copper Lug - Two-Hole, Standard Barrel, 90° Angle Tongue

SCALE N/A	DRAWING NO / CAD FILE LCD1_0-14AF-CUST
---------------------	--