


PANDUIT P/N	WEIGHT
P24F04M-XXYZ	SEE SHEET 2


1. STANDARD:	
UNIT TYPE:	MONITORED OUTLET
ORIENTATION:	VERTICAL, 0U FULL
OUTLET QTY & TYPE:	(12)C13, (12) C19
INPUT VOLTAGE:	200-240VAC
INPUT CURRENT:	50A (40A DERATED)
BREAKER QTY & TYPE:	(6)20AMP, DOUBLE-POLE
INPUT PHASE:	THREE-PHASE DELTA
RATED POWER:	14.4kVA
INPUT PLUG:	CS8365C
INPUT POWER CORD:	SEE SHEET 2 FOR PART NUMBER TABLE
REGULATORY STANDARD:	RoHS COMPLIANT


3. ACCESSORIES:
(1) QUICK-START GUIDE

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES]
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE
SHEET 2 CONFIGURABLE PART NUMBERS: P24F04M-XX Y Z

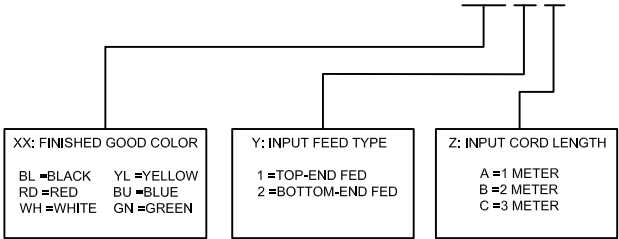

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY				SIGN DATE PRINT	
TITLE INTELLIGENT SERIES PDU P24F04M-XXYZ CUSTOMER DRAWING					
ITEM REVISION NAME:					
DATASHEET FILE NAME:					
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]				MATERIAL/COLOR:	
 THIRD ANGLE PROJECTION				N/A	
Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0				DRAWING NUMBER: P24F04M_DC	
DRAWN BY GEORGE	DATE 08/23/2017	CHK SEAN	SCALE NONE	SHT 1 OF 2	
				SCALE B	

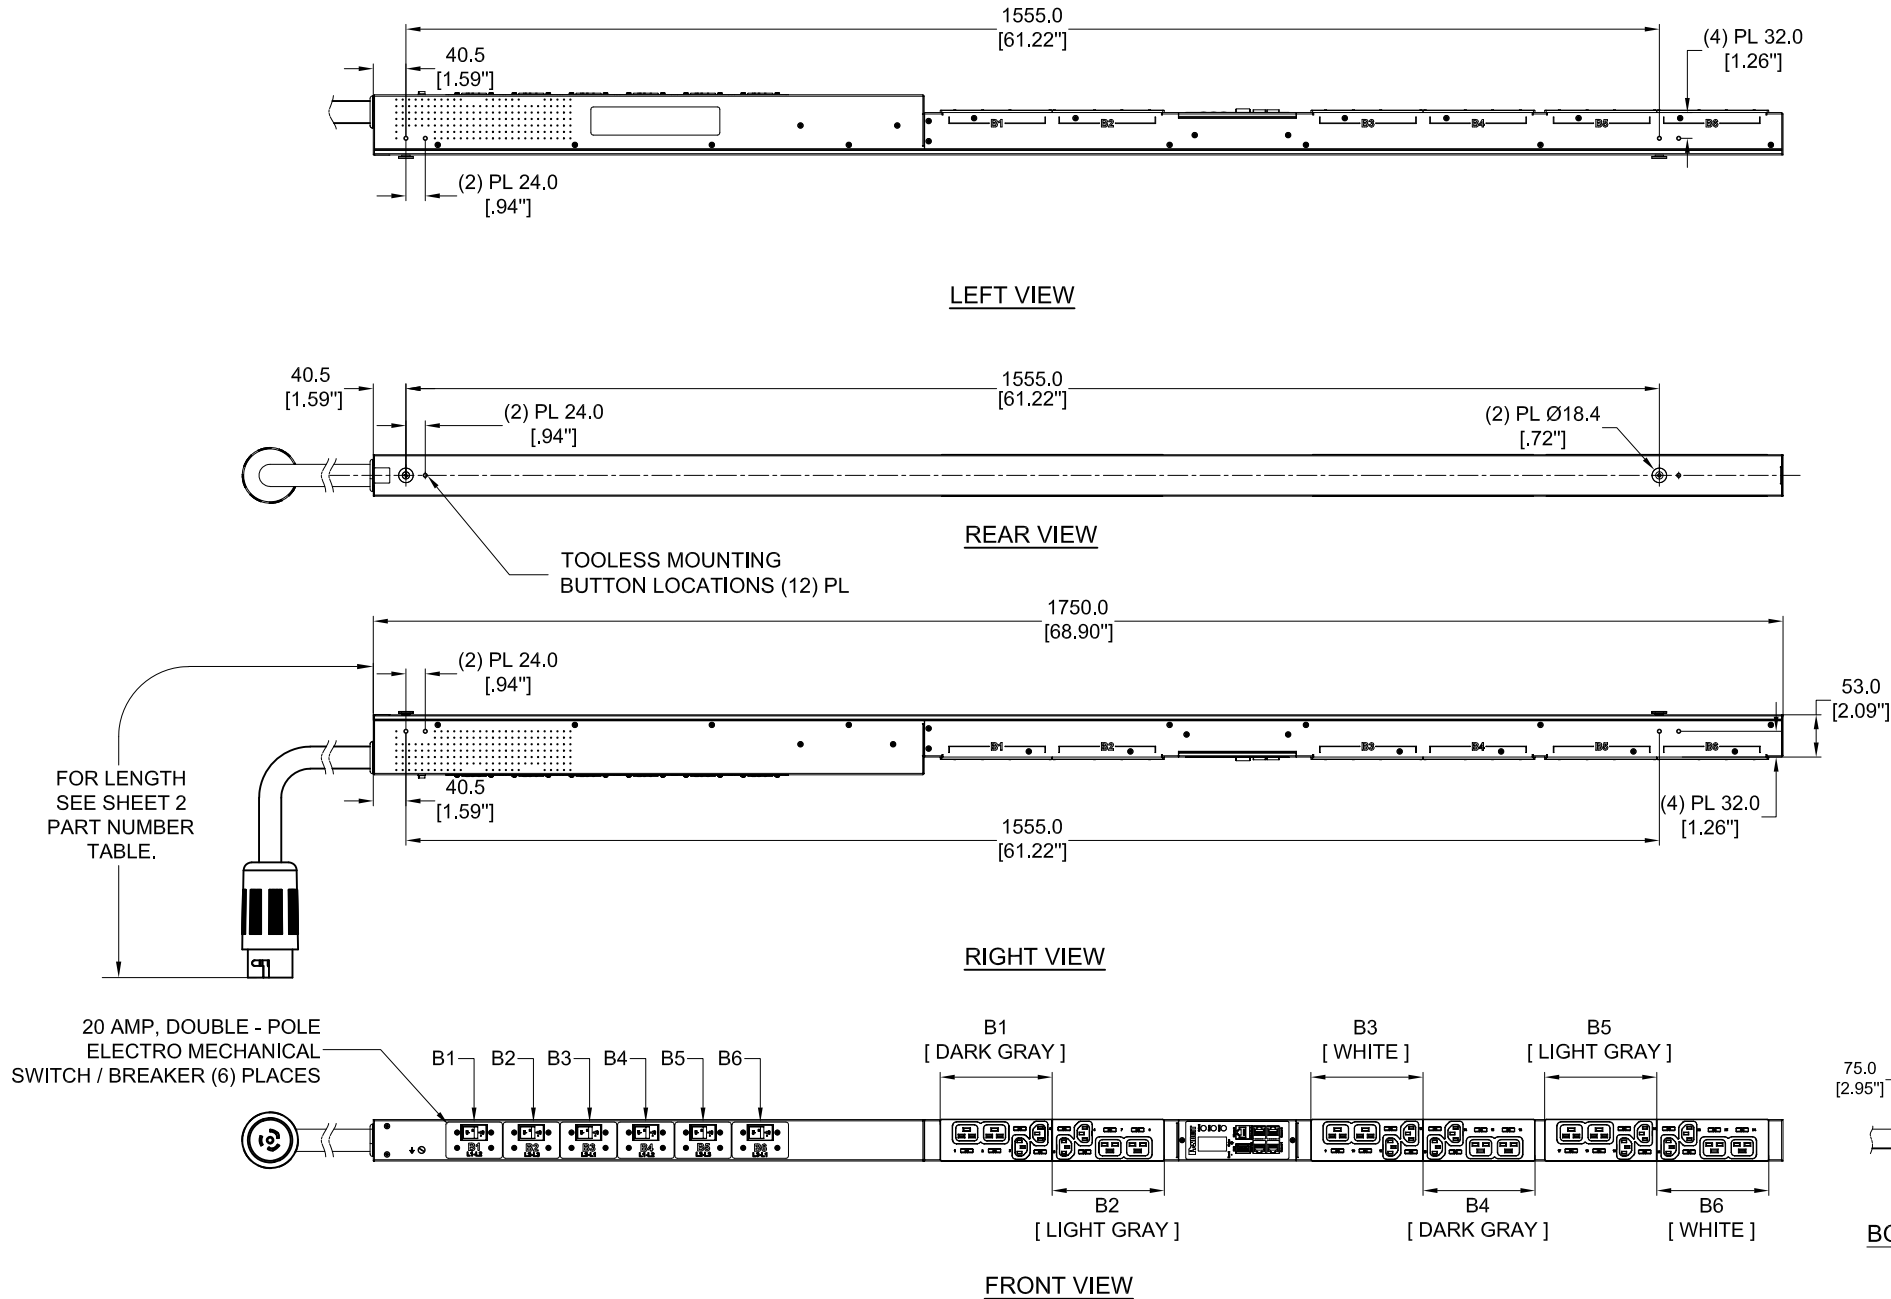

PLUG
CS8365C, 3P 4W
50A, 250V, 3-PHASE DELTA MAX RATED INPUT
40A DERATED



RECEPTACLES
IEC 60320/C19
16A, 250V MAX RATED OUTPUT



RECEPTACLES
IEC 60320/C13
10A, 250V MAX RATED OUTPUT

02A	06/07/2018	JF.YU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT	P24F04M
01A	08/23/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P24F04M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P24F04M	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET ,200-240V/50A/THREE-PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM/-127MM) 10'[+10"/-5"]	13.7kg
P24F04M-BL1A	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET ,200-240V/50A/THREE-PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM/-89MM) 3.3'[+3.5"/-1.75"]	11.1kg
P24F04M-BL1B	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET ,200-240V/50A/THREE-PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM/-89MM) 6.5'[+7"/-3.5"]	12.4kg
P24F04M-RD1A	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240V/50A/THREE-PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM/-89MM) 3.3'[+3.5"/-1.75"]	11.1kg
P24F04M-RD1B	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240V/50A/THREE-PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM/-89MM) 6.5'[+7"/-3.5"]	12.4kg
P24F04M-RD1C	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240V/50A/THREE-PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM/-127MM) 10'[+10"/-5"]	13.7kg
P24F04M-WH1A	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240V/50A/THREE-PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM/-89MM) 3.3'[+3.5"/-1.75"]	11.1kg
P24F04M-WH1B	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240V/50A/THREE-PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM/-89MM) 6.5'[+7"/-3.5"]	12.4kg
P24F04M-WH1C	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240V/50A/THREE-PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM/-127MM) 10'[+10"/-5"]	13.7kg
P24F04M-YL1A	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240V/50A/THREE-PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM/-89MM) 3.3'[+3.5"/-1.75"]	11.1kg
P24F04M-YL1B	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240V/50A/THREE-PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM/-89MM) 6.5'[+7"/-3.5"]	12.4kg
P24F04M-YL1C	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240V/50A/THREE-PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM/-127MM) 10'[+10"/-5"]	13.7kg
P24F04M-BU1A	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240V/50A/THREE-PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM/-89MM) 3.3'[+3.5"/-1.75"]	11.1kg
P24F04M-BU1B	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240V/50A/THREE-PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM/-89MM) 6.5'[+7"/-3.5"]	12.4kg
P24F04M-BU1C	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240V/50A/THREE-PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM/-127MM) 10'[+10"/-5"]	13.7kg
P24F04M-GN1A	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240V/50A/THREE-PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM/-89MM) 3.3'[+3.5"/-1.75"]	11.1kg
P24F04M-GN1B	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240V/50A/THREE-PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM/-89MM) 6.5'[+7"/-3.5"]	12.4kg
P24F04M-GN1C	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240V/50A/THREE-PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM/-127MM) 10'[+10"/-5"]	13.7kg
P24F04M-BL2A	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240V/50A/THREE-PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM/-89MM) 3.3'[+3.5"/-1.75"]	11.1kg
P24F04M-BL2B	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240V/50A/THREE-PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM/-89MM) 6.5'[+7"/-3.5"]	12.4kg
P24F04M-BL2C	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240V/50A/THREE-PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM/-127MM) 10'[+10"/-5"]	13.7kg
P24F04M-RD2A	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240V/50A/THREE-PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM/-89MM) 3.3'[+3.5"/-1.75"]	11.1kg
P24F04M-RD2B	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240V/50A/THREE-PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM/-89MM) 6.5'[+7"/-3.5"]	12.4kg
P24F04M-RD2C	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240V/50A/THREE-PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM/-127MM) 10'[+10"/-5"]	13.7kg
P24F04M-WH2A	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240V/50A/THREE-PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM/-89MM) 3.3'[+3.5"/-1.75"]	11.1kg
P24F04M-WH2B	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240V/50A/THREE-PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM/-89MM) 6.5'[+7"/-3.5"]	12.4kg
P24F04M-WH2C	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240V/50A/THREE-PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM/-127MM) 10'[+10"/-5"]	13.7kg
P24F04M-YL2A	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240V/50A/THREE-PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM/-89MM) 3.3'[+3.5"/-1.75"]	11.1kg
P24F04M-YL2B	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240V/50A/THREE-PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM/-89MM) 6.5'[+7"/-3.5"]	12.4kg
P24F04M-YL2C	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240V/50A/THREE-PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM/-127MM) 10'[+10"/-5"]	13.7kg
P24F04M-BU2A	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240V/50A/THREE-PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM/-89MM) 3.3'[+3.5"/-1.75"]	11.1kg
P24F04M-BU2B	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240V/50A/THREE-PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM/-89MM) 6.5'[+7"/-3.5"]	12.4kg
P24F04M-BU2C	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240V/50A/THREE-PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM/-127MM) 10'[+10"/-5"]	13.7kg
P24F04M-GN2A	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240V/50A/THREE-PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM/-89MM) 3.3'[+3.5"/-1.75"]	11.1kg
P24F04M-GN2B	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240V/50A/THREE-PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM/-89MM) 6.5'[+7"/-3.5"]	12.4kg
P24F04M-GN2C	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240V/50A/THREE-PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM/-127MM) 10'[+10"/-5"]	13.7kg

B




A

B



A

							DELIVERY					
							INTELLIGENT SERIES PDU P24F04M-XXYZ CUSTOMER DRAWING					
							ITEM REVISION NAME:					
							DATASHEET FILE NAME:					
							UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR:			
02A	06/07/2018	JF.YU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT	P24F04M	 THIRD ANGLE PROJECTION Tolerance(mm) 04<50 ±0.5 50<250 ±1.0 250<500 ±1.5 500<1000 ±2.5 1000<L<2000 ±4.0		N/A			
01A	08/23/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P24F04M			DRAWING NUMBER: P24F04M_DC			
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY GEORGE	DATE 08/23/2017	CHK SEAN	SCALE NONE	SHT 2 OF 2	SCALE B

