




Multi-Tap Connector with Clear Insulation, Single-Sided, with Mounting Holes

For Use with Aluminum or Copper Code Conductors

Type PCSBMT-S

- Flexible design – can be used as a tap, splice, or dead end connector
- Body made from high strength, extruded aluminum alloy to provide premium electrical and mechanical performance
- Two isolated mounting holes at either end of connector facilitate direct mounting using 1/4" bolts
- Insulated with clear PVC to eliminate the need for taping and allow for visual inspection of the complete conductor insertion
- Each port pre-filled with oxide inhibiting joint compound seals out air and moisture to deter surface oxidation
- Wide wire range-taking capability minimizes inventory requirements
- Plated steel or aluminum set screw provides high strength, durable electrical contact between conductor and connector
- UL Listed and CSA Certified for use up to 600 V and temperature rated 90°C

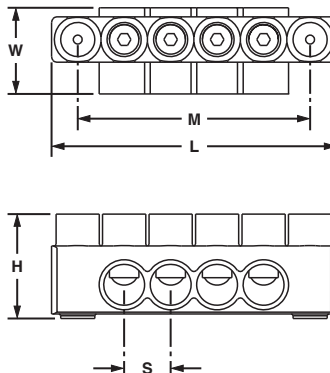

Part Number	Conductor Size Range	No. of Ports	Figure Dimensions (In.)					Mounting Hole Size (In.)	Hex Key Size (In.)	Std. Pkg. Qty.
			L	W	H	S	M			
PCSBMT2/0-4S-3Y	2/0 – #14 AWG STR #10 – #14 AWG SOL	4	4.20	1.31	1.50	0.67	3.61	1/4	1/2	3
PCSBMT2/0-6S-2Y		6	5.55	1.31	1.50	0.67	4.96	1/4	1/2	2
PCSBMT2/0-8S-2Y		8	6.89	1.31	1.50	0.67	6.30	1/4	1/2	2
PCSBMT2/0-10S2Y		10	8.24	1.31	1.50	0.67	7.65	1/4	1/2	2
PCSBMT2/0-12S1Y		12	9.58	1.31	1.50	0.67	8.99	1/4	1/2	1
PCSBMT250-4S-2Y	250 kcmil – #10 AWG STR	4	5.78	2.00	2.25	0.94	4.94	1/4	23/32	2
PCSBMT250-6S-2Y		6	7.66	2.00	2.25	0.94	6.82	1/4	23/32	2
PCSBMT250-8S-2Y		8	9.53	2.00	2.25	0.94	8.69	1/4	23/32	2
PCSBMT250-10S2Y		10	11.41	2.00	2.25	0.94	10.57	1/4	23/32	2
PCSBMT250-12S1Y	350 kcmil – #10 AWG STR	12	13.29	2.00	2.25	0.94	12.45	1/4	23/32	1
PCSBMT350-4S-2Y		4	6.17	2.25	2.63	1.00	5.25	1/4	7/8	2
PCSBMT350-6S-2Y		6	8.17	2.25	2.63	1.00	7.25	1/4	7/8	2
PCSBMT350-8S-2Y		8	10.17	2.25	2.63	1.00	9.25	1/4	7/8	2
PCSBMT350-10S1Y	600 kcmil – #6 AWG STR	10	12.17	2.25	2.63	1.00	11.25	1/4	7/8	1
PCSBMT350-12S1Y		12	14.17	2.25	2.63	1.00	13.25	1/4	7/8	1
PCSBMT600-4S-2Y		4	7.84	2.25	2.88	1.28	6.65	1/4	15/16	2
PCSBMT600-6S-2Y		6	10.41	2.25	2.88	1.28	9.22	1/4	15/16	2
PCSBMT600-8S-2Y		8	12.97	2.25	2.88	1.28	11.78	1/4	15/16	2
PCSBMT600-10S1Y		10	15.53	2.25	2.88	1.28	14.34	1/4	15/16	1
PCSBMT600-12S1Y		12	18.09	2.25	2.88	1.28	16.90	1/4	15/16	1