




THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

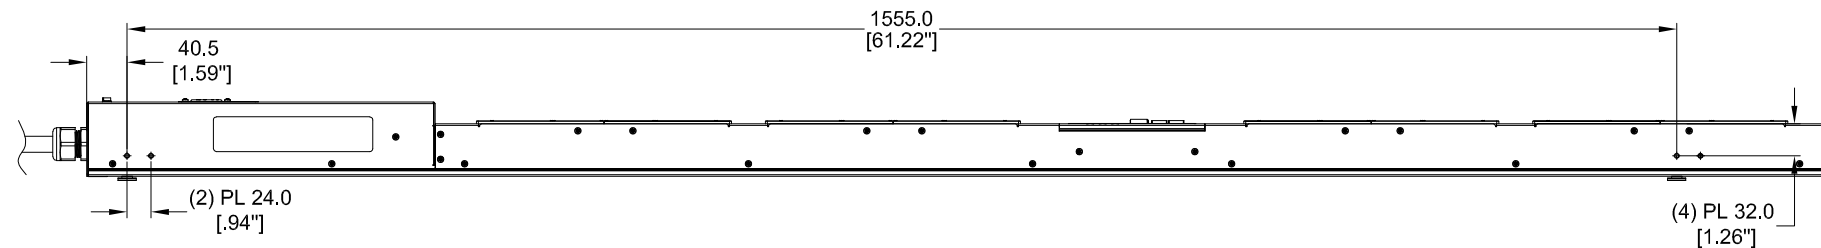


LEFT VIEW

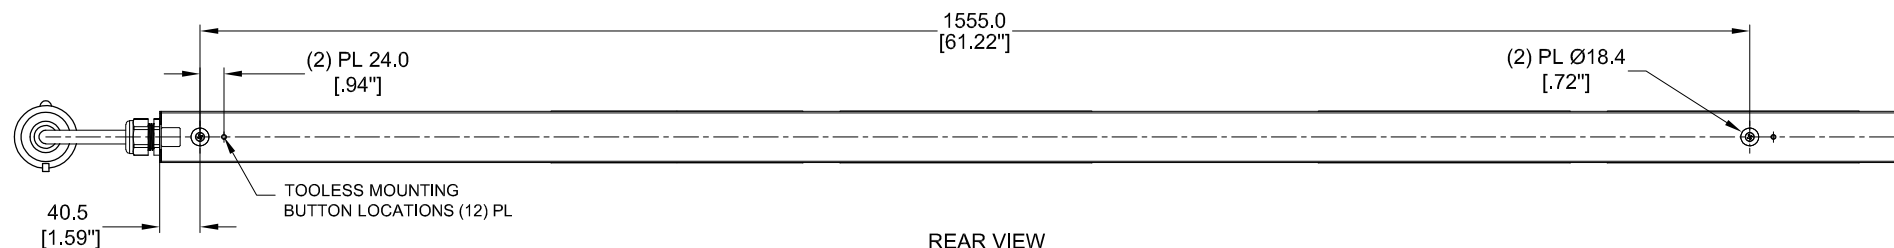


REAR VIEW

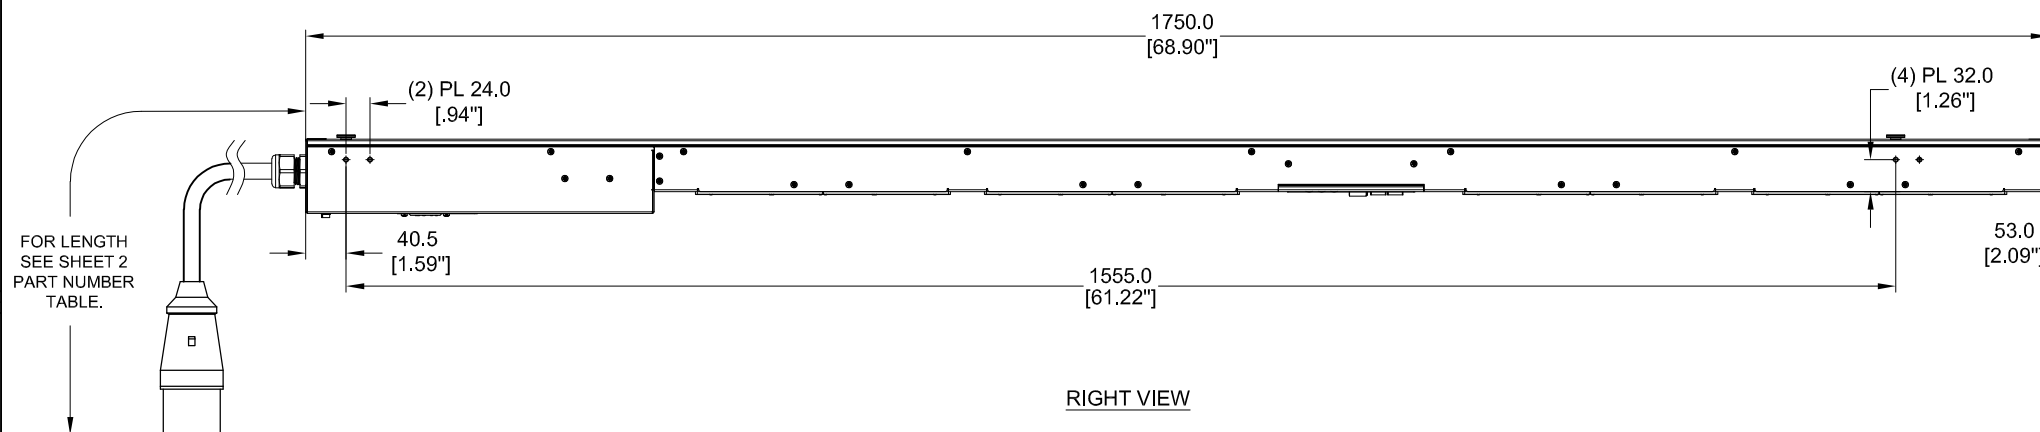

RIGHT VIEW

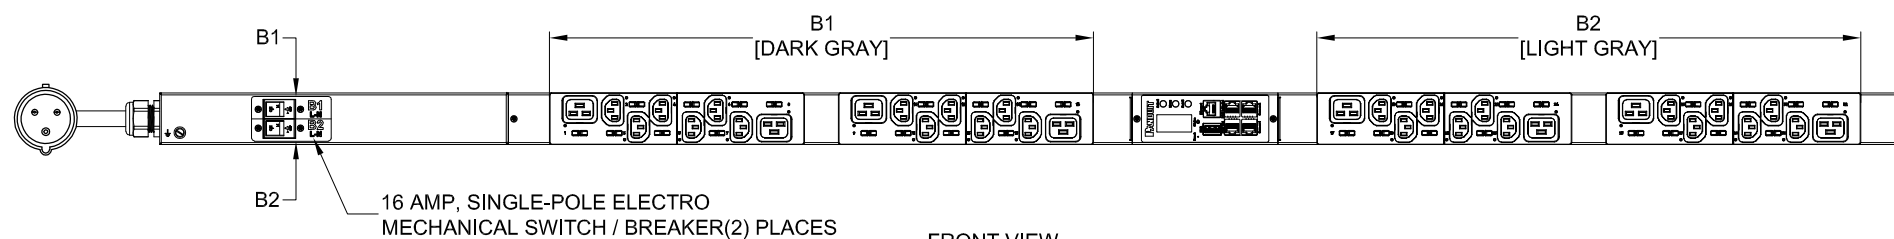

FRONT VIEW

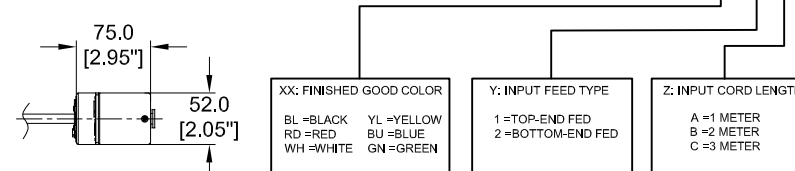

BOTTOM VIEW

XX: FINISHED GOOD COLOR
BL=BLACK YL=YELLOW
RD=RED BU=BLUE
WH=WHITE GN=GREEN

Y: INPUT FEED TYPE
1=TOP-END FED
2=BOTTOM-END FED

Z: INPUT CORD LENGTH
A=1 METER
B=2 METER
C=3 METER

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN	
		DATE	
		PRINT	
TITLE INTELLIGENT SERIES PDU P32E06M-XXYZ CUSTOMER DRAWING			
ITEM REVISION NAME:		PANDUIT	
DATASHEET FILE NAME:			
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR: N/A	
Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0		DRAWING NUMBER: P32E06M_DC	
DRAWN BY GEORGE	DATE 07/31/2017	CHK SEAN	SCALE NONE
SHT 1 OF 2		SCALE B	

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
03A	06/07/2018	H.XU	MIM	JAWI	ADDED 'BOTTOM-END FED' CONFIGURABLE PART NUMBER TO SHEET 2 TABLE AND DESCRIPTION. UPDATED IDENTIFICATION TO INCLUDE 'BOTTOM-END FED' IN CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT	P32E06M
02A	02/24/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER	P32E06M
01B	12/14/2017	GEORGE	MIM	EDM	UPDATED DESCRIPTION	P32E06M
01A	07/31/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P32E06M



PLUG
IEC 60309, 2P 3W, 6H
IP44 (SPLASHPROOF)
32A, 200-250V MAX RATED INPUT



RECEPTACLES
IEC 60320/C19
16A, 250V MAX RATED OUTPUT



RECEPTACLES
IEC 60320/C13
10A, 250V MAX RATED OUTPUT



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P32E06M	VERTICAL,(24) C13,(8) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10'[*+10"/-5"]	6.5kg
P32E06M-BL1A	VERTICAL,(24) C13,(8) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM-89MM) 3.3'[*+3.5"/-1.75"]	5.9kg
P32E06M-BL1B	VERTICAL,(24) C13,(8) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM-89MM) 6.5'[*+7"/-3.5"]	6.2kg
P32E06M-RD1A	VERTICAL,(24) C13,(8) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM-89MM) 3.3'[*+3.5"/-1.75"]	5.9kg
P32E06M-RD1B	VERTICAL,(24) C13,(8) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM-89MM) 6.5'[*+7"/-3.5"]	6.2kg
P32E06M-RD1C	VERTICAL,(24) C13,(8) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM-127MM) 10'[*+10"/-5"]	6.5kg
P32E06M-WH1A	VERTICAL,(24) C13,(8) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM-89MM) 3.3'[*+3.5"/-1.75"]	5.9kg
P32E06M-WH1B	VERTICAL,(24) C13,(8) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM-89MM) 6.5'[*+7"/-3.5"]	6.2kg
P32E06M-WH1C	VERTICAL,(24) C13,(8) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM-127MM) 10'[*+10"/-5"]	6.5kg
P32E06M-YL1A	VERTICAL,(24) C13,(8) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM-89MM) 3.3'[*+3.5"/-1.75"]	5.9kg
P32E06M-YL1B	VERTICAL,(24) C13,(8) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM-89MM) 6.5'[*+7"/-3.5"]	6.2kg
P32E06M-YL1C	VERTICAL,(24) C13,(8) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM-127MM) 10'[*+10"/-5"]	6.5kg
P32E06M-BU1A	VERTICAL,(24) C13,(8) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM-89MM) 3.3'[*+3.5"/-1.75"]	5.9kg
P32E06M-BU1B	VERTICAL,(24) C13,(8) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM-89MM) 6.5'[*+7"/-3.5"]	6.2kg
P32E06M-BU1C	VERTICAL,(24) C13,(8) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM-127MM) 10'[*+10"/-5"]	6.5kg
P32E06M-GN1A	VERTICAL,(24) C13,(8) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM-89MM) 3.3'[*+3.5"/-1.75"]	5.9kg
P32E06M-GN1B	VERTICAL,(24) C13,(8) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM-89MM) 6.5'[*+7"/-3.5"]	6.2kg
P32E06M-GN1C	VERTICAL,(24) C13,(8) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM-127MM) 10'[*+10"/-5"]	6.5kg
P32E06M-BL2A	VERTICAL,(24) C13,(8) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM-89MM) 3.3'[*+3.5"/-1.75"]	5.9kg
P32E06M-BL2B	VERTICAL,(24) C13,(8) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM-89MM) 6.5'[*+7"/-3.5"]	6.2kg
P32E06M-BL2C	VERTICAL,(24) C13,(8) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10'[*+10"/-5"]	6.5kg
P32E06M-RD2A	VERTICAL,(24) C13,(8) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM-89MM) 3.3'[*+3.5"/-1.75"]	5.9kg
P32E06M-RD2B	VERTICAL,(24) C13,(8) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM-89MM) 6.5'[*+7"/-3.5"]	6.2kg
P32E06M-RD2C	VERTICAL,(24) C13,(8) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM-127MM) 10'[*+10"/-5"]	6.5kg
P32E06M-WH2A	VERTICAL,(24) C13,(8) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM-89MM) 3.3'[*+3.5"/-1.75"]	5.9kg
P32E06M-WH2B	VERTICAL,(24) C13,(8) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM-89MM) 6.5'[*+7"/-3.5"]	6.2kg
P32E06M-WH2C	VERTICAL,(24) C13,(8) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM-127MM) 10'[*+10"/-5"]	6.5kg
P32E06M-YL2A	VERTICAL,(24) C13,(8) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM-89MM) 3.3'[*+3.5"/-1.75"]	5.9kg
P32E06M-YL2B	VERTICAL,(24) C13,(8) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM-89MM) 6.5'[*+7"/-3.5"]	6.2kg
P32E06M-YL2C	VERTICAL,(24) C13,(8) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM-127MM) 10'[*+10"/-5"]	6.5kg
P32E06M-BU2A	VERTICAL,(24) C13,(8) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM-89MM) 3.3'[*+3.5"/-1.75"]	5.9kg
P32E06M-BU2B	VERTICAL,(24) C13,(8) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM-89MM) 6.5'[*+7"/-3.5"]	6.2kg
P32E06M-BU2C	VERTICAL,(24) C13,(8) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM-127MM) 10'[*+10"/-5"]	6.5kg
P32E06M-GN2A	VERTICAL,(24) C13,(8) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM-89MM) 3.3'[*+3.5"/-1.75"]	5.9kg
P32E06M-GN2B	VERTICAL,(24) C13,(8) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM-89MM) 6.5'[*+7"/-3.5"]	6.2kg
P32E06M-GN2C	VERTICAL,(24) C13,(8) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM-127MM) 10'[*+10"/-5"]	6.5kg

B

B

A

A

03A	06/07/2018	H.XU	MIM	JAWI	ADDED 'BOTTOM-END FED' CONFIGURABLE PART NUMBER TO SHEET 2 TABLE AND DESCRIPTION. UPDATED IDENTIFICATION TO INCLUDE 'BOTTOM-END FED' IN CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT	P32E06M
02A	02/24/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER	P32E06M
01B	12/14/2017	GEORGE	MIM	EDM	UPDATED DESCRIPTION	P32E06M
01A	07/31/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P32E06M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX.
THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY

SIGN
DATE
PRINT

TITLE
INTELLIGENT SERIES PDU
P32E06M-XXYZ
CUSTOMER DRAWING

ITEM REVISION NAME:
DATASHEET FILE NAME:

UNLESS OTHERWISE SPECIFIED
DIMENSIONAL TOLERANCE ARE: mm [IN]

THIRD ANGLE
PROJECTION

Tolerance(mm)
0<L≤50
50<L≤250
250<L≤500
500<L≤1000
1000<L≤2000

±0.5
±1.0
±1.5
±2.5
±4.0

MATERIAL/COLOR:
N/A
DRAWING NUMBER:
P32E06M_DC

DRAWN BY
GEORGE

DATE
07/31/2017

CHK
SEAN

SCALE
NONE

SHT 2 OF 2

SCALE
B

2

1