



2

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

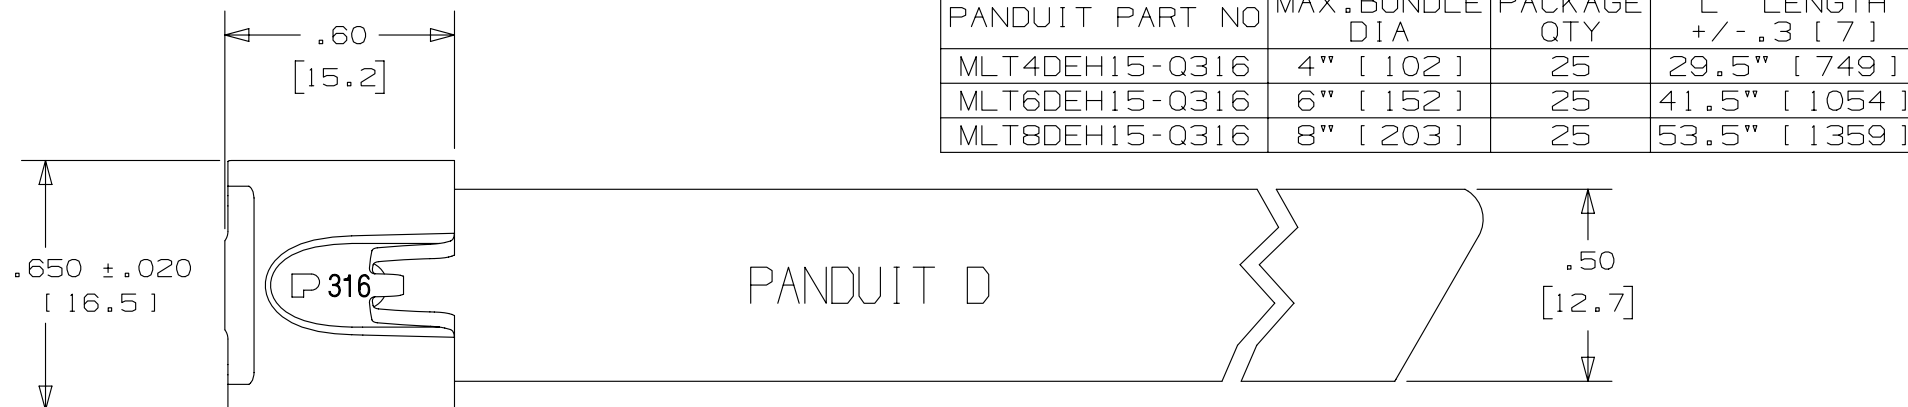

PANDUIT PART NO	MAX. BUNDLE DIA	PACKAGE QTY	"L" LENGTH +/- .3 [7]
MLT4DEH15-Q316	4" [102]	25	29.5" [749]
MLT6DEH15-Q316	6" [152]	25	41.5" [1054]
MLT8DEH15-Q316	8" [203]	25	53.5" [1359]

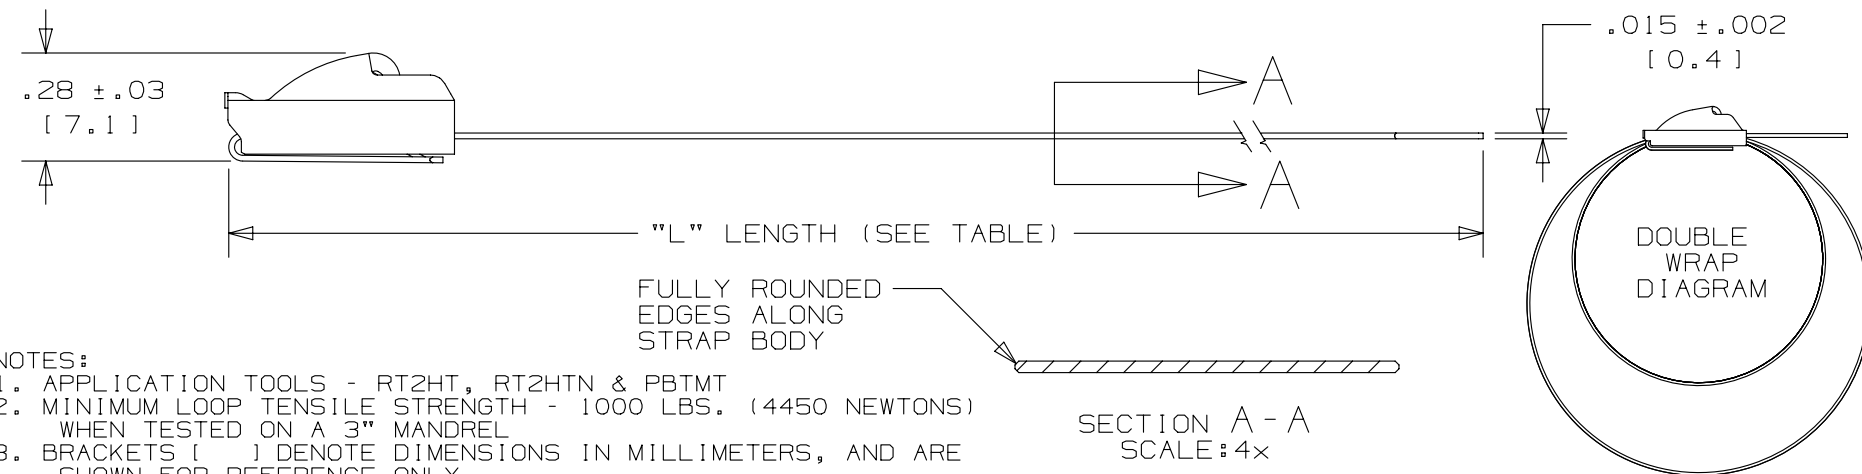


NOTES:

1. APPLICATION TOOLS - RT2HT, RT2HTN & PBTMT
2. MINIMUM LOOP TENSILE STRENGTH - 1000 LBS. (4450 NEWTONS) WHEN TESTED ON A 3" MANDREL
3. BRACKETS [] DENOTE DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
4. TOLERANCES:
 .XXX = ±.010 [.25] .XX = ±.02 [.5]
 .X = ±.03 [.8] ANGLES = ±2°
5. MATERIAL: 316 STAINLESS STEEL

SECTION A - A
SCALE: 4x

BODY WRAPS AROUND TWO TIMES
ENTERING HEAD TWICE
(NOT TO SCALE)

							TITLE METAL LOCKING TIE EXTRA HEAVY DUTY 316 STAINLESS STEEL DOUBLE WRAP						
							CUSTOMER DRAWING						
03A	02/13	JAMB	SKB	RGRO	REMOVED APPLICATION TOOL ST3MT, AND ADDED RT2HTN AND PBTMT UPDATE DRAWING TO NEW PANDUIT GLOBAL TITLE BLOCK WITHPANDUIT LOGO	SSECN01028	ITEM REVISION NAME N41162BS/03						
02A	02/12	MIM	RGRO	---	NOTE 3: METRIC DIMENSIONS NOTED AS BEING SHOWN FOR REFERENCE ONLY	-----	DATASET FILE NAME N41162BS_DC/03A						
01A	10/08	JAMB	SKB	---	ORIG CAD FILE SPEC WAS S41162_01. NOTE 1: APPLICATION TOOL RT1HT REPLACED BY RT2HT	-----	UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .x ± .1 [2.54] .xxx ± .005 [.127] .xx ± .01 [.25] ANGLES ± 5 °			MATERIAL: SEE NOTES			
01	08/04	JAMB	EJD	JJB	Ⓐ REMOVED "AISI NO.5"	11907	 THIRD ANGLE PROJECTION						
00	01/04	JAMB	DPN	JJB	DRAWING RELEASED	11307				DRAWING NUMBER: N41162BS_DC			
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY JAMB	DATE DPN	CHK JJB	SCALE 2:1	SHT 1 OF 1		SIZE A