


2

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

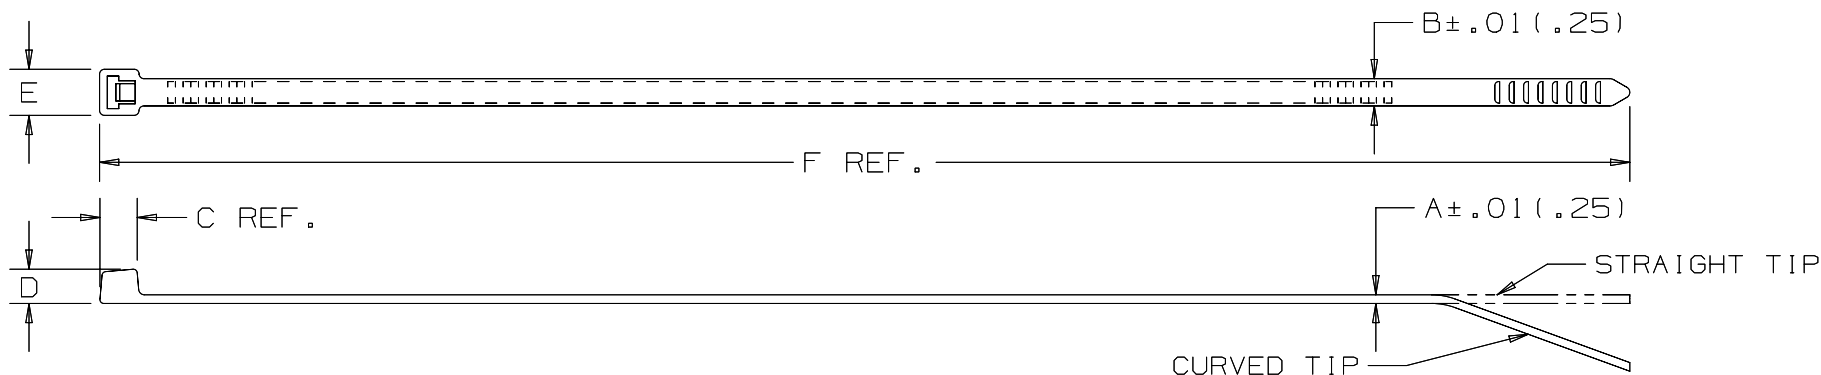

PANDUIT PART NO. *	BUNDLE DIA.		A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	MIN. LOOP TENSILE lbs. (N)	CROSS SECTION	TIP STYLE	WEIGHT lbs./100 pcs. (g)
	MIN. in (mm)	MAX. in (mm)										
PLT1M-79	.13 (3.3)	.87 (22)	.043 (1.1)	.098 (2.5)	.159 (4.0)	.186 (4.7)	.188 (4.8)	4.0 (102)	18 (80)	MINIATURE	CURVED	.09 (42)
PLT2I-79	.13 (3.3)	2.00 (51)	.045 (1.1)	.135 (3.4)	.200 (5.1)	.180 (4.6)	.240 (6.1)	8.0 (203)	25 (111)	INTERMEDIATE	CURVED	.28 (127)
PLT3S-79	.13 (3.3)	3.00 (76)	.059 (1.5)	.190 (4.8)	.260 (6.6)	.240 (6.1)	.320 (8.1)	11.60 (295)	50 (222)	STANDARD	CURVED	.78 (352)

NOTES:

- *1) SEE www.panduit.com FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND PART COLOR.
- 2) MATERIAL HAS A U.L. CONTINUOUS TEMPERATURE RATING OF 338°F (170°C).
- 3) MATERIAL FLAMMABILITY RATING: UL94V-0.
- 4) EXCELLENT RESISTANCE TO MOST CHEMICALS.



TITLE

PREMIUM CABLE TIES PLT ELEVATED TEMPERATURE SERIES

CONTROL DRAWING

ITEM REVISION NAME

W10001DN/03

DATASET FILE NAME

W10001DN/03


UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE: IN [mm]

.x ± ----

.xxx ± .020 (.51)

.xx ± .02 (.51)

ANGLES ± ----

THIRD ANGLE
PROJECTION

MATERIAL:

TEFZEL - FLUOROPOLYMER
COLOR:NATURAL
REG. T.M. OF
E.I. DuPONT
De Nemours CO.

DRAWING NUMBER:

SS-27320

DRAWN BY

DATE

JAB0 6/26/01

CHK

SCALE

SP NONE

SHT 1 OF 1

SIZE

A

2

1

NXGLOBAL-ASIZE