


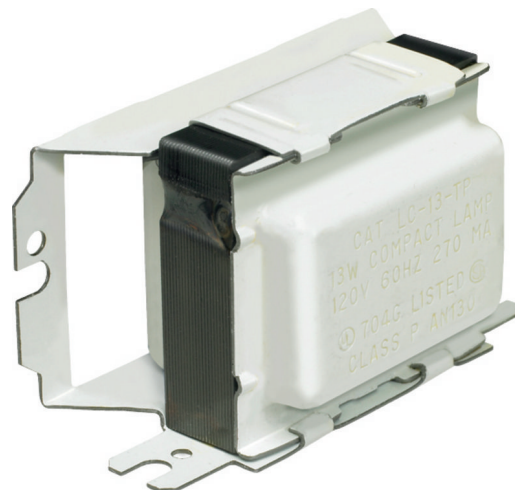

Standard

STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 120V

Available for many fluorescent lamp types sold today, including Preheat, Rapid Start, 2-pin CFL, Slimline, High Output, Very High Output and Circline. Magnetic ballasts can be used in any application where these lamps are used.

Product data


General Information		Rated Lamp Power	
Lamp Type	CFQ13W/GX23	13 W	
Number of Lamps	1 piece/unit		
Lamp Footage	-		
Ballast Type	Magnetic Fluorescent		
Base Model	LC13TP		
Suitable For Outdoor Use	Yes		
Automatic Restart	Yes		
Operating and Electrical			
Input Voltage	120 V		
Input Frequency	60 Hz		
Total Harmonic Distortion USA	15 %		
Ignition Method	Preheat		
Crestfactor (Nom)	1.5		
Ignition Time (Nom)	1 s		
Input Current (Open Circuit)	0		
Input Current (Starting)	1.5		
Ballast Factor (Nom)	0.93		
Power Factor (Nom)	0.49		
Input Current (Nom)	0.27 A		
Input Power (Nom)	16 W		
		Wiring	
		Wire Striplength	0.50/0.375 mm
		Lamp Connection	Series
		Wire Length by Color	See data sheet
		Wire Gauge (Nom)	18AWG mm
		Wire Type	Solid
		Remote Wiring Configuration Allowed	Yes
		Tandem Wiring Configuration Allowed	No
		Through Wiring Configuration Allowed	No
		Max Ballast-Lamp Distance Remote Wiring	30'
		Max Ballast-Lamp Distance Tandem Wiring	-
		Max Ballast-Lamp Distance Through Wiring	-
		Mechanical and Housing	
		Housing Material	Metal
		Housing	C2
		Housing Dimensions	1.06" x 1.59" x 1.81"
		Approval and Application	
		EMC Immunity Standard	FCC Non-Consumer

Standard

Approval Marks	CSA certificate UL certificate RoHS Compliant
Hum And Noise Level	A
UL Recognized	No
Product Data	
Order product name	STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 120V

EAN/UPC - Product	781087048184
Order code	913700507251
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	50
Material Nr. (12NC)	913700507251
Net Weight (Piece)	0.295 kg

Dimensional drawing

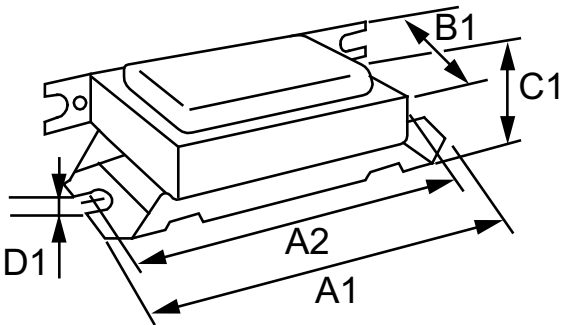

MAG BALLAST (1) 13W COMPACT(2-PIN) 120V

Product	A1	A2	B1	C1	D1
STANDARD MAG BALLAST (1) 13W	3.06 in	2.75 in	1.81 in	1.59 in	0.19 in
COMPACT(2-PIN) 120V					

