



# SPECIFICATION SHEET

## 120-4000



### MADMAX™ BY MAXIMUM SAFETY®

- Synthetic leather palm enhances grip in dry and light oil applications while providing dexterity
- PVC diamond grip on palm and fingertips provides an enhanced grip and extra cut/abrasion resistance
- Foam laminated spandex fabric back for comfort and breathability
- Thermo Plastic Rubber (TPR) molded finger, thumb and back hand guards for maximum protection
- Reinforced thumb crotch for extended glove life, enhanced comfort and increased abrasion resistance
- Airprene wrist is made with breathable neoprene for comfort
- Vented lycra fabric to keep your hands cool
- Synthetic leather upper and heavy lycra fabric bottom fourchettes enhance the natural contour of the glove for a better fit
- Foam padded knuckle protection
- Retail Ready

### APPLICATIONS

- Petrochemical
- Construction
- Auto repair
- Demolition
- Manufacturing
- Mining
- Fabrication
- Landscaping

### CARE INSTRUCTIONS

Machine wash in cold water. Do not bleach. Hang dry; tumble dry is not recommended. Do not iron.

### TECHNICAL DATA

|              |                                                                                                                                                                                                                                                                                                        |                     |                     |                     |                   |                     |
|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|---------------------|---------------------|-------------------|---------------------|
| MATERIAL     | Spandex / Nylon / Polyurethane / Synthetic Leather                                                                                                                                                                                                                                                     |                     |                     |                     |                   |                     |
| CONSTRUCTION | <b>Back:</b> Lime green hi-vis spandex fabric (96% nylon, 4% spandex)<br><b>Palm:</b> Synthetic leather (60% nylon, 40% polyurethane), 0.8mm gauge<br><b>Fingers:</b> Synthetic leather (60% nylon, 40% polyurethane), 0.8mm gauge<br><b>Knuckles:</b> 5mm foam padded <b>Cuff:</b> 3mm nylon airprene |                     |                     |                     |                   |                     |
| COLOR        | Shell: <span style="color: yellow;">■</span> Yellow / Coating: <span style="color: black;">■</span> Black                                                                                                                                                                                              |                     |                     |                     |                   |                     |
| CUFF STYLE   | Open Cuff                                                                                                                                                                                                                                                                                              |                     |                     |                     |                   |                     |
| SIZES        | S - XXXL                                                                                                                                                                                                                                                                                               |                     |                     |                     |                   |                     |
| PACKAGING    | 12 pairs per dozen, 6 dozen per case                                                                                                                                                                                                                                                                   |                     |                     |                     |                   |                     |
| CASE         | 26.5" x 17.2" x 12" / 67.3cm x 43.8cm x 30.5cm                                                                                                                                                                                                                                                         |                     |                     |                     |                   |                     |
| CASE WEIGHT  | S                                                                                                                                                                                                                                                                                                      | M                   | L                   | XL                  | XXL               | XXXL                |
|              | 33.7 lbs<br>15.3 kg                                                                                                                                                                                                                                                                                    | 34.4 lbs<br>15.6 kg | 35.7 lbs<br>16.2 kg | 36.8 lbs<br>16.7 kg | 39 lbs<br>17.7 kg | 39.2 lbs<br>17.8 kg |
| COO          | Pakistan                                                                                                                                                                                                                                                                                               |                     |                     |                     |                   |                     |

### PERFORMANCE PROPERTIES

|             |   |   |   |   |   |   |
|-------------|---|---|---|---|---|---|
| EN388: 3121 |   |   |   |   |   |   |
| ABRASION    | 0 | 1 | 2 | 3 | 4 | - |
| CUT         | 0 | 1 | 2 | 3 | 4 | 5 |
| TEAR        | 0 | 1 | 2 | 3 | 4 | - |
| PUNCTURE    | 0 | 1 | 2 | 3 | 4 | - |

ASTM D3884 Abrasion – Tabor Method = 1,600 cycles +/- 100  
ASTM-D2632 RESILIOMETER TESTING:

|                 |                                        |              |                                                                |
|-----------------|----------------------------------------|--------------|----------------------------------------------------------------|
|                 | YELLOW TPR MOLDINGS<br>ON BACK OF HAND | KNUCKLE AREA | YELLOW/BLACK/ WHITE<br>AREA, TPR MOLDINGS<br>CENTER OF FINGERS |
| AVERAGE READING | 25                                     | 25           | 41.8                                                           |




### BARCODES

| ITEM                                                | PAIR         | DOZEN          | CASE           |
|-----------------------------------------------------|--------------|----------------|----------------|
| <span style="color: yellow;">■</span> 120-4000/S    | 616314069574 | 01616314069573 | 02616314069572 |
| <span style="color: yellow;">■</span> 120-4000/M    | 616314069567 | 01616314069566 | 02616314069565 |
| <span style="color: yellow;">■</span> 120-4000/L    | 616314069550 | 01616314069559 | 02616314069558 |
| <span style="color: yellow;">■</span> 120-4000/XL   | 616314069581 | 01616314069580 | 02616314069589 |
| <span style="color: yellow;">■</span> 120-4000/XXL  | 616314069598 | 01616314069597 | 02616314069596 |
| <span style="color: yellow;">■</span> 120-4000/XXXL | 616314110177 | 01616314110176 | 02616314110175 |

### DIMENSIONS (in/cm)

|          | S           | M           | L           | XL           | XXL          | XXXL       |
|----------|-------------|-------------|-------------|--------------|--------------|------------|
| <b>A</b> | 9.35 / 23.7 | 9.75 / 24.7 | 10.5 / 25.8 | 10.55 / 26.8 | 10.75 / 27.3 | 11 / 27.9  |
| <b>B</b> | 4.05 / 10.3 | 4.3 / 10.9  | 4.55 / 11.6 | 4.8 / 12.2   | 5.08 / 12.9  | 5.3 / 13.5 |

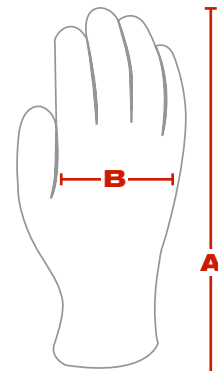

**PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU®**

968 Albany Shaker Road | Latham, NY 12110 | 800-262-5755 | 518-861-0133 | Fax: 518-861-0144 | sales@pipusa.com | www.pipusa.com

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED.