



Mid sized wallpack. All aluminum precision die cast construction with tempered glass refractor. Lamp supplied.

Color: White

Weight: 16.4 lbs

**Project:**

**Type:**

**Prepared By:**

**Date:**

## Lamp Info

Type: 32w Triple  
Watts: 32W  
Shape/Size: N/A  
Base: N/A  
ANSI: N/A  
Hours: 12,000  
Lamp Lumens: 2400  
Efficacy: 75 LPW

## Ballast Info

Type: Elec HPF QT  
120V: 0.31A  
208V: N/A  
240V: N/A  
277V: N/A  
Input Watts: 32W

## Technical Specifications

### Electrical

#### Photocell:

120V Button Photocell Included. Photocell is only compatible with 120V.

#### Listings

#### UL Listing:

Suitable for wet locations. HID fixtures can be wired with 90°C supply wiring if supply wires are routed 3" away from ballast.

### Construction

#### Housing:

Die cast aluminum, 1/2" NPS tapped holes top, both sides and back for conduit or photocontrol. Hinged refractor frame. Continuous silicone rubber gasket.

#### Reflector:

Specular anodized aluminum, removable for installation. Symmetrical light pattern maximizes distance between fixtures.

#### Cutoff Lens:

Tempered glass.

#### Finish:

Formulated for high-durability and long lasting color.

### Optical

#### Refractor:


Prismatic optics designed to minimize glare and throw light down and out. Heat resistant borosilicate glass.

#### Other

#### Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

## Dimensions

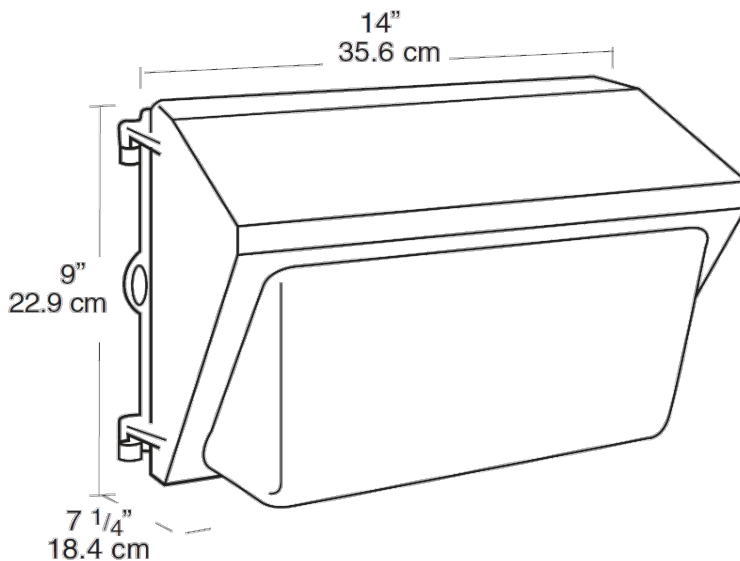

## Features

Precision die cast aluminum housing with durable polyester powder coating

Tempered Glass Refractor

Drilling template for easy box mounting

Silicone gasket remains in place during relamping

Top, side and back conduit openings

Long life lamp included