



Compact Wallpack. UV stabilized, vandal resistant prismatic polycarbonate refractor. Lamp supplied.

Color: Bronze

Weight: 5.7 lbs

**Project:**

**Type:**

**Prepared By:**

**Date:**

#### Lamp Info

Type: 42W Triple  
Watts: 42W  
Shape/Size: N/A  
Base: N/A  
ANSI: N/A  
Hours: 12,000  
Lamp Lumens: 3200  
Efficacy: 70 LPW

#### Ballast Info

Type: Elec HPF QT  
120V: 0.38A  
208V: 0.3A  
240V: 0.2A  
277V: 0.17A  
Input Watts: 46W  
Efficiency: 91%

## Technical Specifications

### Listings

#### UL Listing:

Suitable for wet locations. HID fixtures can be wired with 90°C supply wiring if supply wires are routed 3" away from the ballast.

### Construction

#### Housing:

Die cast aluminum, 1/2" NPS tapped top, both sides and back for conduit or photocontrol. Hinged refractor. Continuous one piece silicone rubber gasket.

#### Reflector:

Semi-Specular anodized aluminum, removable for installation. Symmetrical light pattern maximizes distance between fixtures.

#### Finish:

Formulated for high-durability and long lasting color.

#### Conduit Openings:

Top, side and back.

#### Template:

Drilling template for easy wall box mounting.

#### Ballast Minimum Starting Temperature:

0°F.

#### Other


#### Patents:

Pat. D440,683.

#### Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

## Dimensions

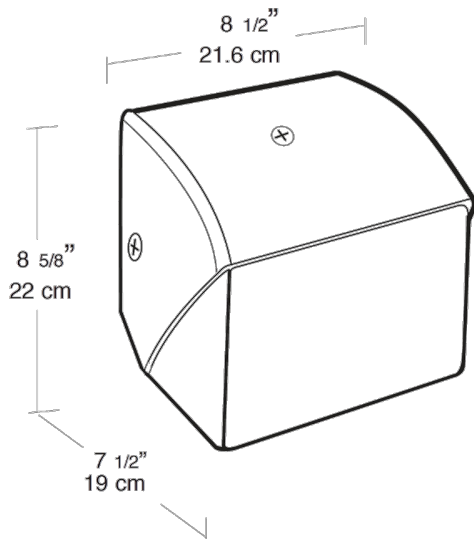

## Features

Precision die cast aluminum housing with durable polyester powder coating

Easy access conduit openings & ballasts for fast internal wiring

Long life lamp included

Silicone gasket remains in place during relamping

Cutoff glare shield for "friendly" lighting

Hinged door swings open and remains captive for easy relamping