



Rugged die cast aluminum 6" diameter housings. Threaded, gasketed clear glass globe for durable weatherproofing and easy relamping. 1" long, 1/2" threaded nipple included for easy mounting. 75 Watt max. Incandescent lamp not supplied. Fluorescent lamp supplied.

Color: Verde green

Weight: 5.5 lbs

Project:

Type:

Prepared By:

Date:

#### Lamp Info

Type: 13W Quad  
 Watts: 13W  
 Shape/Size: N/A  
 Base: N/A  
 ANSI: N/A  
 Hours: 10,000  
 Lamp Lumens: 860  
 Efficacy: 51 LPW

#### Ballast Info

Type: NPF 120V  
 Watts: 0.3A  
 Shape/Size: N/A  
 Base: N/A  
 ANSI: N/A  
 Hours: 17W  
 Input Watts: 17W  
 Efficiency: 76%

## Technical Specifications

### Listings

#### UL Listing:

Suitable for wet locations. Suitable for mounting within 4 feet of the ground.

### Electrical

#### Socket:

Medium base porcelain with all copper electrical parts and 20" leads, including a ground lead.

#### Voltage:

120 volts AC

### Construction

#### Globes:

Threaded, gasketed globe protects against weather, garden sprinklers and insects. Clear glass GL 100 globes standard for 4 Tier. Clear glass GL60 globes standard for 3 Tier. GL100 white globes also available for attractive appearance and glare reduction.

#### Housing:

Die cast aluminum housing with powder coat finish.

#### Mounting Stem:

Optional 12" mounting stem with 1/2" threads on both ends available .

### Optical

#### F13:

Compact Fluorescent 13W.

#### Lamp:

Fluorescent lamp supplied. 13 watt quad tube. NPF 120V ballast.GX23-2 base Quad lamps, 120V.

### Other


#### Recovery Act (ARRA) Complaint:

This product complies with the 52.225-21 "Required Use of American Iron, Steel, and Manufactured Goods-- Buy American Act-- Construction Materials (October 2010).

#### Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

## Dimensions

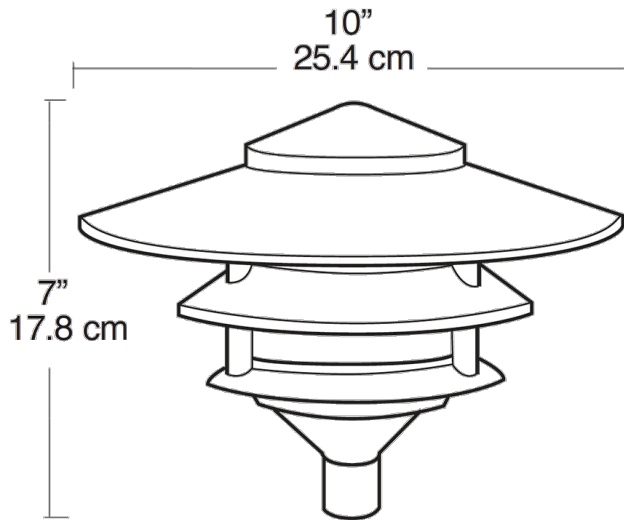

## Features

- Rugged die cast aluminum housing with durable powder coating
- Socket with all copper electrical parts and 20" leads
- Quick and secure installation with one corrosionproof screw
- Threaded, gasketed globes for durable weatherproofing and easy relamping
- 12" color matched mounting stem with 1/2" threads available
- Includes easy mounting 1/2" threaded nipple