



Sensor controlled WP2 Wallpack in 42 Watt CFL cutoff & 84 Watt CFL refractor models. Starting temperature 0°F/-18°C. Sensor has 180° detection and controls up to 250 Watts. 120 volts only. Lamp supplied.

Color: White

Weight: 11.5 lbs

Project:

Type:

Prepared By:

Date:

Lamp Info

Type: 42W Triple
Watts: 42W
Shape/Size: N/A
Base: N/A
ANSI: N/A
Hours: 10,000
Lamp Lumens: 3200
Efficacy: 70 LPW

Ballast Info

Type: Elec HPF QT
120V: 0.38A
208V: N/A
240V: N/A
277V: N/A
Input Watts: 46W
Efficiency: 91%

Technical Specifications

Listings

UL Listing:

Suitable for wet locations.

Electrical

Voltage:

120 volts AC 60 Hz.

Surge Protection:

Withstands up to 3000 volts.

Manual Override:

Double flip wall switch logic prevents activation by short power outages. Resets after 8 hours. No extra wiring needed.

Switching Capacity:

Controls up to 250 watts Fluorescent @ 120 volts.

Sensor Characteristics

Time Adjustment:

5 seconds to 15 minutes CFL lamps have longer life if Time Adjustment is set to > 7 minutes.

Quick Test Time:

5 seconds test time for fast installation. Works day or night.

Photocontrol:

Deactivates lights during daylight. Fully adjustable for 24 hour operation or custom applications.

Detection:

180° detection.

Other

"No Hands" Auto Testing:

Auto mode starts after 4 minutes of testing. No adjustment needed.

Sensor Case Construction:

Precision molded Lexan.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Construction

Vandal Resistant Lens:

Hard lens resists vandalism.

Built for Severe Conditions:

Double weatherproofing for long life.

Minimum Starting Temperature:

0°F.

Ballast Minimum Starting Temperature:


0°F.

LED Characteristics

LED Detection Indicator:

Glow red day and night for "on-guard" deterrence.

Dimensions

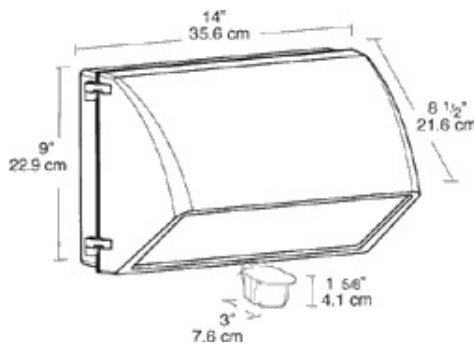

Features

Precision die cast aluminum housing with durable polyester powder coating

Cutoff and standard Wallpacks

LED "on guard" indicator

Can be wired in parallel

Adjustable mini sensor with 180° detection pattern

Sensor color matches fixture

Vandal proof fixtures offer sensor controlled compact fluorescent up to 96 Watts