



Tallpack Compact Fluorescent Quad Tap with Emergency Battery Backup

Color: Bronze

Weight: 9.2 lbs

Project:

Type:

Prepared By:

Date:

Lamp Info

Type: 42W Triple
 Watts: 42W
 Shape/Size: N/A
 Base: N/A
 ANSI: N/A
 Hours: 12,000
 Lamp Lumens: 3200
 Efficacy: 70 LPW

Ballast Info

Type: Elec HPF QT
 120V: N/A
 208V: N/A
 240V: N/A
 277V: 0.17A
 Input Watts: 46W
 Efficiency: 91%

Technical Specifications**Listings****UL Listing:**

Suitable for Wet Locations. Wall Mount Only.

Electrical**Emergency Battery Backup:**

Bodine "Coldpak" will operate the CFL lamp for 90 minutes if power fails. Rated -20°C to +55°C. Battery is a maintenance free NiCad with 7 - 10 year life. Wired for 277V.

Photocell:

277V Photocell Included. Photocell is compatible with 208V-277V.

Ballast Housing:

Stamped steel painted white.

Construction**Reflector:**

Die formed aluminum for wide light distribution. Moveable Glare Shield for field adjustable light control slanted slightly downward for more light on the job.

Housing and Refractor:

Vandal resistant polycarbonate molded refractor. Die cast aluminum back plate.

Ballast Minimum Starting Temperature:

0° F.

Other**Back Plate:**

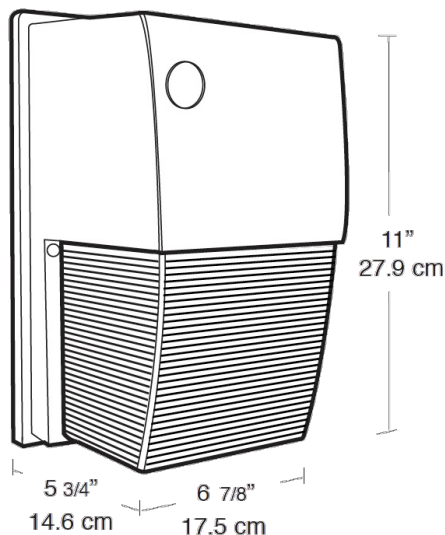
Heavy die cast aluminum. 1/2" bottom conduit knockout. Knockouts for mounting to 3" or 4" junction boxes.

Patents:

The unique RAB Tallpack is protected by U.S. Patent D569,029; China Patent ZL200730149211.2; Taiwan Patent D124,864 and Canada Patent D121,993.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions**Features**

- Emergency battery backup meets NEC requirement
- Test button for required maintenance checks
- Indicator light illuminates when charging
- Maintenance free NiCad battery has 7-10 year life
- CFL lamp included