



Cutoff Wallpack with glare shield for 35 - 100W HPS, 50 - 100W MH (Pulse Start Standard) or 42W CFL. Lens is flat, tempered glass. 30°. cutoff strip included. Lamp supplied.

Color: White

Weight: 5.7 lbs

Project:

Type:

Prepared By:

Date:

Lamp Info

Type: 26W Triple
Watts: 26W
Shape/Size: N/A
Base: N/A
ANSI: N/A
Hours: 12,000
Lamp Lumens: 1800
Efficacy: 62 LPW

Ballast Info

Type: Elec HPF QT
120V: N/A
208V: N/A
240V: N/A
277V: 0.11A
Input Watts: 29W
Efficiency: 90%

Technical Specifications

Listings

UL Listing:

Suitable for wet locations. HID fixtures can be wired with 90°C supply wiring if supply wires are routed 3" away from the ballast.

Construction

Housing:

Die cast aluminum, 1/2" NPS tapped top, both sides and back for conduit or photocontrol. Hinged refractor. Continuous one piece silicone rubber gasket.

Reflector:

Semi-Specular anodized aluminum, removable for installation. Symmetrical light pattern maximizes distance between fixtures.

Finish:

Formulated for high-durability and long lasting color.

Conduit Openings:

Top, side and back.

Template:

Drilling template for easy wall box mounting.

Electrical

Photocell:

Button Photocell 277V included. Photocell is compatible with 208V-277V.

Other


Patents:

Pat. D440,683.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

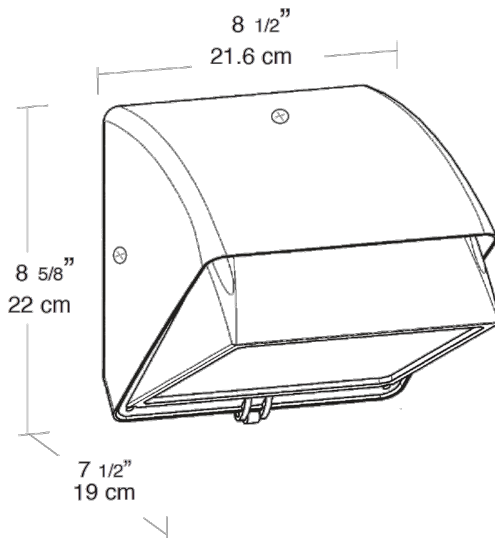

Features

Precision die cast aluminum housing with durable polyester powder coating

Easy access conduit openings & ballasts for fast internal wiring

Long life lamp included

Silicone gasket remains in place during relamping

Cutoff glare shield for "friendly" lighting

Hinged door swings open and remains captive for easy relamping