



CFL Wallpacks

Color: Bronze

Weight: 5.8 lbs

Project:

Type:

Prepared By:

Date:

Lamp Info

Type: 32w Triple
Watts: 32W
Shape/Size: N/A
Base: N/A
ANSI: N/A
Hours: 12,000
Lamp Lumens: 2400
Efficacy: 75 LPW

Ballast Info

Type: Elec HPF QT
120V: 0.31A
208V: 0.2A
240V: 0.2A
277V: 0.13A
Input Watts: 32W

Technical Specifications

Listings

UL Listing:

Suitable for wet locations. HID fixtures can be wired with 90°C supply wiring if supply wires are routed 3" away from the ballast.

Construction

Housing:

Die cast aluminum, 1/2" NPS tapped top, both sides and back for conduit or photocontrol. Hinged refractor. Continuous one piece silicone rubber gasket.

Reflector:

Semi-Specular anodized aluminum, removable for installation. Symmetrical light pattern maximizes distance between fixtures.

Finish:

Formulated for high-durability and long lasting color.

Conduit Openings:

Top, side, and back.

Template:

Drilling template for easy wall box mounting.

Electrical

Photocell:

Button Photocell installed and wired for 120V.

Other


Patents:

Pat. D440,683.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

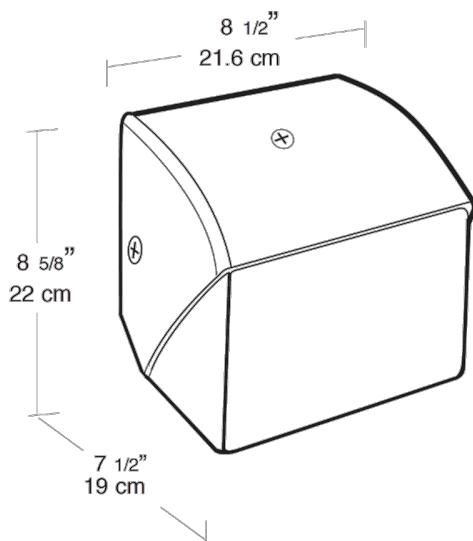

Features

- Silicone gasket remains in place during relamping
- Semi-specular anodized reflector minimizes glare
- Easy access conduit openings & ballasts for fast internal wiring
- Template for easy wall box mounting
- Glass lens won't yellow
- Photocell mounting hole
- Top, sides and back conduit openings
- Precision die cast aluminum housing with durable bronze or white polyester powder coat finish
- Long life lamp supplied