



Wallpack with cutoff glare shield. All aluminum precision die cast construction with tempered glass lens. 30°. cutoff strip included. Lamp supplied.

Color: Bronze

Weight: 11.5 lbs

Project:

Type:

Prepared By:

Date:

Lamp Info

Type: 26W Triple
Watts: 26W
Shape/Size: N/A
Base: N/A
ANSI: N/A
Hours: 12,000
Lamp Lumens: 1800
Efficacy: 62 LPW

Ballast Info

Type: Elec HPF QT
120V: 0.24A
208V: N/A
240V: N/A
277V: N/A
Input Watts: 29W
Efficiency: 90%

Technical Specifications

Electrical

Photocell:

120V Button Photocell Included. Photocell is only compatible with 120V.

Listings

UL Listing:

Suitable for wet locations. HID fixtures can be wired with 90°C supply wiring if supply wires are routed 3" away from ballast.

Construction

Housing:

Die cast aluminum, 1/2" NPS tapped holes top, both sides and back for conduit or photocontrol. Hinged refractor frame. Continuous silicone rubber gasket.

Reflector:

Specular anodized aluminum, removable for installation. Symmetrical light pattern maximizes distance between fixtures.

Cutoff Lens:

Tempered glass.

Finish:

Formulated for high-durability and long lasting color.

Optical

Refractor:


Prismatic optics designed to minimize glare and throw light down and out. Heat resistant borosilicate glass.

Other

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

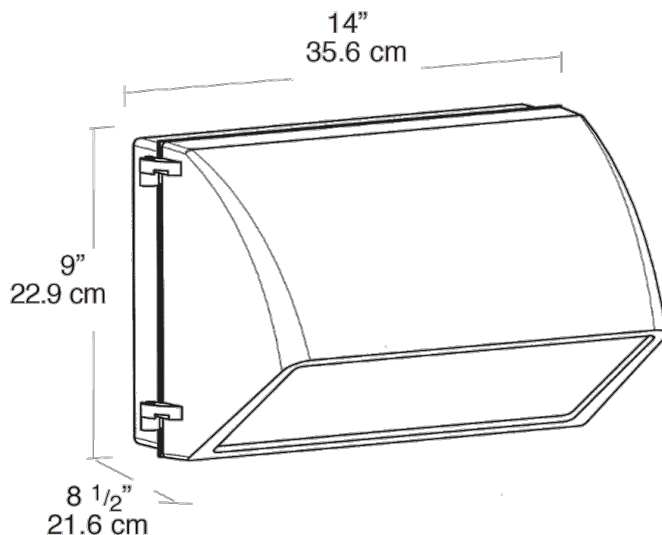

Features

Precision die cast aluminum housing with durable polyester powder coating

Tempered Glass Refractor and Tempered Glass Lens

Drilling template for easy box mounting

Silicone gasket remains in place during relamping

Top, side and back conduit openings

Cutoff Glare Shield for Friendly Lighting

Long life lamp included