



28 thru 42 Watt compact fluorescent Tallpack. Vandal resistant polycarbonate housing. Heavy die-cast aluminum back plate with 1/2" bottom and back conduit opening. Factory installed 120V photocell with bypass cap included. Operating temperature 28w (-20°F), 26, 32 & 42w(0°F). Lamp supplied.

Color: White

Weight: 4.5 lbs

Project:

Type:

Prepared By:

Date:

Lamp Info

Type: 26W Triple
Watts: 26W
Shape/Size: N/A
Base: N/A
ANSI: N/A
Hours: 12,000
Lamp Lumens: 1800
Efficacy: 62 LPW

Ballast Info

Type: Elec HPF QT
120V: 0.24A
208V: 0.2A
240V: 0.18A
277V: 0.11A
Input Watts: 29W
Efficiency: 90%

Technical Specifications

Listings

UL Listing:

Suitable for wet locations.

Construction

Reflector:

Die formed aluminum for wide light distribution. Moveable Glare Shield for field adjustable light control slanted slightly downward for more light on the job.

Housing and Refractor:

Vandal resistant polycarbonate molded refractor. Die cast aluminum back plate.

Ballast Minimum Starting Temperature:

0°F.

Electrical

Ballast Housing:

Stamped steel painted white.

Other

Back Plate:

Heavy die cast aluminum. 1/2" bottom conduit knockout. Knockouts for mounting to 3" or 4" junction boxes.


Patents:

The unique RAB Tallpack is protected by U.S. Patent D569,029; China Patent ZL200730149211.2; Taiwan Patent D124,864 and Canada Patent D121,993.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

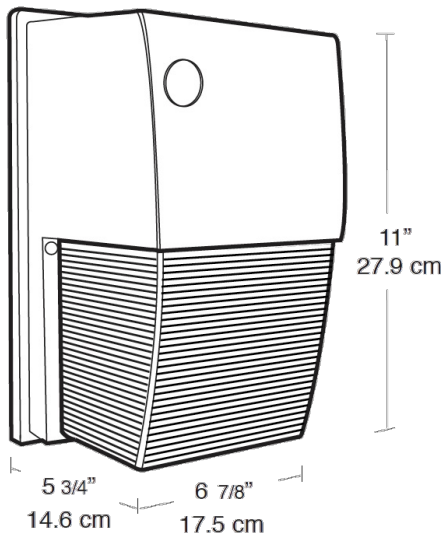

Features

Heavy, die cast aluminum back plate with box mounting template

Shades work great with tallpacks!

1/2" bottom conduit knockout

Packaging has product features, ballast and lamp specifications

Lighting layout photometrics and installation instructions are available